


Truck Mounted Crane
HTS300C



KEY PARAMETER	PARAMETER VALUE
Rated Lifting Moment	300 KN.m
Rated Lifting Capacity	12000 Kg
Boom Length	5.7-19.7 m
Main Outrigger Span	8.0 m
Boom Section	5
Slewing Angle	360°
Max. Boom Elevating Angle	75°
System Rated Pressure	24 Mpa
System Rated Flow	100 L/min
Crane Weight	5600 Kg
Max. Lifting Height	21.5 m
Max. Working Radius	19.35 m
Hydraulic Oil Tank Capacity	240 L

DIAGRAMS

5 Section Boom

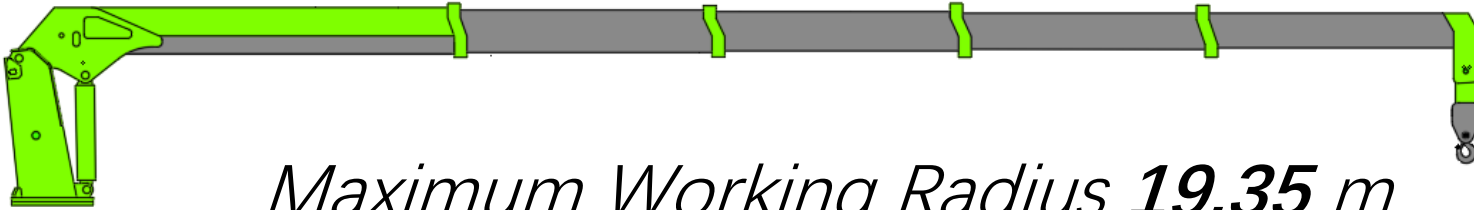

Rated Loads(kg)

Working Radius(m)	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.0	19.35
1	12000	10000	8570	7500	6660	6000																			
2	7000	7000	7000	7000	6220	5600	5090	4660	4300	4000	3730	3500	3290												
3			5400	5400	5400	5400	4900	4500	4150	3850	3600	3370	3170	3000	2840	2700	2450	2250							
4				4500	4500	4500	4360	4000	3690	3420	3200	3000	2820	2660	2520	2400	2180	2000	1840	1710	1600				
5						3000	2720	2500	2300	2140	2000	1870	1760	1660	1570	1500	1360	1250	1150	1070	1000	930	850	800	700

