


Truck Mounted Crane
HTS200B



KEY PARAMETER	PARAMETER VALUE
Rated Lifting Moment	200 KN.m
Rated Lifting Capacity	8000 Kg
Boom Length	5.3-18.1 m
Main Outrigger Span	7.2 m
Boom Section	5
Slewing Angle	360°
Max. Boom Elevating Angle	75°
System Rated Pressure	23 Mpa
System Rated Flow	70 L/min
Crane Weight	4200 Kg
Max. Lifting Height	19.88 m
Max. Working Radius	17.77 m
Hydraulic Oil Tank Capacity	160 L

DIAGRAMS

5 Section Boom

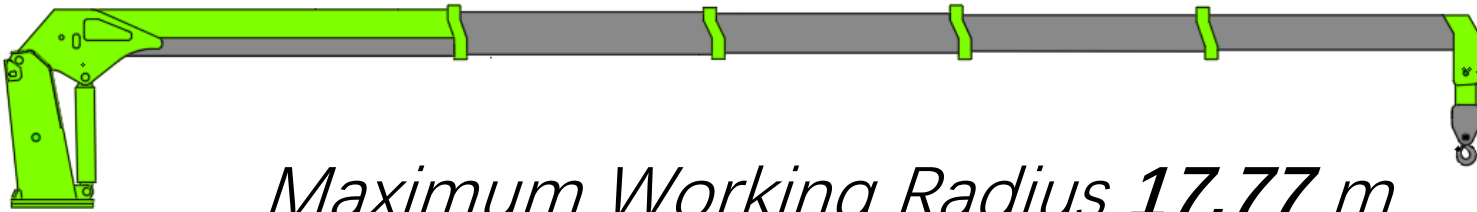

Rated Loads(kg)

Working Radius(m)	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	17.7
1	8000	6660	5700	5000	4440	4000																		
2	6000	5700	5100	4500	4000	3550	3200	2900	2680	2480	2300	2120												
3		5200	4800	4250	3720	3340	2980	2750	2520	2300	2150	1970	1810	1720	1610	1520	1330							
4			3500	3400	3100	2800	2580	2340	2120	1980	1820	1680	1580	1500	1420	1340	1180	1020	900	800				
5					2540	2300	2100	1950	1800	1680	1560	1470	1380	1300	1250	1200	1060	980	880	820	750	680	600	500

