



TL5023

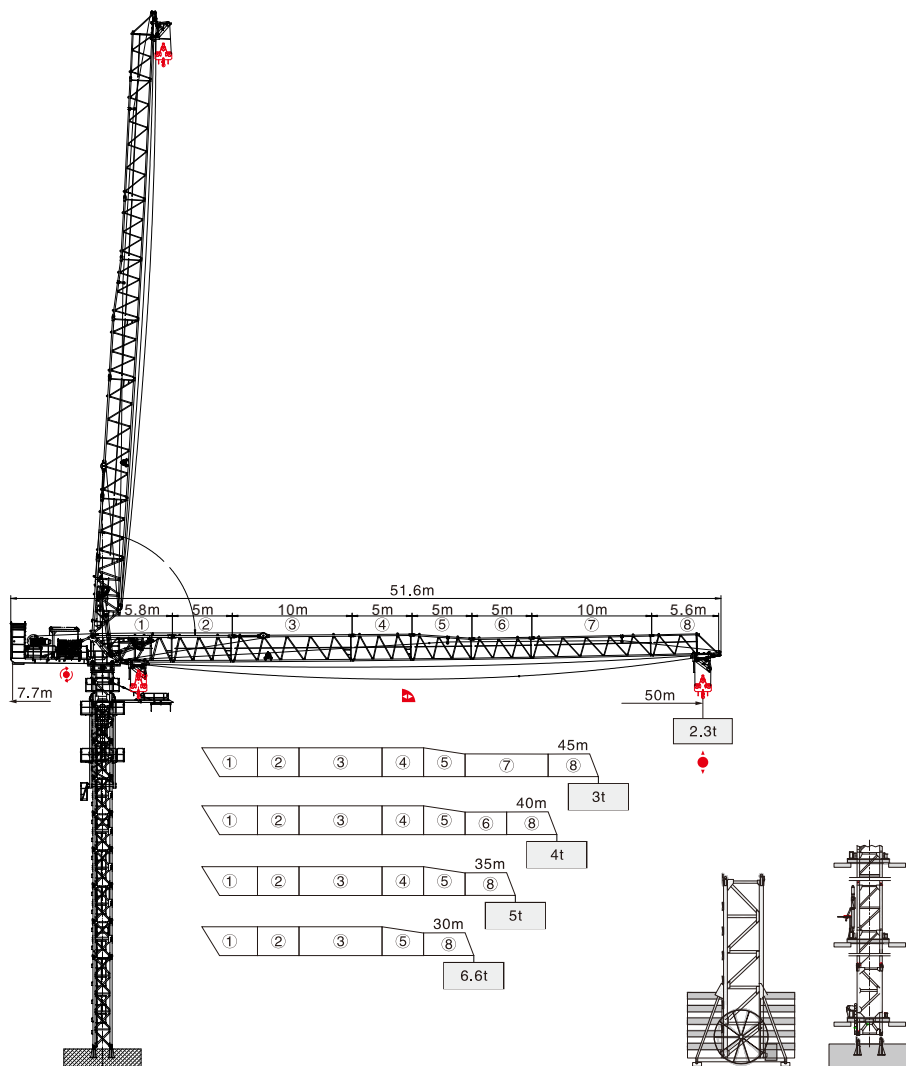


塔身截面 Mast 2m × 2m

固定式 Stationary

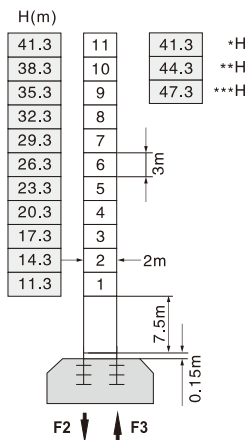


F2	● 140t	■ 205t
F3	● 95t	■ 164t
	⚖ 59t	

行走式 Traveling

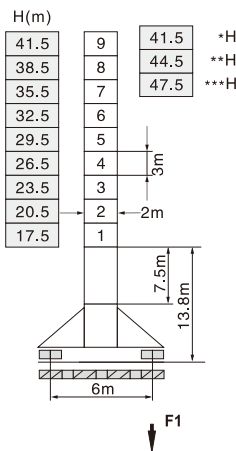

F1	● 87t	■ 123t
	⚖ 65t	

内爬式 Inner climbing

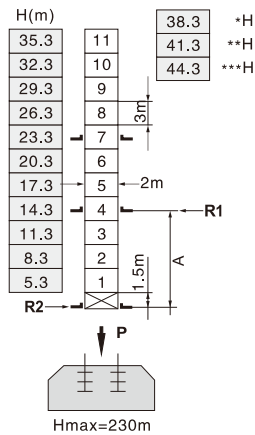

A	12m	18m
R1	33.8t	27.1t
R2	21.4t	16.4t
P	85t	85t
	⚖ 64t	

H 臂根铰点下高度 Height under jib hinge shaft 臂架 Jib +50~45m **40~35m ***30m


● 工作状态 In service

F=固定反力或轮压 Reactions

■ 非工作状态 Out of service

⚖ 自重 Total weight without load and counter weight

附着 Anchorage

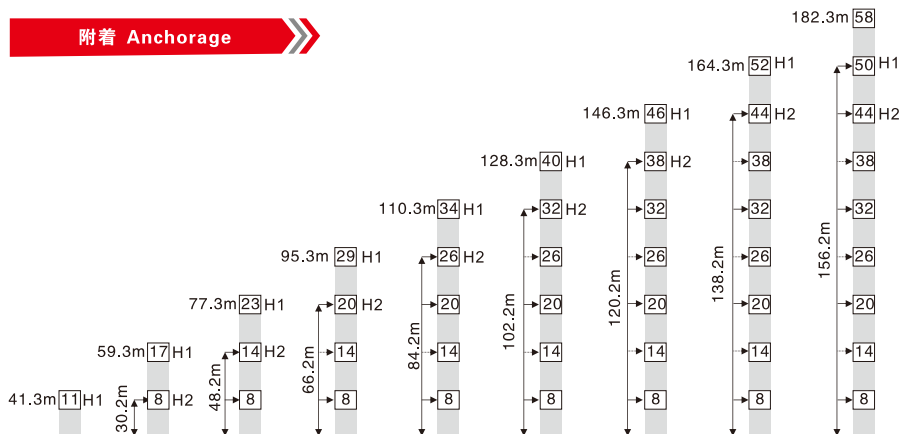


H1—臂根铰点下高度 Height under Jib Hinge Shaft

H2—塔机附着位置距地面的高度 Height of anchorage frame to the ground

① > 182.3m 请向我司咨询 Consult us


塔身截面 Mast 1.6m × 1.6m

固定式 Stationary




F2	● 145t ■ 159t
F3	● 105t ■ 123t
	48t

行走式 Traveling



F1	● 89t ■ 100t
	49t

内爬式 Inner climbing

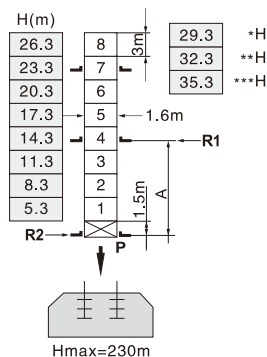


A	7m	12m
R1	31.6t	23.7t
R2	27t	19.5t
P	78t	78t
	52t	

H 臂根铰点下高度 Height under jib hinge shaft 臂架 Jib *50~45m **40~35m ***30m

- 工作状态 In service F=固定反力或轮压 Reactions
- 非工作状态 Out of service 自重 Total weight without load and counter weight

附着 Anchorage

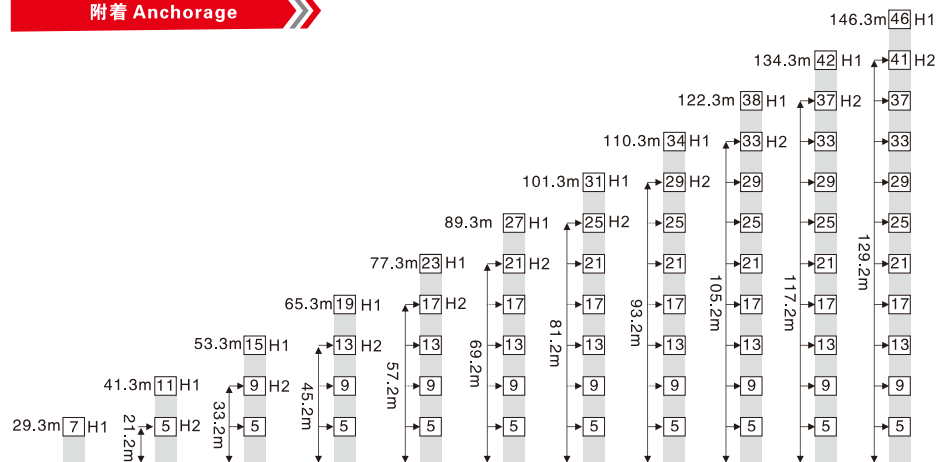

H1—臂根铰点下高度 Height under Jib Hinge Shaft

H2—塔机附着位置距地面的高度 Height of anchorage frame to the ground

① > 149.3m 请向我司咨询 Consult us

载荷特性表(动臂) Load Diagrams(Luffing)

起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	5.6—25.4	30	35	40	45	50
50	Ⅳ	起重重量	8	6.32	4.76	3.77	2.83	2.2
	Ⅱ	Load (t)	4			3.85	2.91	2.3
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	5.3—25.6	30	35	40	45	
45	Ⅳ	起重重量	8	6.36	4.83	3.84	2.92	
	Ⅱ	Load (t)	4			3.92	3	
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.9—25.8	30	35	40		
40	Ⅳ	起重重量	8	6.49	4.94	3.92		
	Ⅱ	Load (t)	4					
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.6—26.1	30	35			
35	Ⅳ	起重重量	8	6.52	5			
	Ⅱ	Load (t)	4					
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.2—26.4	30				
30	Ⅳ	起重重量	8	6.6				
	Ⅱ	Load (t)	4					

载荷特性表(平头) Load Diagrams(Topless)

起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-17.6	20	25	30	35	40	45	50
50	Ⅳ	起重重量	8	6.95	5.4	4.35	3.59	3.02	2.58	2.22
	Ⅱ	Load (t)	4				3.67	3.1	2.66	2.3
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-19.3	20	25	30	35	40	45	
45	Ⅳ	起重重量	8	7.77	6	4.86	4.03	3.41	2.92	
	Ⅱ	Load (t)	4					3.49	3	
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-21.6	25	30	35	40			
40	Ⅳ	起重重量	8	6.81	5.54	4.62	3.92			
	Ⅱ	Load (t)	4							
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-23.1	25	30	35				
35	Ⅳ	起重重量	8	7.35	5.98	5				
	Ⅱ	Load (t)	4							
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-25.2	30						
30	Ⅳ	起重重量	8	6.6						
	Ⅱ	Load (t)	4							

配重配置表 Counter Weight

		5000kg	5000kg	1000kg	 kg
50m	7.7m	1	3	3	23000
45m	7.7m	1	3	1	21000
40m	7.7m	1	3	1	21000
35m	7.7m	1	3	0	20000
30m	7.7m	1	2	3	18000

机构特性 Mechanisms

机构名称 Name	机构型号 Model				功率 Power		
起升 Hoisting 	60LVF20	m/min	t	m/min	t	620m 变频控制 Inverter Control	45Kw
		0-50	4	0-25	8		
		0-100	2	0-50	4		
液压 Hydraulic 	THDC-125000-HS	min	≤3.0			变频控制 Inverter Control	30Kw
变幅 Trolley 	40BPX65	m/min	0-56			变频控制 Inverter Control	4Kw
回转 Slewing 	RCV95	r/min	0-0.7			变频控制 Inverter Control	2×95Nm
	RVF95	r/min	0-0.7				2×5.5Kw
行走 Traveling 	RT324	m/min	0-24			变频控制 Inverter Control	2×5.2Kw
电网/Power Supply				380V/50Hz 440V/60Hz (±5%)			
供电容量/Necessary Power				108KVA/121KVA (traveling)			

※ 本技术参数不受法律约束，技术信息请详见相应技术说明书。
Specifications and data is not legally binding.
For any technical information, please refer to the corresponding instructions.