


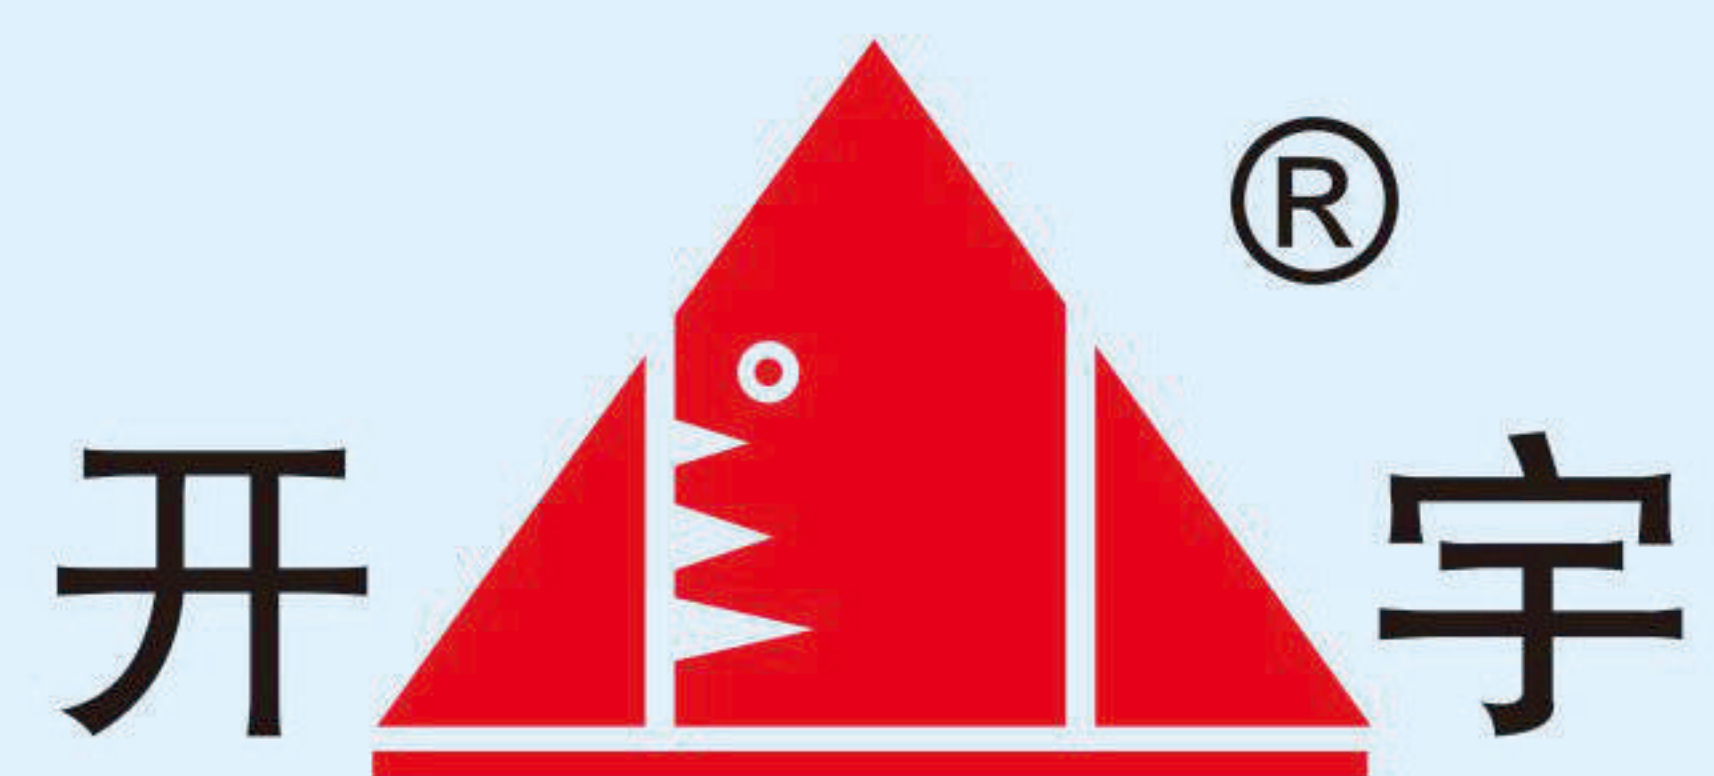

开宇（浙江）钎具有限公司
KAIYU (ZHEJIANG) DRILLING TOOLS CO., LTD

KAYU DRILLING BITS

公司简介 COMPANY INSTRUCTION

开宇（浙江）钎具有限公司位于长三角南翼甬台经济都市区，中国制造业基地——台州。

公司以创新、创优、创名理念重组，技术力量雄厚，有一批专业擅长的高科技人员为骨干，培养了一支敢于拼搏、勇于创新的尖子团队。并严格按照ISO2015认证管理及国家标准GB/T6480-2015生产。以“4.0”为目标，既传承了几十年经验沉甸，又紧跟时代工业变革潮流，全面进行设备更新换代，做到内吸外引，不断充实自我，使老产品得到质的提升，新产品多元完善，目前拥有钻速快、功率大的高、中、低风压潜孔钻头及特异钻头，满足了用户的需求。用户的需求就是我们的目标。

公司以诚信为本，视“今日质量、明日市场”为宗旨。以优良的品质、齐全的品种，合理的价格，完善的服务，良好的口碑，赢得了市场。产品畅销全国各地，远销欧美、亚非拉诸多国家和地区，享有盛誉。

“开宇”钎具将再接再厉，不负厚望，与海内外新老朋友，携手共进，共铸辉煌！

Kaiyu (Zhejiang) Drilling Tools Co.,Ltd.with former company named “Zhejiang Kaiyu Drilling Bits Co.,Ltd” , is located in Southeast coastal Zhejiang----Taizhou. economically developed and of convenient transportation, is devoted to researching and developing high-quality rock drilling bits. Kaiyu Limited is one of the backbone enterprises among the wide domestic industry of rock-drilling tools.

Our company has owned numerous experienced and high-tech talents, introduced foreign advanced equipment and technologies and passed through ISO9001: 2015

Quality Management System Certification. With unique techniques and specialized equipment, our products have been tested by complete quality-control inspection system, and reached the advanced level both at home and at abroad. Our Chisel Horse Bits, Cross-type Bits, Pole Teeth-type Bits, DTH Bits, DHD Bits and so on have been widely used in the metallurgy, mining, geological drilling, hydro-power, transportation, tunneling, quarrying, etc.

Our company have been always faithful to customers, and we hold tightly on to the aim "today, we've the quality; Tomorrow, we've the market". Thanks to excellent quality, complete varieties, reasonable prices and perfect services, our products have all the time won vast customers' trust and praise. Our products have been not only sold in domestic China, but also exported to Europe, Africa, Southeast Asia, The Middle East and other countries and regions.

In the new century, "Kaiyu" brand is willing to work hand in hand with both new and old friends at home and at abroad to achieve more glorious results.



企业文化

一、企业目标

1、战略目标

做精、做强、做大、创新、创优、创名。

2、管理目标

实现社会效益、客户效益、员工效益、企业效益的最大化。

3、岗位目标

岗位成才，质量创效，服务升值。

二、企业愿景

成为全球钎具生产行业最具竞争力的公司之一，
铸百年卓越开宇，创国际经典品牌。

三、企业宗旨

服务客户，关爱员工，回报社会。

四、经营理念

人本管理，诚信双赢

五、开宇精神

高效、卓越、服务、奉献。

六、企业道德

待人忠，办事诚，服务好，以德赢人；
质量优，信誉好，创业实，以德兴业。

七、开宇作风

脚踏实地，精益求精；快速应变，雷厉风行。

八、开宇价值观

以人为本，诚信立业，利益共享，共筑辉煌。


领航未来







钎头类型 Drill Bit	直径 diameter		内孔直径 ID diameter (mm)	水孔数量 flushing hole	锥度 taper	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英寸 inch					
一字马蹄型钎头 Chisel Horse Bit 	28	1 1/10	19	2	7° 11° 12°	0.15	Y ₁ 28-719
	30	1 1/5	19	2		0.18	Y ₁ 30-719
	32	1 1/4	22	2		0.21	Y ₁ 32-722
	34	1 1/3	22	2		0.22	Y ₁ 34-722
	36	1 7/16	22	2		0.26	Y ₁ 36-722
	38	1 1/2	22	2		0.31	Y ₁ 38-722
	40	1 6/19	22	2		0.35	Y ₁ 40-722
	42	1 11/16	22	2		0.39	Y ₁ 42-722
	43	1 7/10	22	2		0.41	Y ₁ 43-722
	44	1 3/4	22	2		0.45	Y ₁ 44-722
	46	1 4/5	22	2		0.48	Y ₁ 46-722
	48	1 9/10	22	2		0.50	Y ₁ 48-722
	50	2 12/13	22	2		0.52	Y ₁ 50-722
	60	2 5/12	24	2		0.68	Y ₁ 60-724
斜假刃型钎头 Slanting Forging Flanged Bit 	20	5/6	15	2	4°	0.09	Y ₂ 20-415
	22	7/8	16	2		0.10	Y ₂ 22-416
	24	8/9	16	2		0.12	Y ₂ 24-416
	26	1	18	2		0.14	Y ₂ 26-418
	28	1 1/10	19	2	7° 11° 12°	0.15	Y ₂ 28-719
	30	1 1/5	19	2		0.18	Y ₂ 30-719
	32	1 1/4	22	2		0.21	Y ₂ 32-722
	34	1 1/3	22	2		0.22	Y ₂ 34-722
	36	1 7/16	22	2		0.26	Y ₂ 36-722
	38	1 1/2	22	2		0.31	Y ₂ 38-722
	40	1 6/19	22	2		0.35	Y ₂ 40-722
	42	1 11/16	22	2		0.39	Y ₂ 42-722
	43	1 7/10	22	2		0.41	Y ₂ 43-722
	44	1 3/4	22	2		0.45	Y ₂ 44-722
	46	1 4/5	22	2		0.48	Y ₂ 46-722

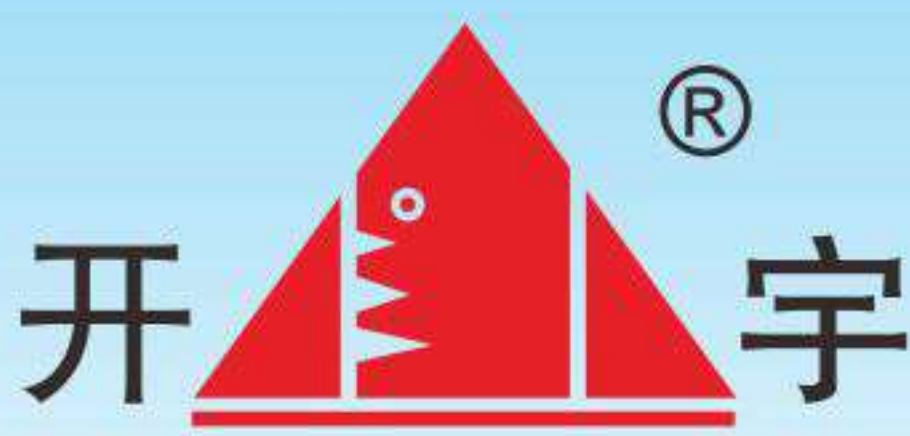

锥度连接钎具
Tapered Rock Drilling Tools

钎头类型 Drill Bit	直径 diameter		内孔直径 ID diameter (mm)	水孔数量 flushing hole	锥度 taper	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英寸 inch					
十字型钎头 Cross Bit	28	1 1/9	19	2	7° 11° 12°	0.18	S ₁ 28-719
	30	1 1/5	19	2		0.19	S ₁ 30-720
	32	1 1/4	22	2		0.22	S ₁ 32-722
	34	1 1/3	22	2		0.25	S ₁ 34-722
	36	1 7/16	22	2		0.28	S ₁ 36-722
	38	1 1/2	22	2		0.32	S ₁ 38-722
	40	1 6/19	22	2		0.36	S ₁ 40-722
	42	1 11/16	22	2		0.40	S ₁ 42-722
	44	1 3/4	22	2		0.45	S ₁ 44-722
	46	1 4/5	22	2		0.50	S ₁ 46-722
	48	1 9/10	22	2		0.55	S ₁ 48-722
	50	2 12/13	22	2		0.58	S ₁ 50-722
	50	2 12/13	24	2		0.58	S ₁ 50-724
	55	2 3/20	22	2		0.70	S ₁ 55-722
	55	2 3/20	24	2		0.70	S ₁ 55-724
	60	2 5/12	22	2		0.79	S ₁ 60-722
	60	2 5/12	24	2		0.79	S ₁ 60-724
	65	2 11/20	22	2		1.30	S ₁ 65-722
	65	2 11/20	24	2		1.30	S ₁ 65-724
	70	2 3/4	24	2		2.10	S ₁ 70-724





钎头类型 Drill Bit	直径 diameter		合金 Button size (mm)		水孔数量 flushing hole	锥度 taper	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英寸 inch	边齿 Gauge Button	中齿 Front Button				
四齿柱齿钎头 4Buttons Button Bit 	28	1 1/10	3x6	1x6	3	7° 11° 12°	0.16	Q ₄ 28-719
	30	1 1/5	3x7	1x6	3		0.19	Q ₄ 30-719
	32	1 1/4	3x8	1x7	3		0.21	Q ₄ 32-722
	34	1 1/31	3x8	1x8	3		0.23	Q ₄ 34-722
	36	7/16	3x8	1x8	3		0.26	Q ₄ 36-722
	38	1 1/2	3x9	1x8	3		0.31	Q ₄ 38-722
	40	1 6/19	3x9	1x9	3		0.34	Q ₄ 40-722
	42	1 11/16	3x9	1x9	3		0.37	Q ₄ 42-722
五齿柱齿钎头 5Buttons Button Bit 	32	1 1/4	4x7	1x7	3	7° 11° 12°	0.21	Q ₅ 32-722
	34	1 1/3	3x8	2x7	3		0.24	Q ₅ 34-722
	36	1 7/16	3x8	2x7	3		0.27	Q ₅ 36-722
	38	1 1/2	3x8	2x8	3		0.31	Q ₅ 38-722
	40	1 6/19	4x9	1x8	3		0.35	Q ₅ 40-722
	42	1 11/16	4x9	1x8	3		0.38	Q ₅ 42-722
六齿柱齿钎头 6Buttons Button Bit 	32	1 1/4	4x7	2x6	3	7° 11° 12°	0.23	Q ₆ 32-722
	34	1 1/3	4x7	2x7	3		0.27	Q ₆ 34-722
	36	1 7/16	4x8	2x7	3		0.29	Q ₆ 36-722
	38	1 1/2	4x8	2x8	3		0.32	Q ₆ 38-722
	40	1 6/19	4x8	2x8	3		0.36	Q ₆ 40-722
	42	1 11/16	4x8	2x8	3		0.39	Q ₆ 42-722
七齿柱齿钎头 7Buttons Button Bit 	32	1 1/4	5x7	2x6	3	7° 11° 12°	0.23	Q ₇ 32-722
	34	1 1/3	5x7	2x6	3		0.25	Q ₇ 34-722
	36	1 7/16	5x7	2x7	3		0.28	Q ₇ 36-722
	38	1 1/2	5x8	2x7	3		0.35	Q ₇ 38-722
	40	1 6/19	5x8	2x8	3		0.36	Q ₇ 40-722
	42	1 11/16	5x9	2x8	3		0.40	Q ₇ 42-722
	50	2 12/13	5x9	2x9	3		0.65	Q ₇ 50-724
八齿柱齿钎头 8Buttons Button Bit 	32	1 1/4	5x6	2x6	3	7° 11° 12°	0.24	Q ₈ 32-722
	34	1 1/3	5x7	2x6	3		0.25	Q ₈ 34-722
	36	1 7/16	5x7	2x7	3		0.30	Q ₈ 36-722
	38	1 1/2	6x8	2x7	3		0.36	Q ₈ 38-722
	40	1 6/19	5x8	2x8	3		0.37	Q ₈ 40-722
	42	1 11/16	5x8	2x8	3		0.40	Q ₈ 42-722



钎头类型 Drill Bit	直径 diameter		螺纹 Thread	水孔数量 flushing hole	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英寸 inch				
十字螺纹钎头 Thread Cross Bit 	36	1 7/16	R25	3	0.55	S ₁ 36-R25
	38	1 1/2	R25	3	0.60	S ₁ 38-R25
	41	1 5/8	R25	3	0.65	S ₁ 41-R25
	45	1 3/4	R25	3	0.80	S ₁ 45-R25
	48	1 7/8	R25	3	0.95	S ₁ 48-R25
	45	1 3/4	R32	3	0.75	S ₁ 45-R32
	48	1 7/8	R32	3	0.90	S ₁ 48-R32
	51	2	R32	3	1.20	S ₁ 51-R32
	54	2 1/8	R32	3	1.50	S ₁ 54-R32
	57	2 1/4	R32	5	1.90	S ₁ 57-R32
	64	2 1/2	R32	5	2.30	S ₁ 64-R32
	64	2 1/2	T38	5	2.00	S ₁ 64-T38
	76	3	T38	5	2.60	S ₁ 76-T38
	89	3 1/2	T38	5	3.00	S ₁ 89-T38
	76	3	T45	5	2.40	S ₁ 76-T45
	89	3 1/24	T45	5	2.80	S ₁ 89-T45
	102	4	T45	5	3.30	S ₁ 102-T45

钎头类型 Drill Bit	直径 diameter		合金 Button size (mm)		边齿角 Gauge Button Angle	水孔数量 flushing hole	螺纹型号 Thread	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英寸 inch	边齿 Gauge Button	中齿 Front Button					
R25-R32球齿钎头 R25-R32 Button Bit 	38	1 1/2	5x9	2x8	30°	3	R25	0.59	Q ₇ 38-R25
	41	1 5/8	5x9	2x8	30°	3	R25	0.55	Q ₇ 41-R25
	45	1 3/4	5x10	2x9	30°	3	R25	0.56	Q ₇ 45-R25
	38	1 1/2	5x9	2x8	30°	3	R28	0.57	Q ₇ 38-R28
	41	1 5/8	5x9	2x8	30°	3	R28	0.59	Q ₇ 41-R28
	45	1 3/4	5x10	2x9	30°	3	R28	0.79	Q ₇ 45-R28
	48	1 7/8	5x9	2x8	30°	3	R28	0.82	Q ₇ 48-R28
	41	1 5/8	5x9	2x8	30°	3	R32	0.64	Q ₇ 41-R32
	43	1 11/16	5x10	2x8	30°	3	R32	0.66	Q ₇ 43-32R
	45	1 3/4	5x10	2x9	30°	3	R32	0.77	Q ₇ 45-R32
	48	1 7/8	5x10	2x9	30°	3	R32	0.76	Q ₇ 48-R32
	51	2	5x10	2x9	30°	3	R32	0.95	Q ₇ 51-R32




钎头类型 Drill Bit	直径 diameter		合金 Button size (mm)		边齿角 Gauge Button Angle	水孔数量 flushing hole	螺纹型号 Thread	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英寸 inch	边齿 Gauge Button	中齿 Front Button					
R38/T38 螺纹球齿钎头 R38/T38 Button Bit	64	2 1/2	6x12	3x11	30°	3	R38	1.70	QY ₉ 64-R38
	64		8x10	4x10	30°	32	R38	1.75	QY ₁₂ 64-R38
	76	3	8x12	4x11	30°	4	R38	2.34	QY ₁₂ 76-R38
	76		8x12	5x11	35°	4	R38	2.40	QY ₁₃ 76-R38
	64	2 1/2	6x12	3x11	35°	4	T38	1.65	Q ₉ 64-T38
	64	2 1/2	8x10	4x10	30°	2	T38	1.75	Q ₁₂ 64-T38
	76	3	8x12	4x11	30°	4	T38	2.60	Q ₁₂ 76-T38
	76		8x12	5x11	30°	4	T38	3.46	Q ₁₃ 76-T38
	89	3 1/2	8x14	4x12	35°	2	T38	3.30	Q ₁₂ 89-T38
	89		8x12	6x12	35°	4	T38	3.38	Q ₁₄ 89-T38
T45/T51 螺纹球齿钎头 T45/T51 Button Bit	76	3	8x12	4x12	35°	4	T45	2.54	Q ₁₂ 76-T45
	76		8x12	5x11	30°	4	T45	2.61	Q ₁₃ 76-T45
	89	3 1/2	8x12	5x12	35°	4	T45	4.20	Q ₁₃ 89-T45
	89		8x12	6x12	35°	3	T45	4.50	Q ₁₄ 89-T45
	102	4	8x14	7x12	35°	4	T45	4.80	Q ₁₄ 102-T45
	115	4 11/20	8x14	8x12	35°	4	T45	6.35	Q ₁₆ 115-T45
	76	3	8x12	4x12	30°	3	T51	2.73	QY ₁₂ 76-T51
	89	3 1/2	8x12	4x12	40°	4	T51	4.50	QY ₁₂ 89-T51
	89		8x12	6x12	35°	4	T51	4.80	QY ₁₄ 89-T51
T38/T45 螺纹易返球齿钎头 T38/45 Retractable Button Bit	64	2 1/2	8x10	4x10	30°	4	T38	2.00	QY ₁₂ 64-T38
	70	2 3/4	8x11	4x10	35°	4	T38	2.40	QY ₁₂ 70-T38
	76	3	8x11	4x11	35°	2	T38	3.45	QY ₁₂ 76-T38
	76		8x12	5x11	30°	4	T38	3.45	QY ₁₃ 76-T38
	89	3 1/2	8x12	6x11	30°	2	T38	5.40	QY ₁₄ 89-T38
	70	1 3/4	8x10	4x10	30°	4	T45	2.28	QY ₁₂ 70-T45
	76	3	8x10	4x10	35°	5	T45	3.20	QY ₁₂ 76-T45
	76		8x12	5x11	30°	4	T45	3.30	QY ₁₃ 76-T45
	80	3 1/6	8x12	6x11	35°	4	T45	3.95	QY ₁₄ 89-T45
	89	3 1/2	8x12	5x12	30°	4	T45	5.10	QY ₁₃ 89-T45
	89		8x14	6x12	30°	4	T45	5.45	QY ₁₄ 89-T45
	102	4	8x12	7x12	35°	2	T45	8.20	QY ₁₅ 102-T45



钎头类型 Drill Bit	直径 diameter		合金 Button size (mm)			花键齿数 Spline No.	水孔数量 flushing hole	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英寸 inch	边齿 Gauge Button	中齿 Front Button	正面齿 Front Button				
CIR65 低风压钻头 CIR65 DTH Button Bit 	65	2 3/5	4x12	/	3x10	6	2	1.40	CIR65-65
CIR70低风压钻头 CIR70 DTH Button Bit 	76	3	5X13	/	3x12	6	2	2.20	CIR70-76
CIR90低风压钻头 CIR90 DTH Button Bit 	90	3 1/2	6x14	2x13	2x12	6	2	3.60	CIR90-90
	100	4	6x14	2x13	3x12	6	3	4.10	CIR90-100
	105	4	6x14	2x13	2x12	6	3	4.45	CIR90-105
	110	4 1/3	6x14	3x13	3x12	6	3	4.90	CIR90-110
	115	4 1/2	6x14	3x13	3x12	6	3	5.20	CIR90-115
	120	4 3/4	7x14	4x13	4x12	6	3	5.50	CIR90-120
	125	4 9/10	7x14	4x13	4x12	6	3	5.80	CIR90-125
	130	5 1/10	7x14	4x13	4x12	6	3	6.20	CIR90-130
CIR110低风压钻头 CIR110 DTH Button Bit 	110	4 1/3	6x14	3x13	3x12	6	3	6.35	CIR110-110
	120	4 3/4	7x14	4x13	4x12	6	3	7.10	CIR110-120
	130	5 1/10	7x14	4x14	4x12	6	3	7.70	CIR110-130
	140	5 1/2	7x14	4x14	4x12	6	3	9.50	CIR110-140
	150	6	9x14	6x14	4x12	6	3	10.50	CIR110-150
	160	6 2/7	9x14	6x14	4x12	6	3	11.00	CIR110-160
	170	6 5/7	9x15	6x14	4x12	6	3	12.80	CIR110-170
CIR130低风压钻头 CIR130 DTH Button Bit 	140	5 1/2	7x14	4x14	4x12	6	3	12.00	CIR130-140
	150	5 8/9	9x14	6x14	4x12	6	3	13.40	CIR130-150
	160	6 2/7	9x14	6x14	4x12	6	3	14.00	CIR130-160
	170	6 5/7	9x15	6x14	4x12	6	3	16.50	CIR130-170
	175	6 9/10	9x16	6x16	5x14	6	3	18.00	CIR130-175




钎头类型 Drill Bit	直径 diameter		合金 Button size (mm)			花键齿数 Spline No.	水孔数量 flushing hole	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英寸 inch	边齿 Gauge Button	中齿 Front Button	正面齿 Front Button				
CIR150低风压钻头 CIR150 DTH Button Bit 	150	5 8/9	9x14	6x14	4x12	6	3	14.90	CIR150-150
	155	6 1/5	9x14	6x14	4x12	6	3	15.20	CIR150-155
	165	6 3/5	9x16	6x14	5x14	6	3	17.80	CIR150-165
	175	7	9x16	6x16	5x14	6	3	19.30	CIR150-175
	180	7	9x16	6x16	6x14	6	3	19.60	CIR150-180
	185	7 1/5	9x16	6x16	6x14	6	3	19.80	CIR150-185
	200	7 9/10	9x16	6x16	6x14	6	3	24.20	CIR150-200
	220	8 7/10	12x16	9x16	8x14	6	3	27.00	CIR150-220
CIR170低风压钻头 CIR170 DTH Button Bit 	175	6 8/9	9x16	6x16	5x14	6	3	21.00	CIR170-175
	185	7 5/16	9x16	6x16	6x14	6	3	21.80	CIR170-185
	200	7 7/8	11x16	6x16	10x14	6	3	26.30	CIR170-200
	220	8 11/16	12x16	9x16	8x14	6	3	28.00	CIR170-220
	250	9 13/16	15x16	6x16	8x14	6	3	36.50	CIR170-250
BMK110 十字型 Cross Bit 	110	4 1/3	/	/	1*12	4	1	3.80	P110-S110
BMK110球齿型 Button Bit 	110	4 1/3	8x12	4x12	2x12	4	2	4.00	P110-A110
	110	4 1/3	8x12	4x12	3x12	4	2	4.25	P110-B110
	110	4 1/3	8x13	4x12	3x12	4	2	4.65	P110-C110
	110	4 1/3	8x14	4x12	3x12	4	2	5.20	P110-D110

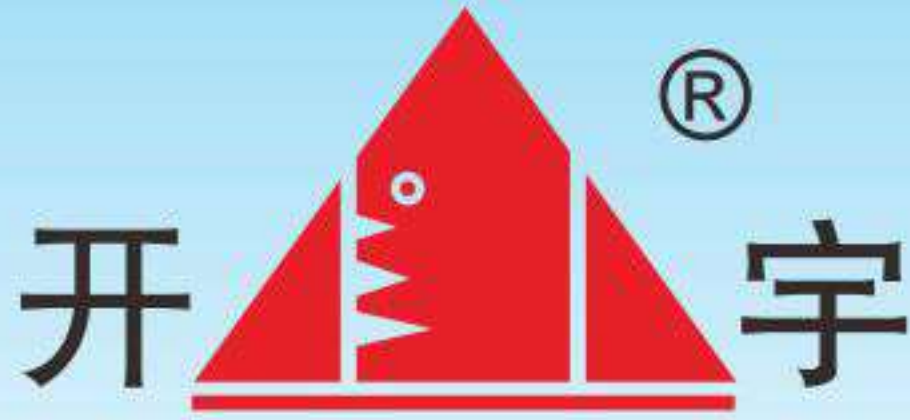

潜孔钎头
Down The Hole Bits

钎头类型 Drill Bit	直径 diameter		边齿 Gauge Button	水孔数量 flushing hole	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英寸 inch				
	90	3 9/16	7*14	2	4.8	KY35A-90
	95	3 3/4	7*14	2	5	KY35A-95
	100	3 15/16	7*14	2	5.3	KY35A-100
	105	4 1/8	7*14	2	5.5	KY35A-105
	105	4 1/8"	7*14	2	7.6	KY45A-105
	110	4 5/16"	7*16	2	7.8	KY45A-110
	115	4 1/2"	7*16	2	8.2	KY45A-115
	120	4 3/4"	7*16	2	8.7	KY45A-120
	125	4 15/16"	7*16	2	8.9	KY45A-125
	130	5 1/8"	7*16	2	9.4	KY45A-130
	138	5 1/2"	7*18	2	15.2	KY55A-138
	146	5 3/4"	7*18	2	15.8	KY55A-146
	152	6"	7*18	2	18.2	KY55A-152
	165	6 1/2"	7*18	3	22	KY55A-165
	152	6 1/16"	8*18	2	22.9	KY65A-152
	165	6 1/2"	8*18	2	23.3	KY65A-165
	180	7 1/16"	9*18	3	25.8	KY65A-180
	190	7 1/2"	9*18	3	28	KY65A-190
	195	7 5/8"	9*18	3	29.7	KY65A-195
	203	8"	10*18	3	31	KY65A-203
	203	8	10*18	2	47.8	KY85A-203
	216	8 1/2"	10*18	2	52.9	KY85A-216
	219	8 5/8"	10*18	2	54	KY85A-219


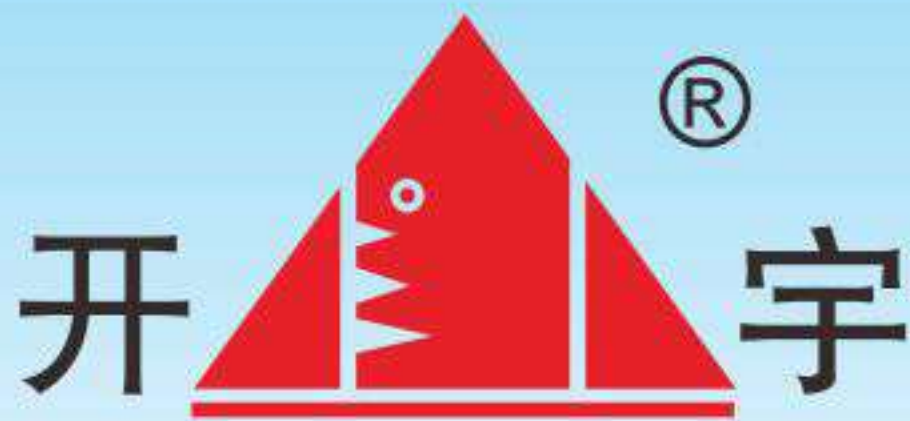


高风压潜孔冲击器 Down The Hole High Air Hammer






解剖图 Explosive	零部件名称 Part Name	零件编号 Part Number				
	1. 后接头Top Sub	KY35A-01	KY40A-01	KY50A-01	KY60A-01	KY80A-01
	2. O型圈 O-ring	KY35A-02	KY40A-02	KY50A-02	KY60A-01	KY80A-01
	3. 顶头 Cap	KY35A-03	KY40A-03	KY50A-03	KY60A-01	KY80A-01
	4. 逆止阀 Check Valve	KY35A-04	KY40A-04	KY50A-04	KY60A-01	KY80A-01
	5. 弹簧 Spring	KY35A-05	KY40A-05	KY50A-05	KY60A-01	KY80A-01
	6. 阀座 Air Distributor	KY35A-06	KY40A-06	KY50A-06	KY60A-01	KY80A-01
	7. 气缸 Cylinder	KY35A-07	KY40A-07	KY50A-07	KY60A-01	KY80A-01
	8.活塞 Piston	KY35A-08	KY40A-08	KY50A-08	KY60A-01	KY80A-01
	9.导向套Guide Sleeve	KY35A-09	KY40A-09	KY50A-09	KY60A-01	KY80A-01
	10.卡环 Bit Retainer Ring	KY35A-10	KY40A-10	KY50A-10	KY60A-01	KY80A-01
	11. 接头O型圈 O-ring	KY35A-11	KY40A-11	KY50A-11	KY60A-01	KY80A-01
	12. 前接头 Driver Sub	KY35A-12	KY40A-12	KY50A-12	KY60A-01	KY80A-01
	13. 外套管 Outer Sleeve	KY35A-13	KY40A-13	KY50A-13	KY60A-01	KY80A-01

KY Series Hammers 3.5" - 8"					
型号 MODEL (SIZE)	KY35A (3.5")	KY40A (4")	KY50A (5")	KY60A (6")	KY80A (8")
尾柄类型 BIT SHANK TYPE	DHD3.5	DHD340A	DHD350	DHD360	DHD380
	COP32	COP44	COP54	COP64	COP84
	QI30	QI40	QI50	QI60	QI80
	/	MISSION40	MISSION50	MISSION60	MISSION80
孔直径 HOLE DIA.	89 – 110mm (3.5" – 4.3")	115 – 140mm (4.53" – 5.5")	138–165mm (5.43" – 6.5")	152 – 203mm (6" – 8")	200 – 254mm (7-7/8" – 10")
外径 HAMMER O.D.	82mm (3.2")	99mm (3.9")	126mm (5")	148mm (5.8")	180mm (7.1")
工作压力 WORKING PRESSURE	12–24bar (174–348psi)	12–24bar (174–348psi)	12–24bar (174–348psi)	12–24bar (174–348psi)	12–24bar (174–348psi)
长度 LENGTH	899mm (35.4")	1030mm (40.55")	1187mm (46.73")	1240mm (48.82")	1359mm (53.5")
重量 WEIGHT	25.0kg (55.1lb)	38.0kg (66.11lb)	72.5kg (159.78lb)	99.0kg (218.18lb")	180.0kg (396.7lb)
连接方式 TOP SUB CONNECTION	2–3/8" API REG PIN	2–3/8" API REG PIN	2–3/8" API REG PIN	3–1/2" API REG PIN	4–1/2" API REG PIN

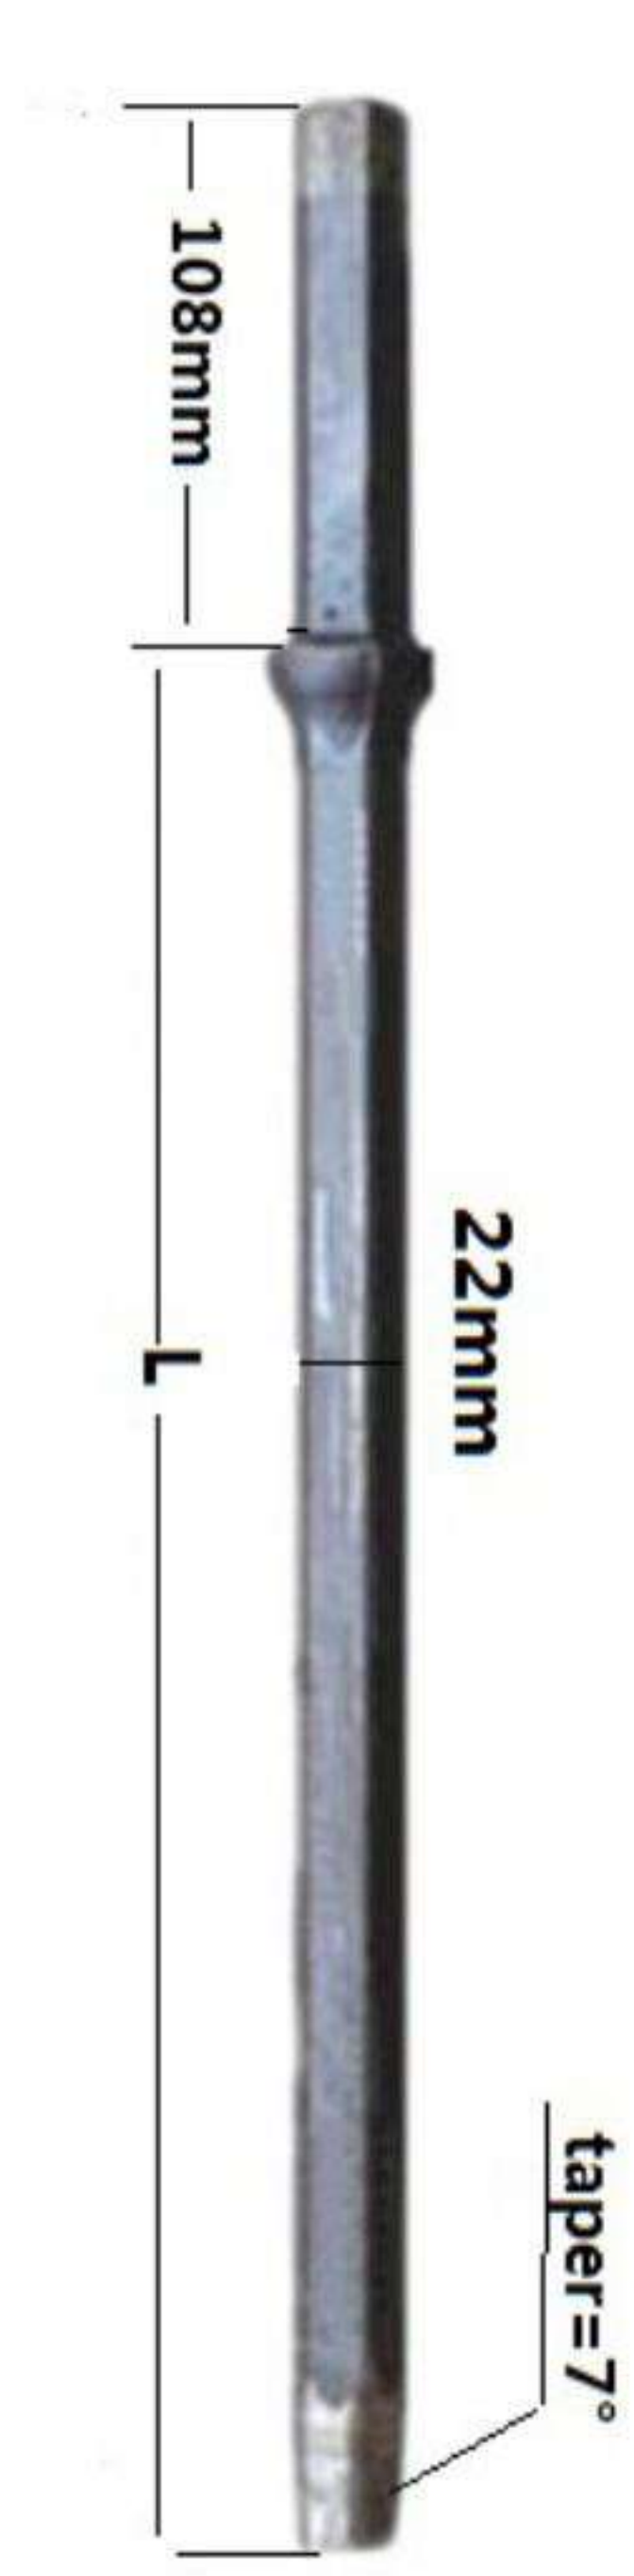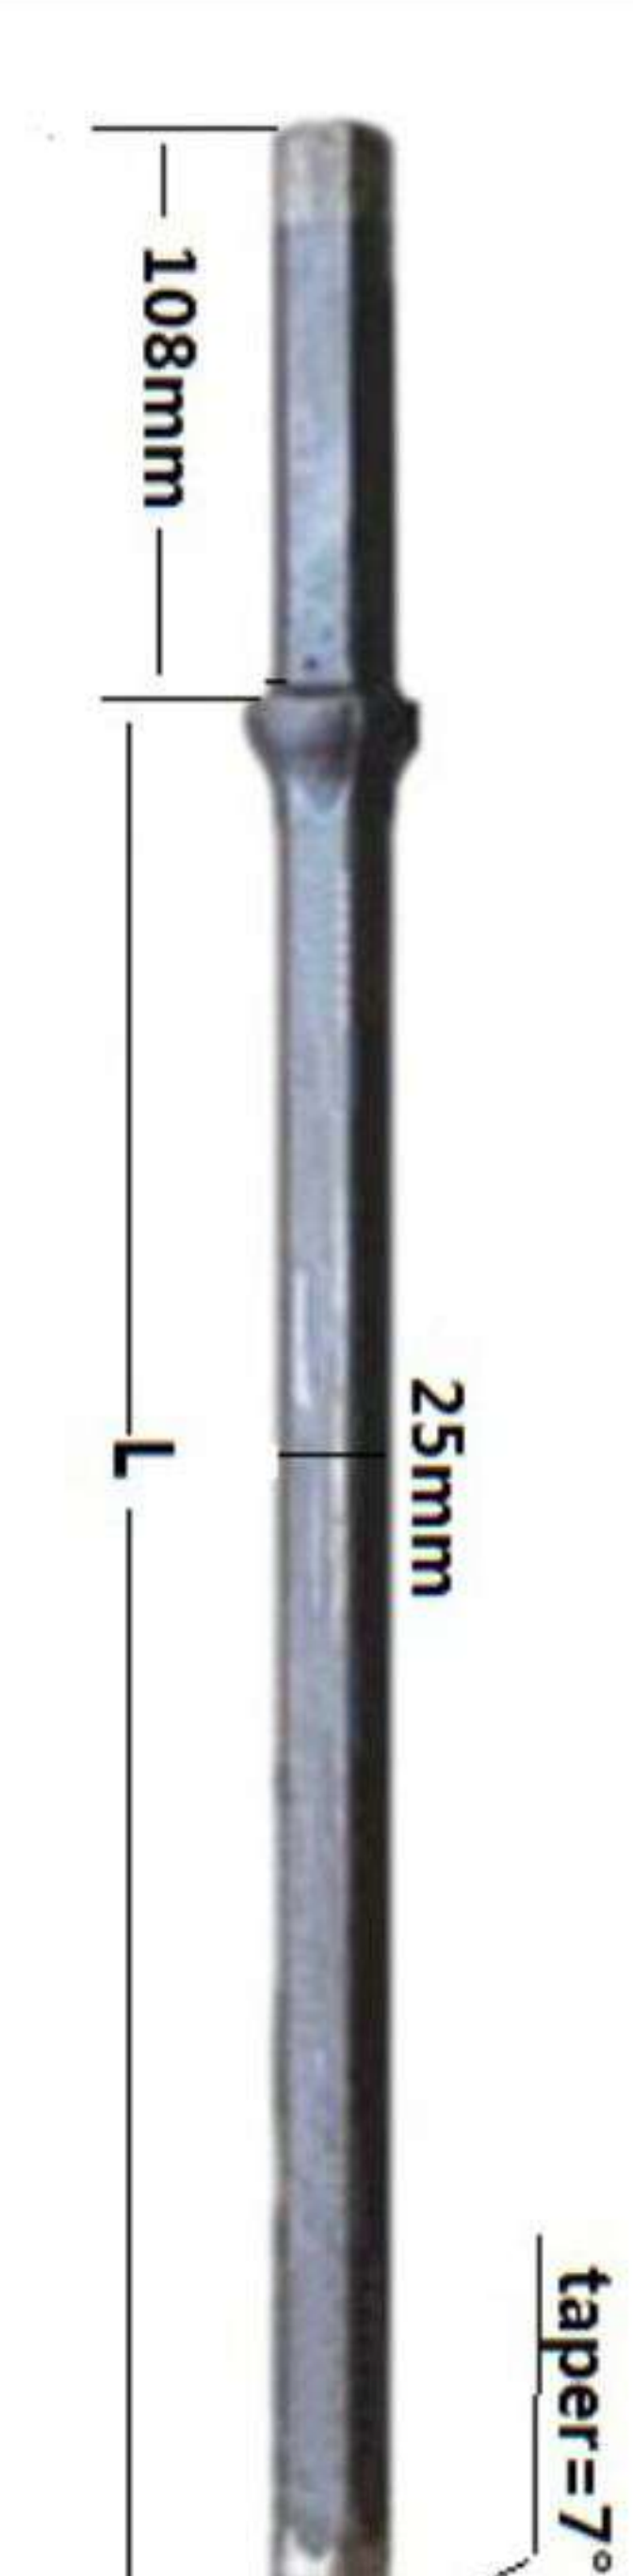

锥度钎杆 Tapered Drill Rod	长度 Length			柄部 Shank	锥度 taper	重量 weight (kg)	产品编号 Product NO.
	毫米 mm	英尺 foot	英寸 inch				
	600	2'	-	108x22	7° 11° 12°	1.8	KYH22-06-7
	800	2'	7 "	108x22		2.4	KYH22-08-7
	1000	3'	3 "	108x22		3.0	KYH22-10-7
	1200	3'	11 "	108x22		3.6	KYH22-12-7
	1400	4'	7 "	108x22		4.2	KYH22-14-7
	1600	5'	3 "	108x22		4.9	KYH22-16-7
	1800	5'	11 "	108x22		5.5	KYH22-18-7
	2000	6'	6 "	108x22		6.1	KYH22-20-7
	2200	7'	2 "	108x22		6.7	KYH22-22-7
	2400	7'	10 "	108x22		7.3	KYH22-24-7
	2600	8'	6 "	108x22		7.9	KYH22-26-7
	2800	9'	2 "	108x22		8.4	KYH22-28-7
	3000	9'	10 "	108x22		9.0	KYH22-30-7
	3600	11'	10 "	108x22		10.8	KYH22-36-7
	4000	13'	1 "	108x22		12.1	KYH22-40-7
	4200	14'	5 "	108x22		12.6	KYH22-42-7
	600	2'	-	108x25	7° 11° 12°	2.4	KYH25-06-7
	800	2'	7 "	108x25		3.2	KYH25-08-7
	1000	3'	3 "	108x25		4.0	KYH25-10-7
	1200	3'	11 "	108x25		4.8	KYH25-12-7
	1400	4'	7 "	108x25		5.6	KYH25-14-7
	1600	5'	3 "	108x25		6.4	KYH25-16-7
	1800	5'	11 "	108x25		7.2	KYH25-18-7
	2000	6'	6 "	108x25		8.0	KYH25-20-7
	2200	7'	2 "	108x25		8.8	KYH25-22-7
	2400	7'	10 "	108x25		9.6	KYH25-24-7
	2600	8'	6 "	108x25		10.4	KYH25-26-7
	2800	9'	2 "	108x25		11.2	KYH25-28-7
	3000	9'	10 "	108x25		12.0	KYH25-30-7
	3600	11'	10 "	108x25		14.4	KYH25-36-7
	4000	13'	1 "	108x25		16.0	KYH25-40-7
	4200	14'	5 "	108x25		16.8	KYH25-42-7

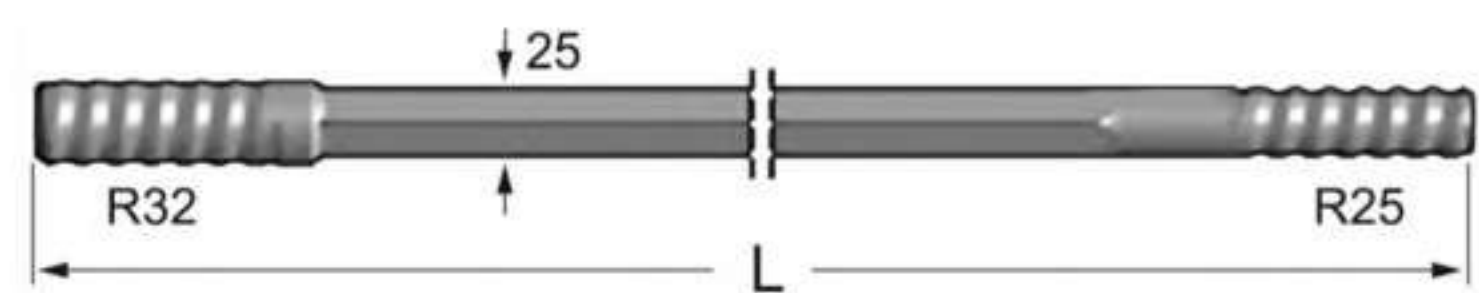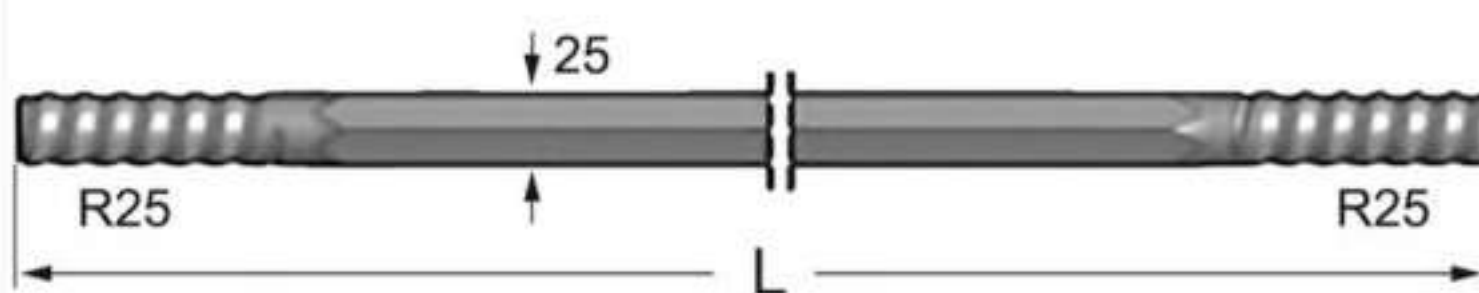
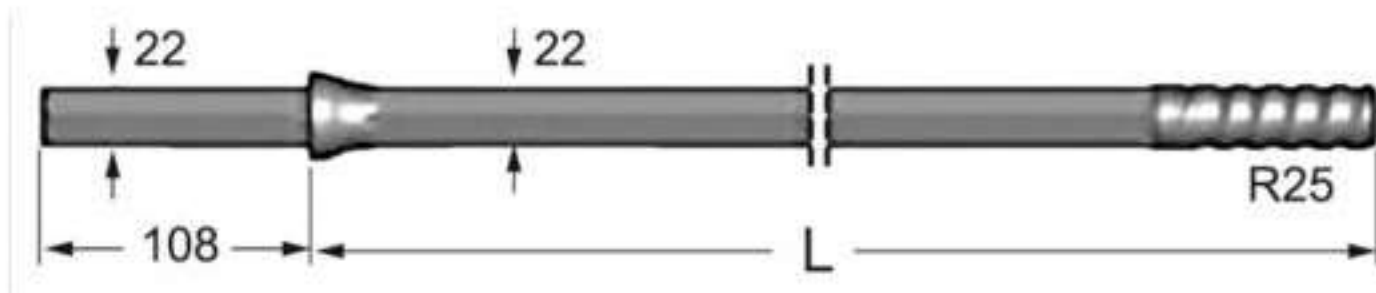
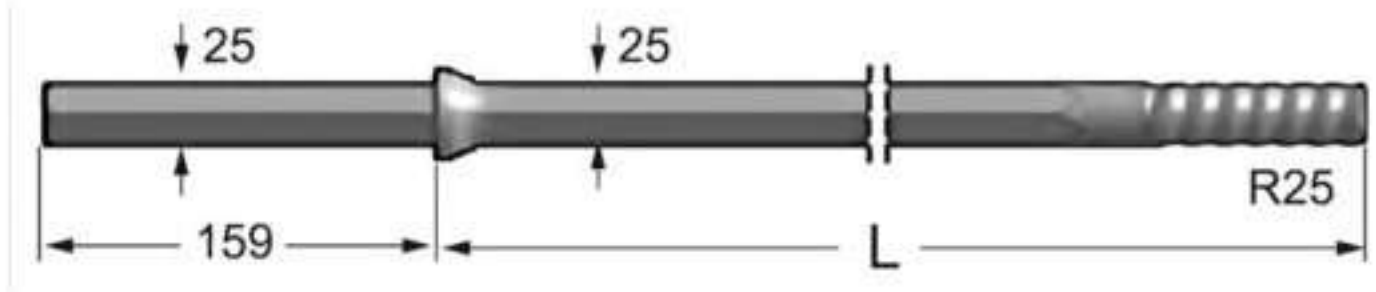
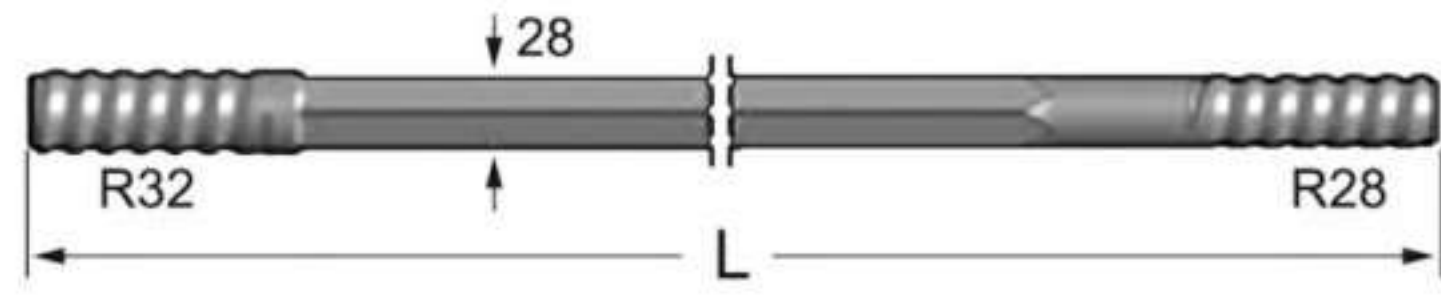



螺纹钎杆 Thread Drill Rod	长度 Length		外径 Diameter		重量 weight (kg)	产品编号 Product No.
	毫米 mm	英寸 inch	毫米 mm	英寸 inch		
H25 R25-R32 	2100	7'	25	1	8.6	KYH25-R25/R32-2100
	2400	8'	25	1	9.6	KYH25-R25/R32-2400
	2600	8'8 "	25	1	10.4	KYH25-R25/R32-2600
	2800	9'	25	1	11.1	KYH25-R25/R32-2800
	3090	10'	25	1	12.2	KYH25-R25/R32-3090
	3700	12'	25	1	14.6	KYH25-R25/R32-3700
H25 R25-R25 	915	3'	25	1	3.4	KYH25-R25/R25-0915
	1000	3'3 3/8 "	25	1	4.0	KYH25-R25/R25-1000
	1220	4'	25	1	4.6	KYH25-R25/R25-1220
	1525	5'	25	1	5.8	KYH25-R25/R25-1525
	1830	6'	25	1	7.0	KYH25-R25/R25-1830
	2435	8'	25	1	9.3	KYH25-R25/R25-2435
	3050	10'	25	1	12.0	KYH25-R25/R25-3050
H25 R25/35 	610	2'	25	1	2.7	KYH25-R25/35-0610
	1220	4'	25	1	5.1	KYH25-R25/35-1220
H22 R25/108  H25 R25/159 	钎尾 22mmx108mm Shank 22x108mm					
	610	2'	22	7/8	2.6	KYH22-R25/108-0610
	760	2'6 "	22	7/8	2.9	KYH22-R25/108-0760
	1000	3'3 "	22	7/8	3.7	KYH22-R25/108-1000
	1200	4'	22	7/8	4.4	KYH22-R25/108-1200
	1830	6'	22	7/8	6.3	KYH22-R25/108-1830
	2435	8'	22	7/8	8.1	KYH22-R25/108-2435
	3200	10'6 "	22	7/8	10.6	KYH22-R25/108-3200
	3600	12'	22	7/8	12.0	KYH22-R25/108-3600
	钎尾 25mmx159mm Shank 25x159mm					
	2700	8'10 "	25	1	11.3	KYH25-R25/159-2700
	3200	10'6 "	25	1	13.7	KYH25-R25/159-3200
H28 R32-R28 	2400	7'10 "	28	1 1/8	12.2	KYH28-R28/R32-2400
	2750	9'	28	1 1/8	14.4	KYH28-R28/R32-2750
	3700	12'1 1/2 "	28	1 1/8	18.9	KYH28-R28/R32-3700
	4000					KYH28-R28/R32-4000
	4310	14'1 1/2 "	28	1 1/8	22.0	KYH28-R28/R32-4310
	4920	16'1 1/2 "	28	1 1/8	25.3	KYH28-R28/R32-4920



钻杆 Drill Pipe	螺纹 ThreadPin/Box	长度 Length	直径 Diameter	壁厚 wall thickness(mm)	扳手槽 Wrench flats(mm)	产品编号 Product NO.
		毫米 mm	毫米 mm			
	F32X8	1000	45	4.5	32	KY-FB-01
	F42X10	1000	60	5.0	33	KY-FB-02
	F48X10	1000	60	5.0	34	KY-FB-03
	F48X10	2000	60	5.0	35	KY-FB-04
	F48X10	3000	60	5.0	36	KY-FB-05
	2 3/8" API REG	1000	76	6.0	57	KY-BZ-01
	2 3/8" API REG	1500	76	6.0	57	KY-BZ-02
	2 3/8" API REG	2000	76	6.0	57	KY-BZ-03
	2 3/8" API REG	3000	76	6.0	57	KY-BZ-04
	2 3/8" API REG	1000	76	6.0	65	KY-BZ-05
	2 3/8" API REG	1500	76	6.0	65	KY-BZ-06
	2 3/8" API REG	2000	76	6.0	65	KY-BZ-07
	2 3/8" API REG	3000	76	6.0	65	KY-BZ-08
	2 3/8" API REG	1000	89	5.5	65	KY-BZ-09
	2 3/8" API REG	1500	89	5.5	65	KY-BZ-10
	2 3/8" API REG	2000	89	5.5	65	KY-BZ-11
	2 3/8" API REG	3000	89	5.5	65	KY-BZ-12
	2 3/8" API REG	1000	89	6.5	65	KY-BZ-13
	2 3/8" API REG	1500	89	6.5	65	KY-BZ-14
	2 3/8" API REG	2000	89	6.5	65	KY-BZ-15
	2 3/8" API REG	3000	89	6.5	65	KY-BZ-16
	2 3/8" API REG	4500	89	6.5	65	KY-BZ-17
	2 3/8" API REG	6000	89	6.5	65	KY-BZ-18
	2 3/8" API REG	1000	102	6.5	75.0	KY-BZ-19
	2 3/8" API REG	1500	102	6.5	75.0	KY-BZ-20
	2 3/8" API REG	2000	102	6.5	75.0	KY-BZ-21
	2 3/8" API REG	3000	102	6.5	75.0	KY-BZ-22
	2 3/8" API REG	4500	102	6.5	75.0	KY-BZ-23
	2 3/8" API REG	6000	102	6.5	75.0	KY-BZ-24
	3 1/2" API REG	1000	114	6.5	95.0	KY-BZ-25
	3 1/2" API REG	1500	114	6.5	95.0	KY-BZ-26
	3 1/2" API REG	2000	114	6.5	95.0	KY-BZ-27
	3 1/2" API REG	3000	114	6.5	95.0	KY-BZ-28
	3 1/2" API REG	4500	114	6.5	95.0	KY-BZ-29
	3 1/2" API REG	6000	114	6.5	95.0	KY-BZ-30

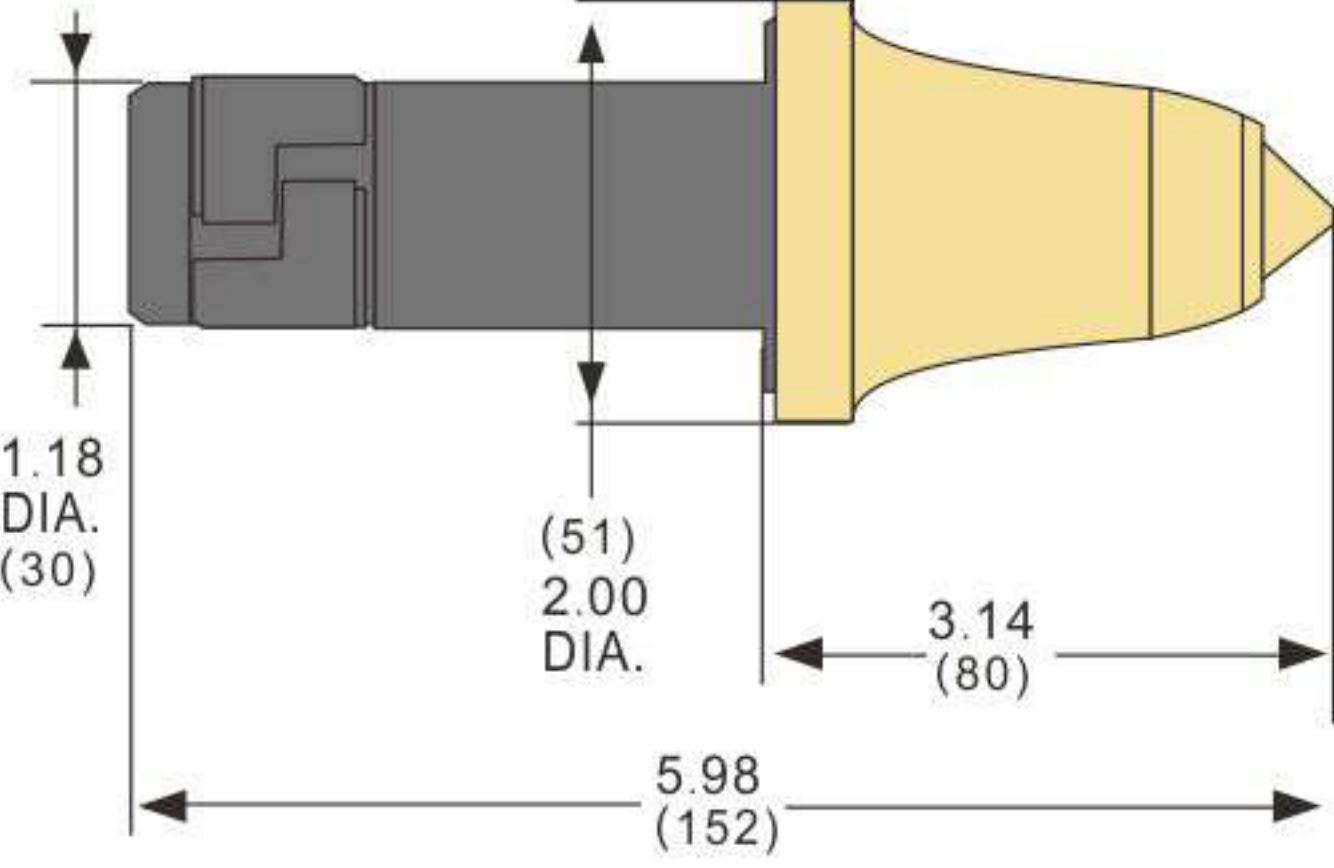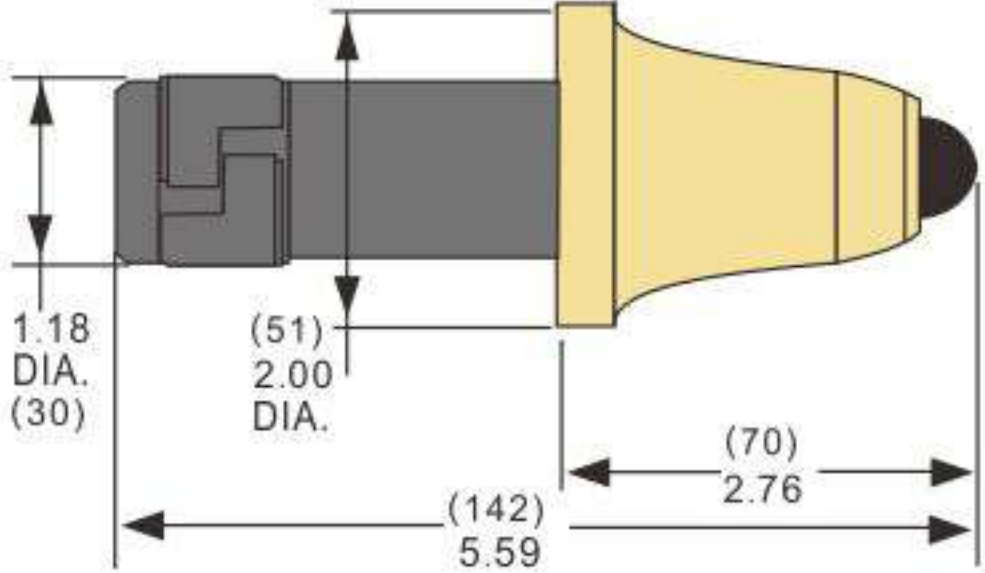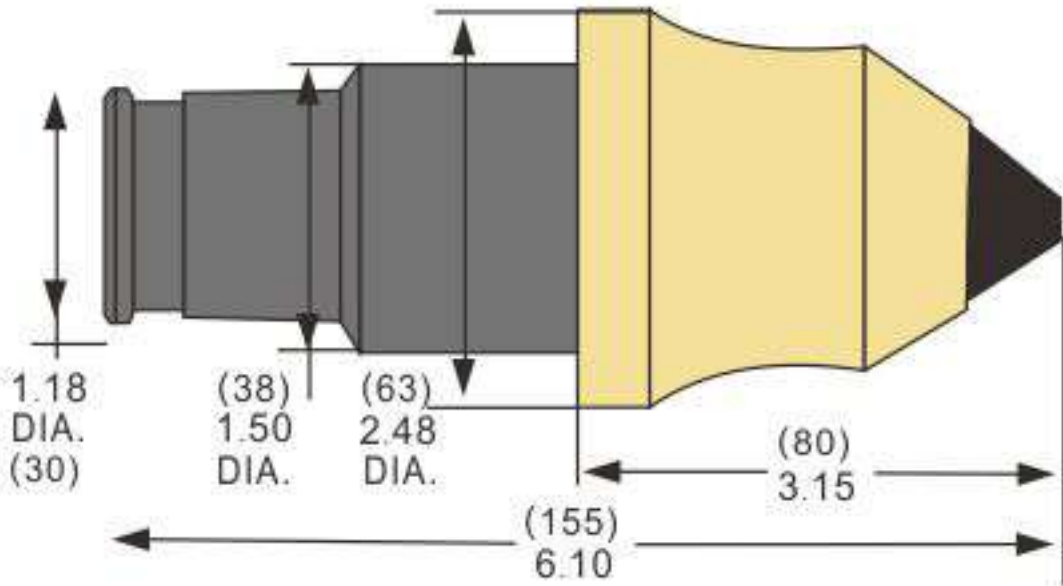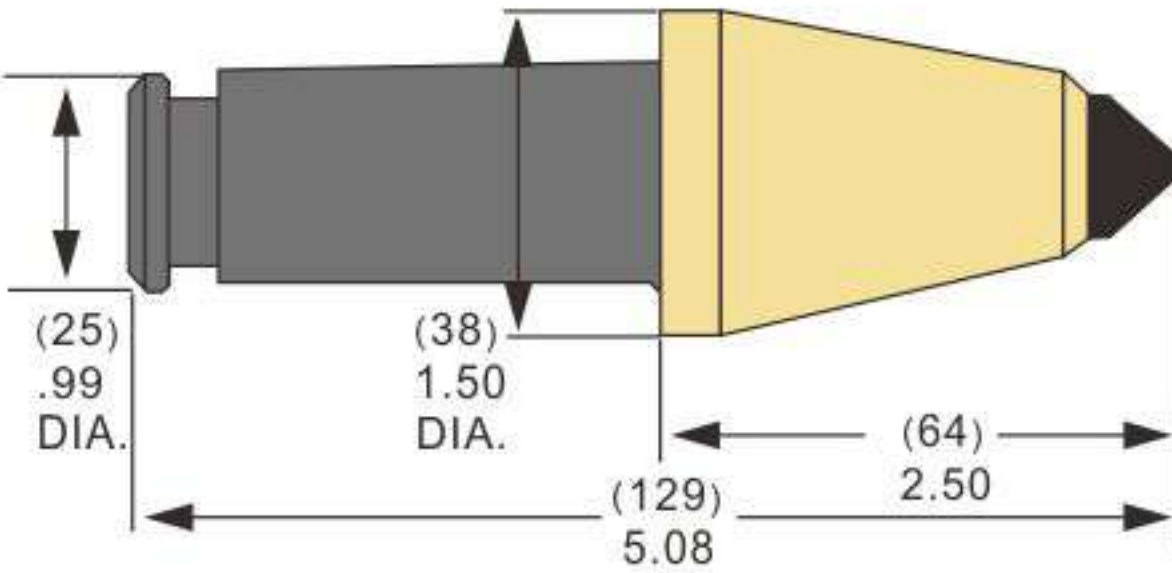

采煤机工具 Coal Cutter Bits Series	主要尺寸 Main Standard(mm)					产品编号 Product NO.
	L1	L2	L3	D	d	
采煤用镐形截齿 Coal cutter Pick-shaped Bits 	134	62.5	27.5	50	30	JGC62/30
	145	70	8	70	30	JGC70/30
	152	80	27.5	50	30	JGC80/30
	181	98	27.5	55	35	JGC98/35
	176	82.5	27.5	55	35	JGC82.5/35
	143	70	27.5	50	30	JGC70/30B
	152	80	27.5	50	30	JGC80/30B
	164	89	16.5	51	30	JGC89/30
	196	102	27.5	55	35	JGC102/35
	183	89	27.5	55	35	JGC89/35
	192	98	27.5	55	35	JGC98/35B
	128	62.5	6	44.6	25.2	JGQ62.5/25
	130	65	6	44.5	25.5	JGQ65/25
	139	75	6	53	34	JGQ75/34
	155	83	5	62	38	JGQ83/38
采煤用镐形截齿 Coal cutter Pick-shaped Bits 	149	77	27.5	50	30	JGC80/30
	183	89	27.5	55	35	JGC89/35
	192	98	27.5	55	35	JGC98/35
	130	65	6	44.6	25.2	JGQ65/25
	135.5	65	5.5	53	30	JGQ65/30A
	155	83	5	62	38	JGQ83/38
采煤用镐形截齿 Coal cutter Pick-shaped Bits 	223	102	28	62	35	JGQ102/43
	140	65	7.3	48	30	JGQ65/38
	140	65	8	48	30	JGQ65/38A
	150	75	7.3	48	30	JGQ75/38
	139	64	7.9	59.7	30	JGQ64/38
	143	68	8	52.5	30	JGQ68/38
采煤用镐形截齿 Coal cutter Pick-shaped Bits 	192	98	16.6	55	35	JGQ98/35

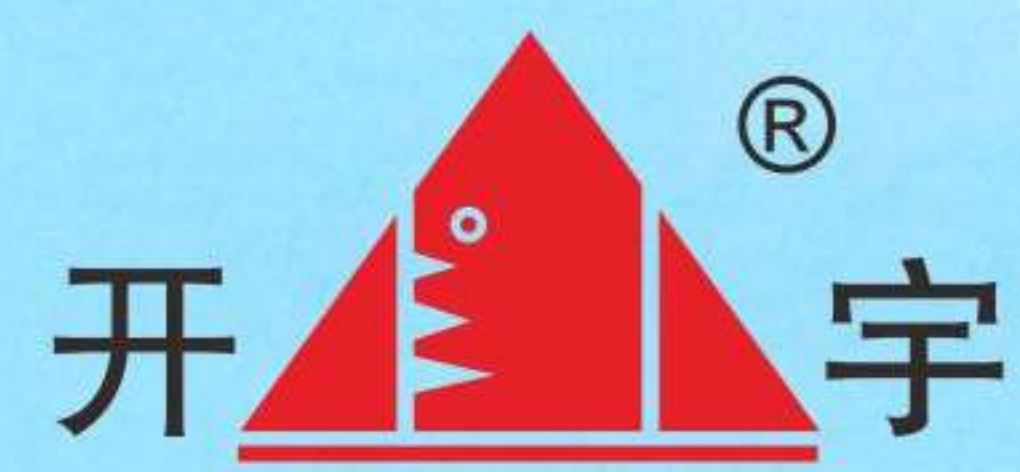


开宇系列钻头

KAIYU SERIES DRILL BITS



P 专业诚信 客户至上
rofessional integrity customer first

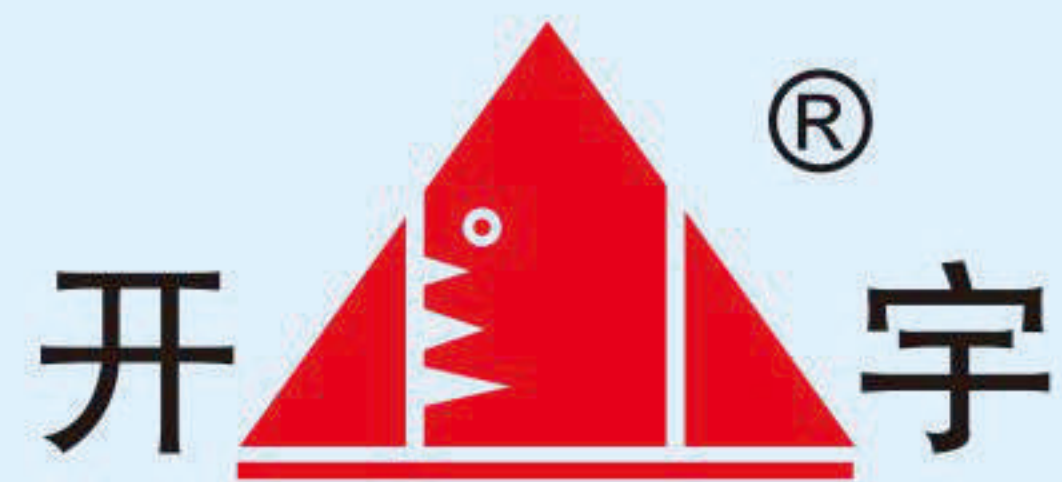

开宇（浙江）钎具有限公司

KAIYU (ZHEJIANG) DRILLING TOOLS CO., LTD

地址：浙江省台州市路桥区金清镇文昌西路334-358号

Add: No., 334-358 west Wenchang Road, Jinqing Town,
Luqiao District, Taizhou City, Zhejiang, China, 318058

Website: www.kydrill.com

https://button-bit.en.made-in-china.com

Email: info@kydrill.com kaiyu_bit@vip.163.com

Tel:0086-82885118 **Fax:**0086-576-82885122