



• Moulds

• NOBLELIFT • Parking

Meysher Industrial Group Ltd

Address : Rm.1008, No.9 Building, Lane 313, Ningguo Rd.,

Shanghai, China (Mainland) 200090

Mob : +8613816476992(WhatsApp)

Tel : +862165206329

Email : info@meysher.com

We Supply Pallets for Bricks



www.Meysher.com



Content

INTRODUCTION

MEYSHER G-FIBER PALLETS

MEYSHER PVC PALLETS

MEYSHER BAMBOO PALLETS

MEYSHER WOODEN PALLETS

PROJECTS REFERENCE



20 Years of Meysher Industrial

Meysher Group is an international company specializing in the research and development, production and sales of pallet for concrete products. The company has China's largest concrete block pallet production bases (close to Wuhan Qingdao, Shanghai, Ningbo seaport) and is also No. One pallets exporter in China since 2005. By the end of 2024, Meysher pallets has been exported and delivered to over 100 countries and areas. In 2015, the company invested in the intelligent parking equipments division of the listed company Noblilift Group. And In 2023, Meysher and Flex, a well-known German-funded mould company, reached a strategic partnership.



On many years of success and our position as the world market leader is down to one thing: the people behind Meysher. As a family business with a long-term approach, our top priority is not the shareholder value, as it is for so many companies, but the success of our customers. More than 500 staff and many offices / agents on every continent in the world work very hard to guarantee this with many years of experience and comprehensive expertise.

Email: info@meysher.com

MEYSHER
Brick Pallet Specialist



MEYSHER G-FIBER PALLETS

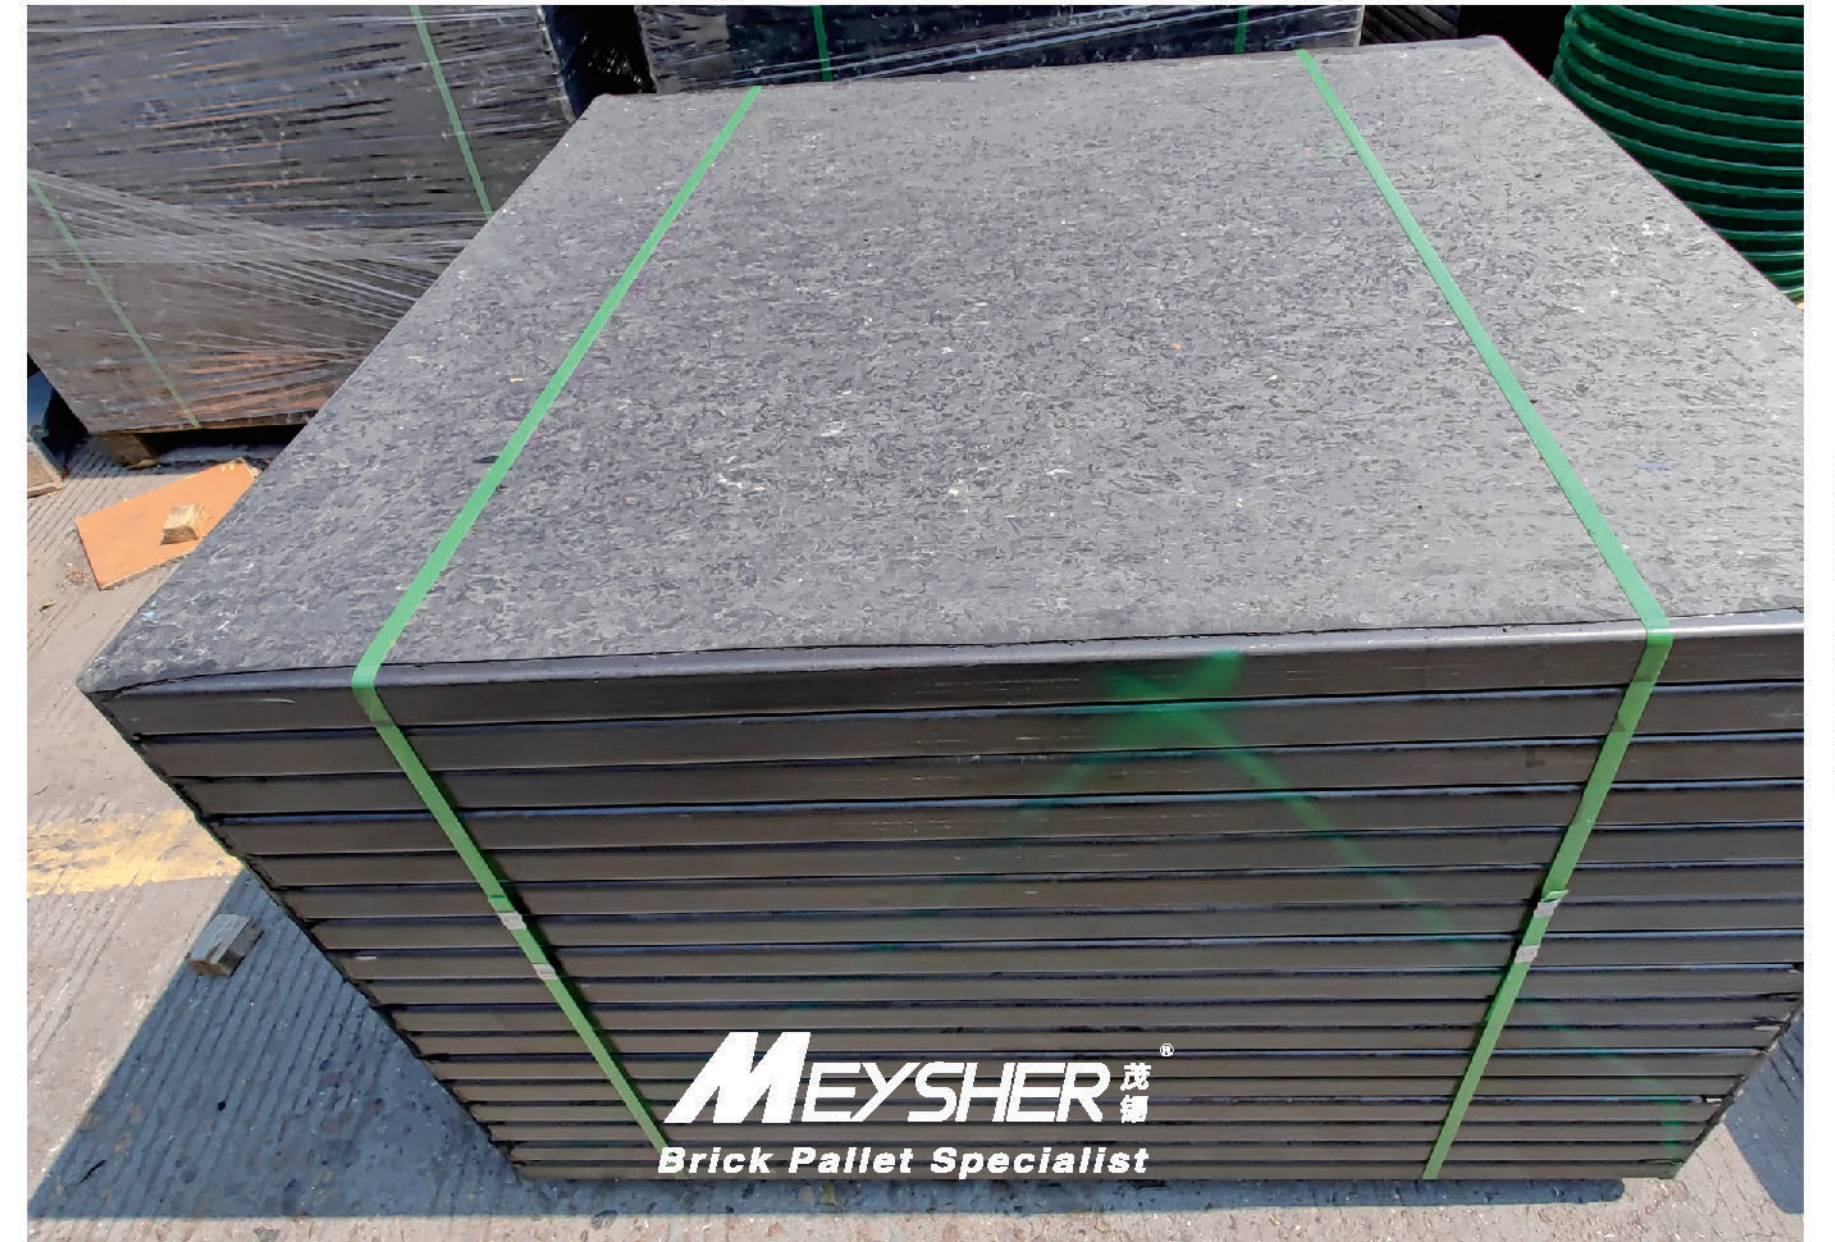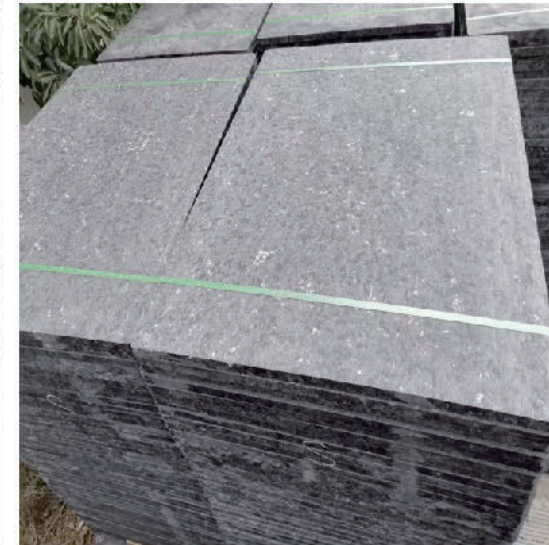


WhatsApp : +8613816476992

WhatsApp : +8613816476992


MEYSHER G-FIBER PALLETS

■ The MEYSHER G-Fiber Pallet is made from the new type of GMT aerospace and automobile industry materials. Top class glass fiber material , scientific design and advanced molding technology has made pallets performing outstanding characteristics. It effectively solves the problems caused by some other material pallets, like the rust and heavy problems of steel, warping and brittle problems of plastics, and crack and abrasive wear problems of woods and bamboos. And also it meets the 10 requirements as a pallet showing below.

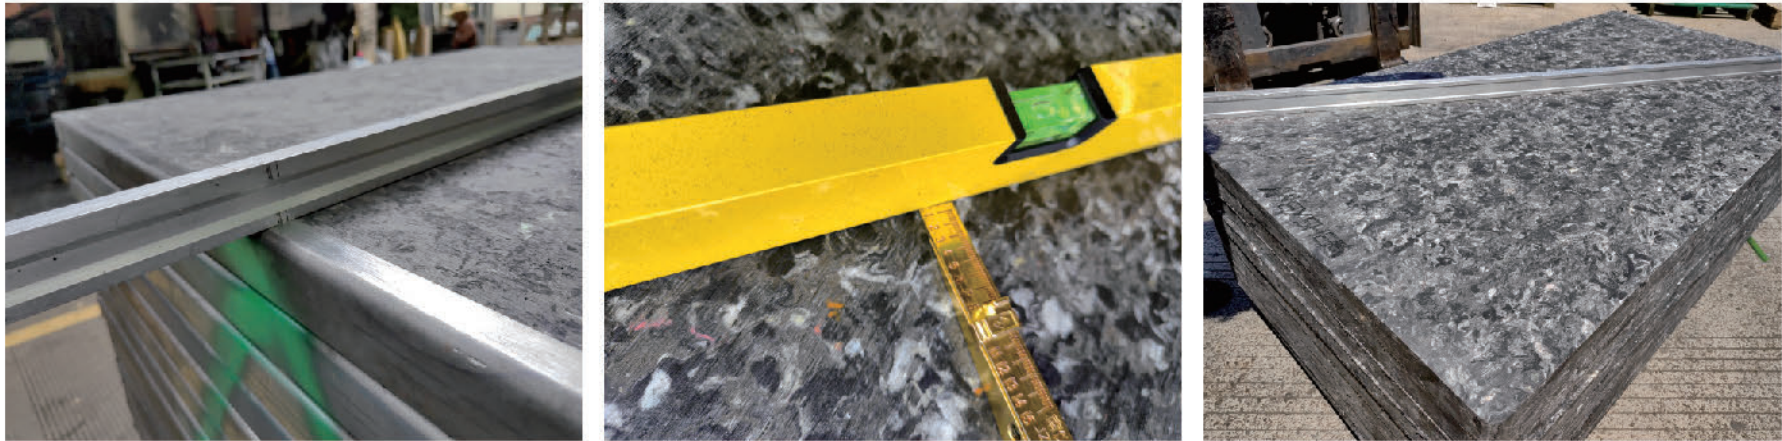


Items	Characteristics	Technical Indicator	Outstanding Performance	Comparing with other Materials Pallet
1	Rigidity	Elasticity Modulus 3.7GPa	No Deformation	More Rigid than same thickness solid wood pallet
2	High Load Bearing	Max load 2.0kn, Bending Strength 51.0MPa	Stand big pressure, high load, and brings no rupture	Higher Load Bearing than same thickness PVC and solid wood Pallet
3	Anti-abrasion	Shore Hardness 72	Long Life Span	Better Performance than plywood and bamboo wood Pallet
4	Anti-impact	Withstand Impact of 20KJ/m2	Vibration Resistant, Anti-fall, and no Cracking	Better Performance than plywood and solid wood Pallet
5	Weather Resistant	Operating Temperature between -40℃--90℃	Insulation Resistant, Anti-aging, and Suit for Steam Curing	Better Performance than PVC, steel and bamboo wood Pallet
6	Erosion Resistant	Resistance of most Acid, Alkali, and Salt	Protect inner steel and bamboo against rust and mildew	Better Performance than bamboo wood and steel Pallet
7	No Water Immersion	Water Immersion Rate <0.5%	Protect inner bamboo (wood) board	Better Performance than bamboo wood Pallet
8	Light Weight	Density <1.2	Effort Saving and Friction Reducing	Lighter than PVC and Steel Pallet
9	Life Span	Life Span can reach 8-10 years theoretically	Low Cost	Better Performance than PVC and bamboo wood Pallet
10	High Performance	High Performance and Low Cost	Extremely Low Cost during long time using	Better than all other material pallet
Above technical indicators refer to the overall performance of pallets, different specifications and structures may be a little different.				


WhatsApp : +8613816476992

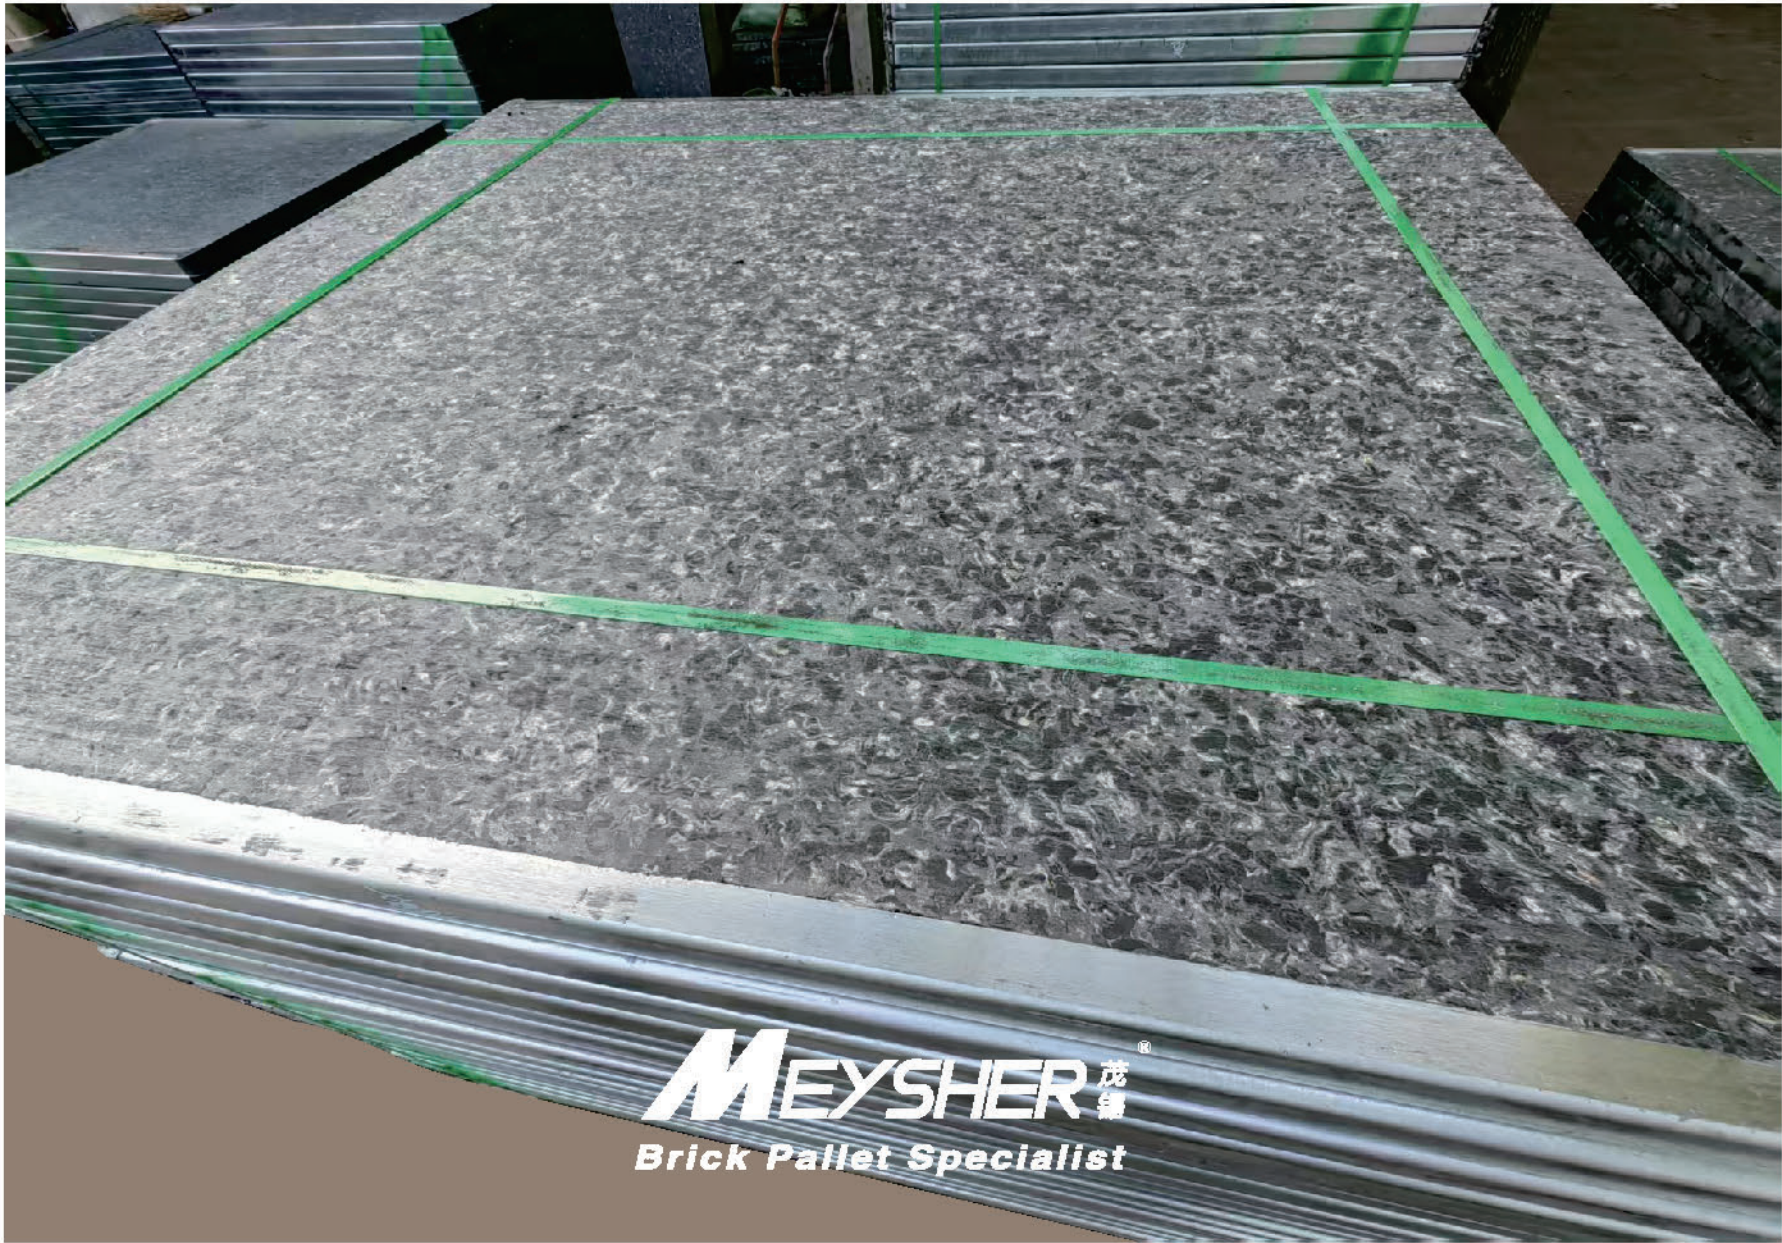


WhatsApp : +8613816476992

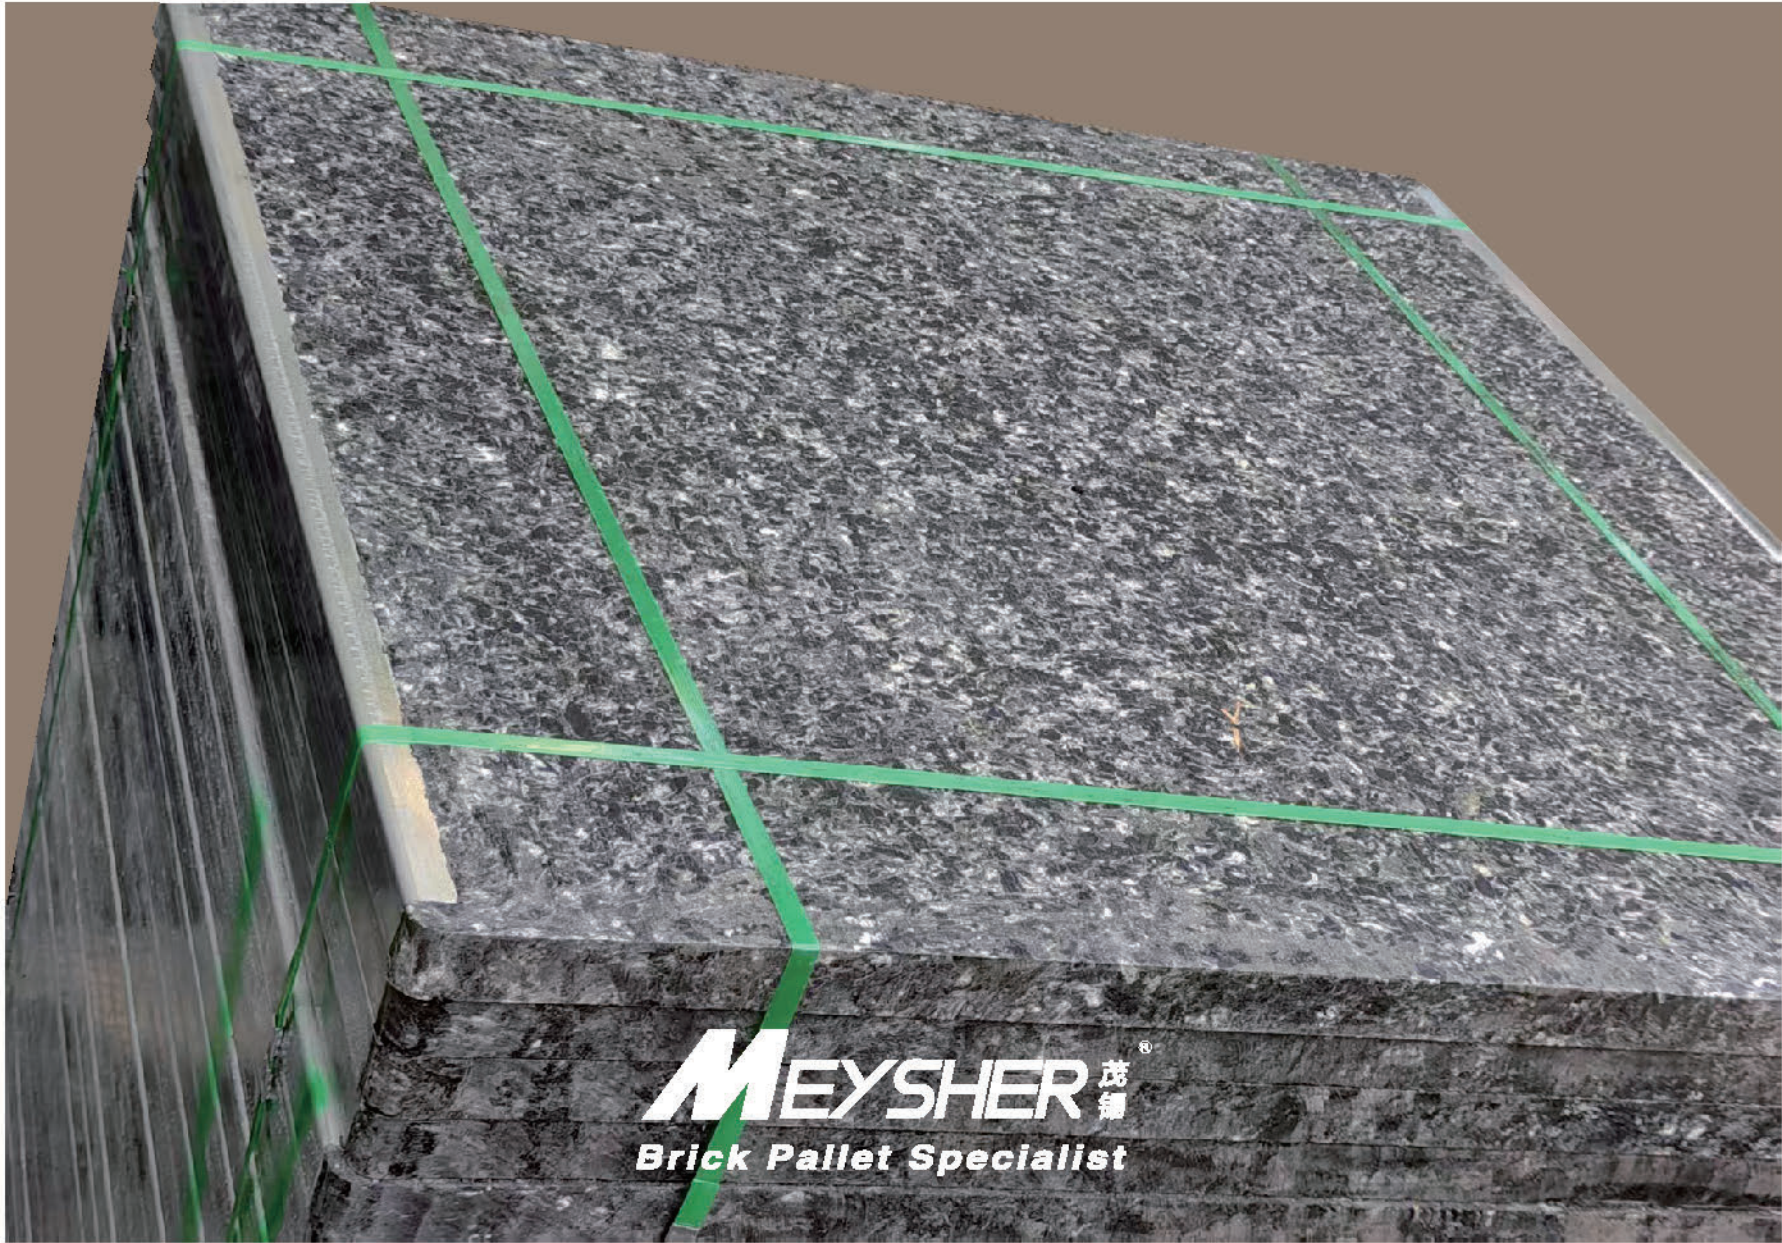

WhatsApp : +8613816476992

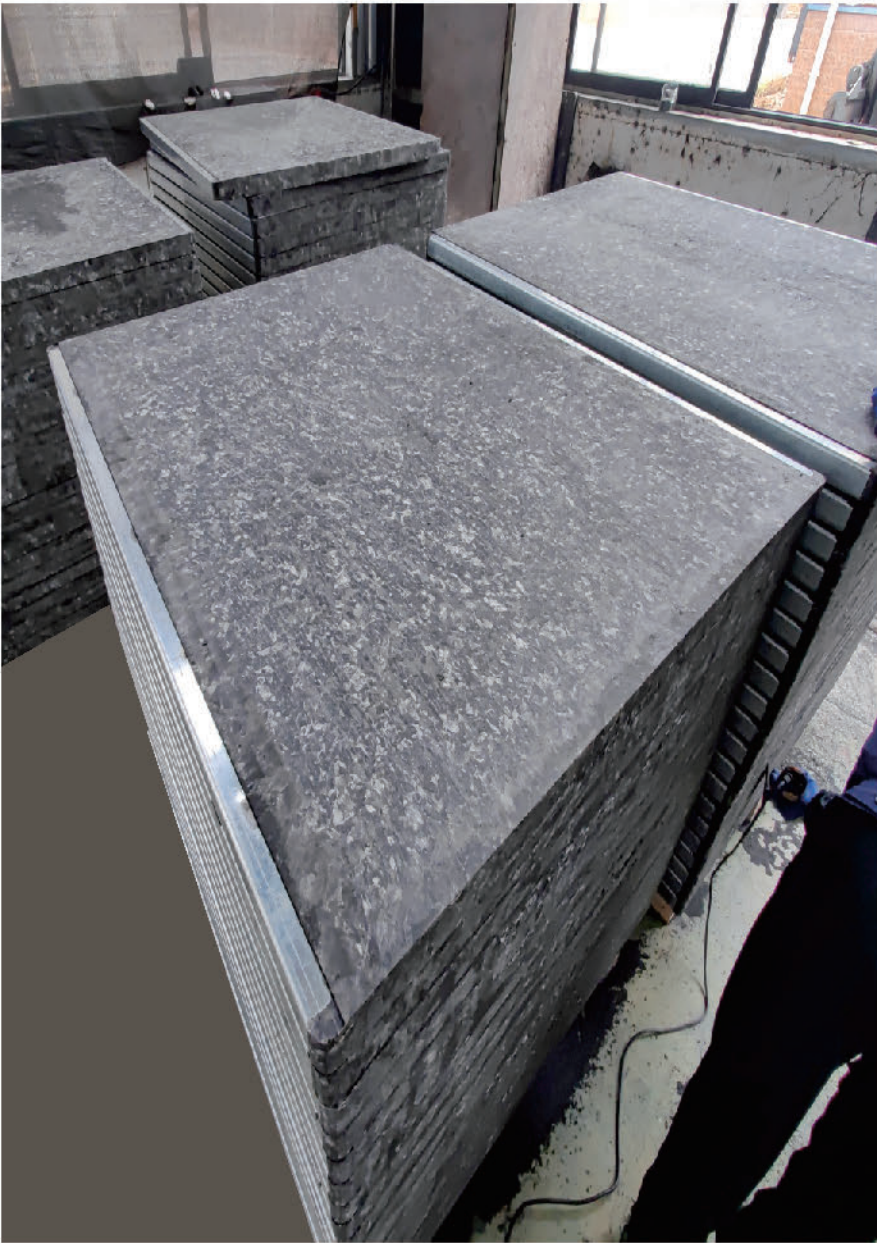


WhatsApp : +8613816476992

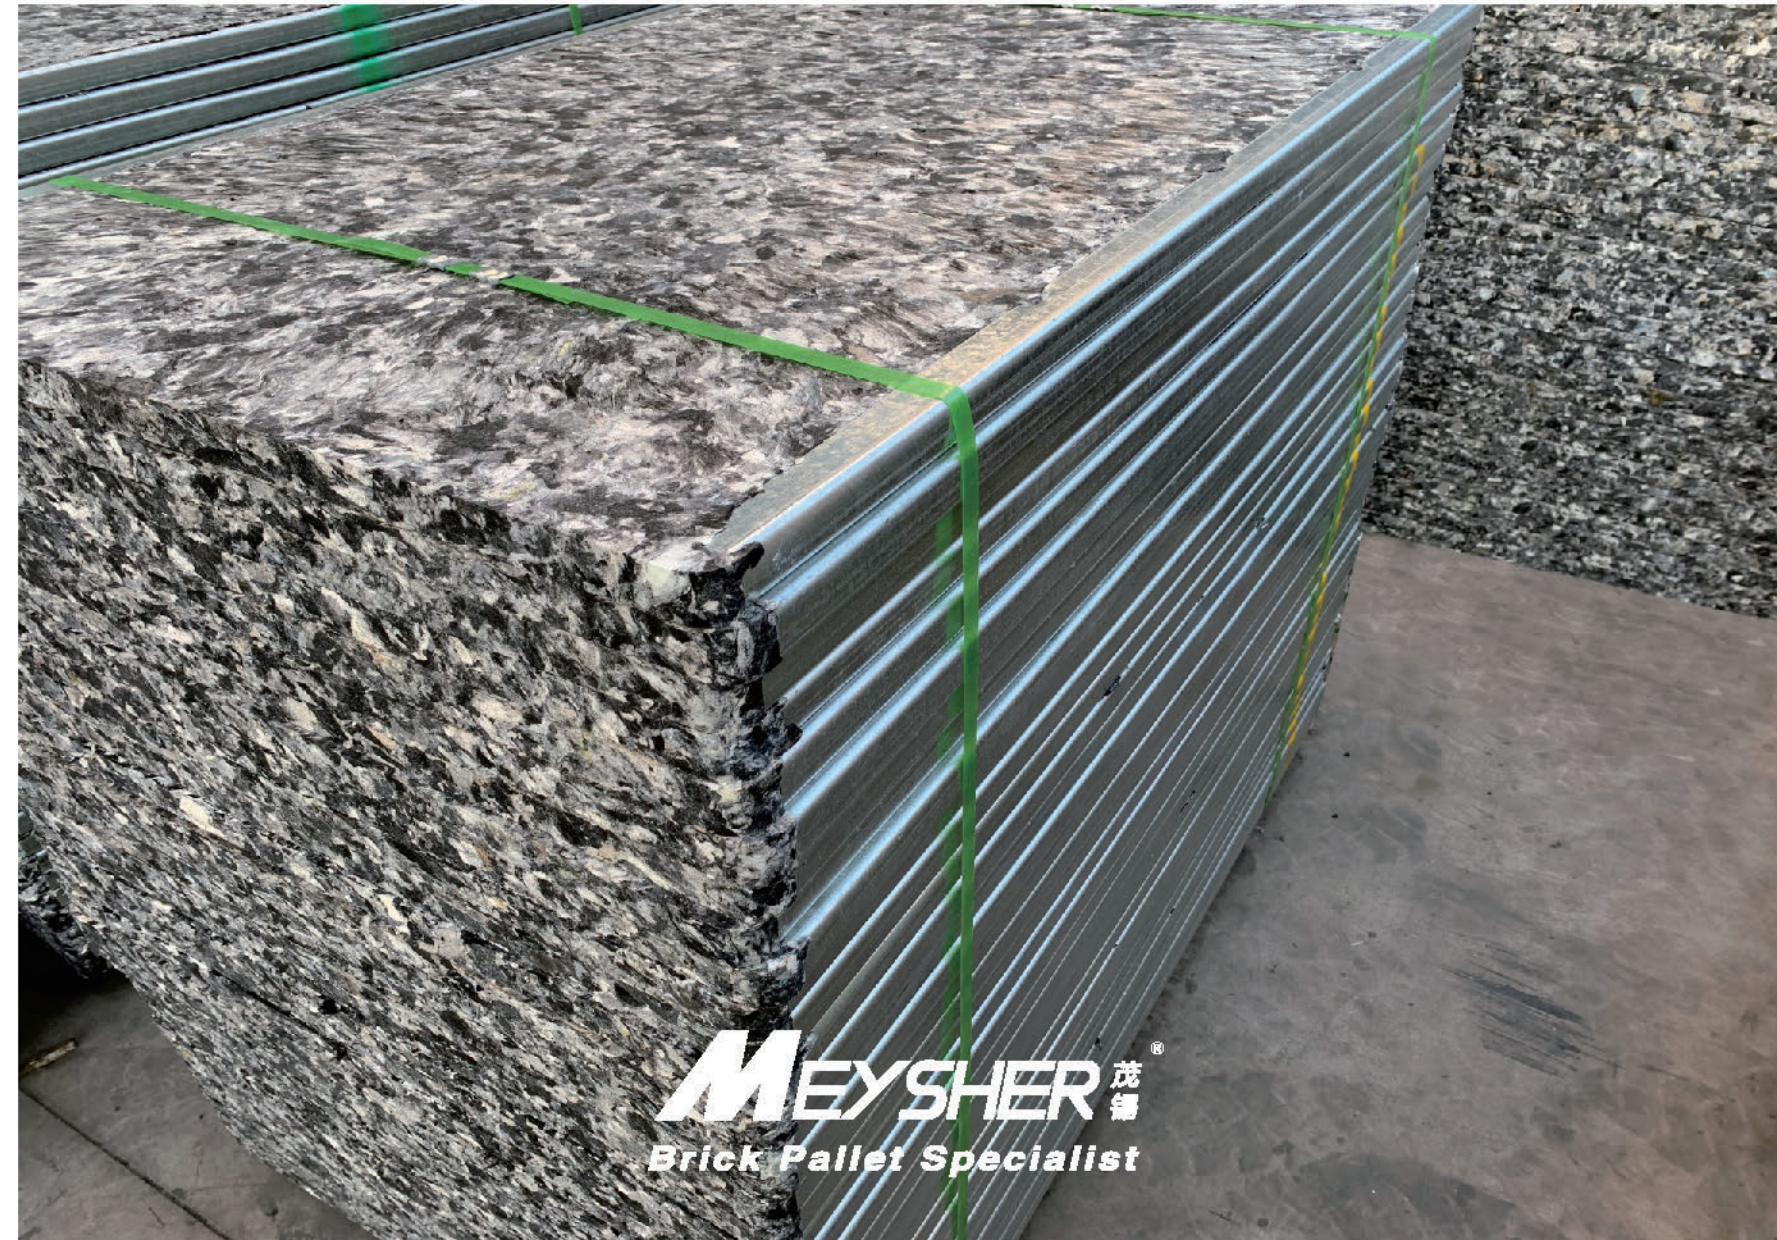



MEYSHER 茂
Brick Pallet Specialist



MEYSHER 茂
Brick Pallet Specialist

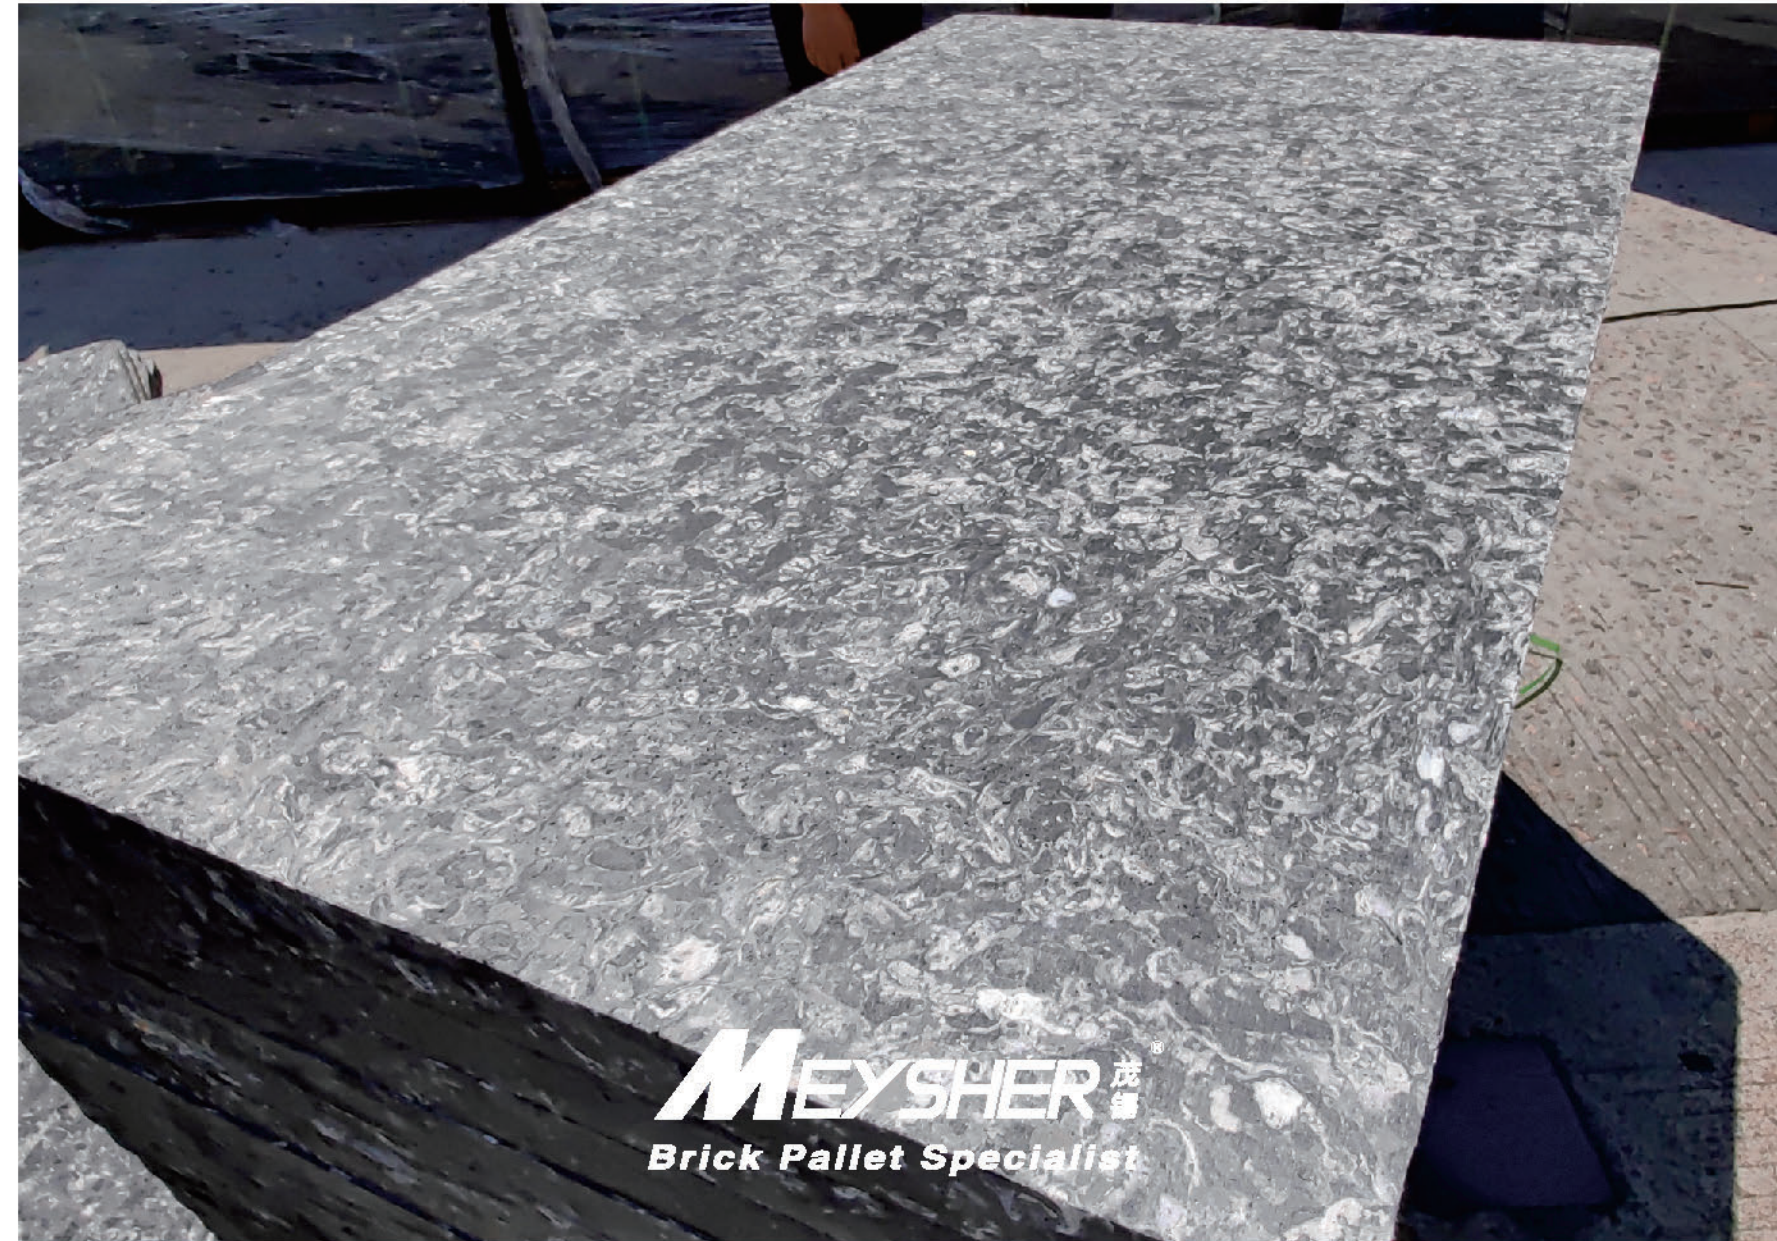


WhatsApp : +8613816476992

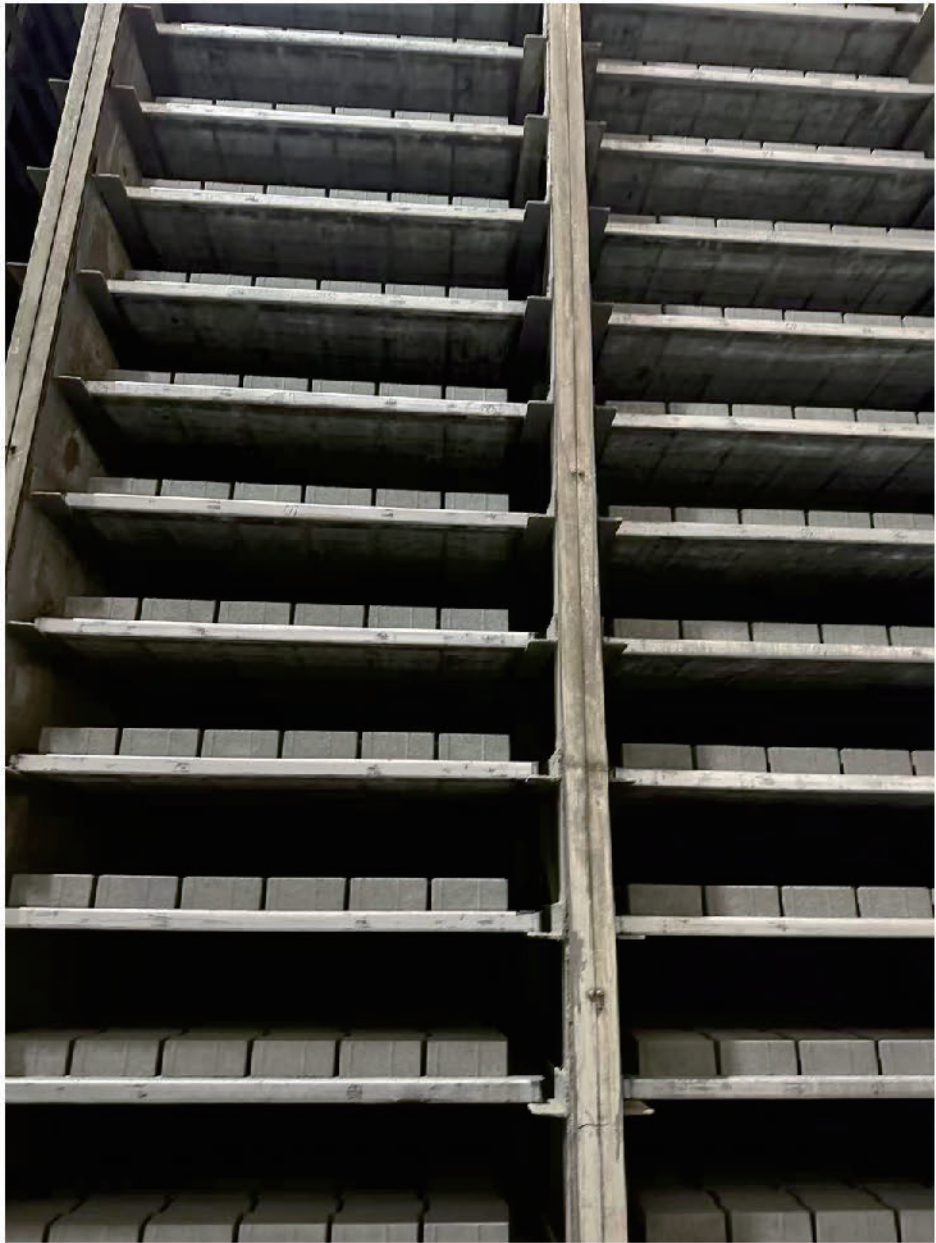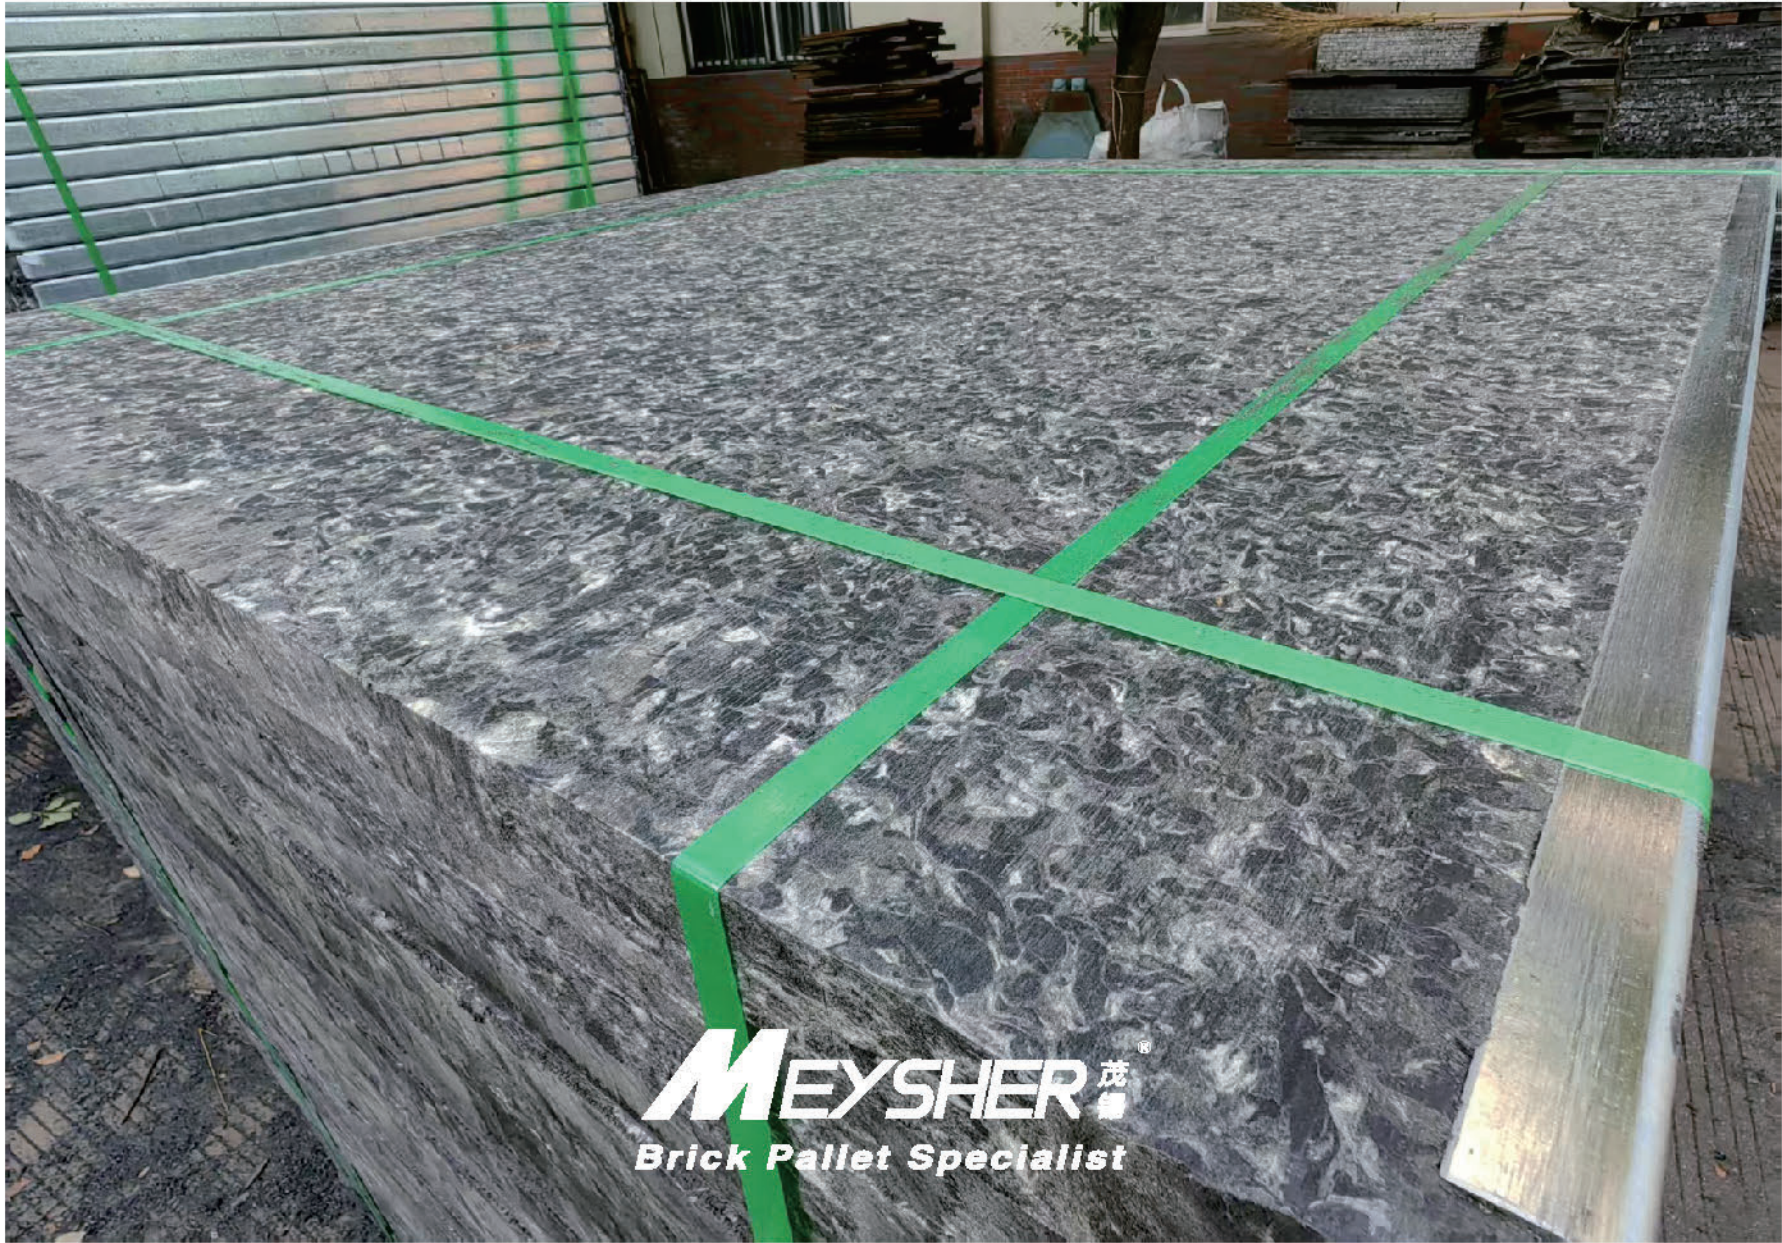

WhatsApp : +8613816476992

WhatsApp : +8613816476992

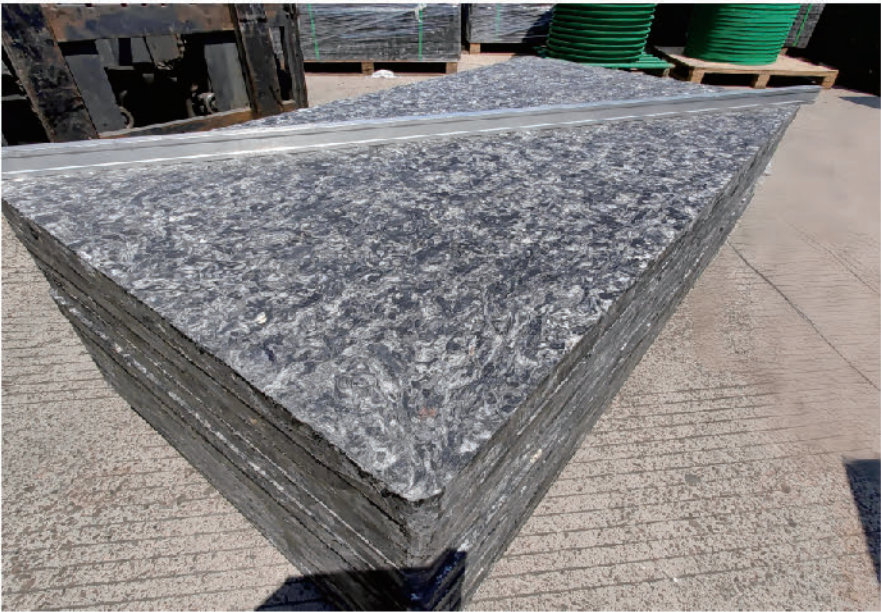


WhatsApp : +8613816476992

MEYSHER PVC PALLETS

Characteristics and Applications:Pure PVC pallet is specifically designed for brick moulding machine,the main material is PVC plastic,aded variety of reinforcement,Intergrate by high temperature and high pressure,will never open,nor crack,nonabsorbent,no deformation,impact resistance,high temperature resistant,service life over 6 years.

Product physical and mechanical properties:	
Item	Specifications
Density	1.70-1.80g/cm³
Bending Strength	more than 60 N/mm²
Flexural Modulus	more than 4.5 × 10³Mpa
Impact Strength	more than 60 KJ/m²
Absorption	less than 0.5%
N/mm²	more than 40
Temperature tolerance	110 °C
Surface wear	less than 0.04g/100r
Agling	More than 6 years
Width	At customer's request
Thickness	10-35mm
Length	At customer's request
Colour	Normally gray

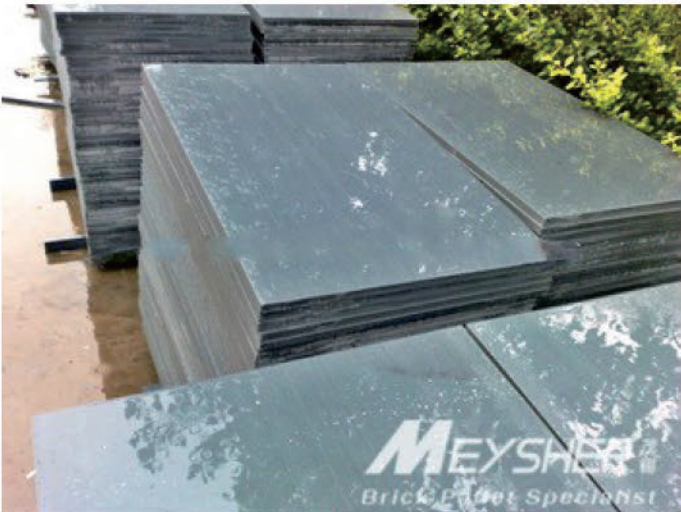

MEYSHER BAMBOO PALLETS

Durable for the finest bamboo raw materials with phenolic glue and widely used in brick plants all over the world. Suitable for concrete block, hollow brick, pavers, curbstones & interlocking products. No bending, no cracks.

It has characteristics of impact resistance, corrosion resistance, water resistant, acid and alkali resistance, non-deformation, long reuse cycle and so on. It can be used regularly in the temperature from -50° C to +80° C, without cracking and degumming.

TECH DATA	
Item	Specifications
Density	(0.88-0.98)g/cm³
Moisture Content	≤ 9%
Bend Resistant Strength	≥ 168 MPa
Bend Resistant Elasticity Coefficient	≥ 9100 MPa
Impact Intensity	≥ 232.5 KJ/m²
High Temperature Resistant	[(120±3) °C, In 24h] No Cracks





MEYSHER STEEL PALLET

WhatsApp : +8613816476992

Raw Material : Q355B steel produced from Baosteel
(Fortune Global 500)
Deflection of steel pallet : $\theta=PL/PE$
Modulus elasticity of material: steel (2,120,000 kg/cm3)
Anti-rust treatment (Manganese)

Cutting	Power balanced CNC gas cutting
Tolerance	Length and Width $\pm 1.0\text{mm}$, Diagonal $\pm 2.0\text{mm}$
Four corners	14mm radius ($\pm 3R$)
Sharp edges	smooth treatment in all corners and corners
Flatness	Within 1.0mm/ 1000.0mm in any direction
	Vibration Transmittability is proportional to
	Modulus of elasticity of the material and
	contact area.

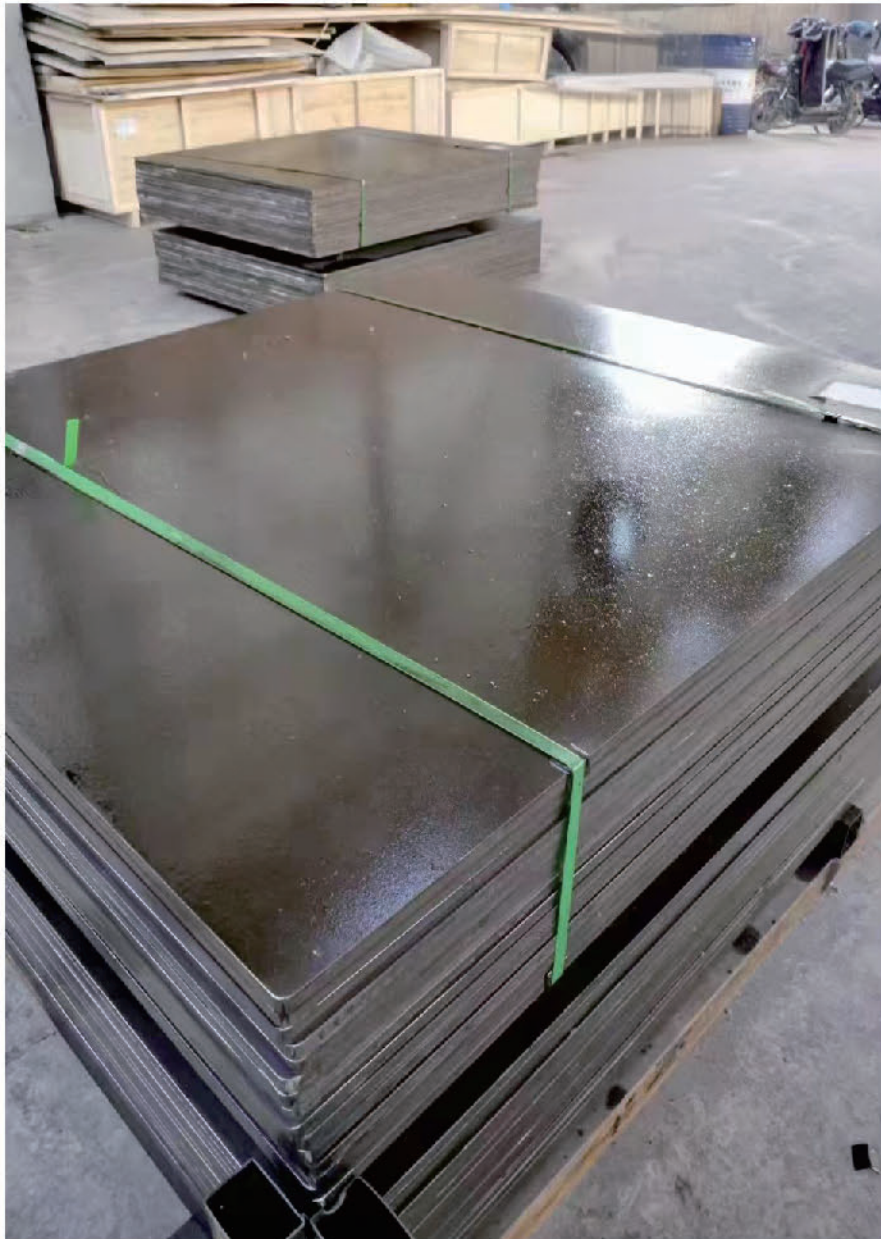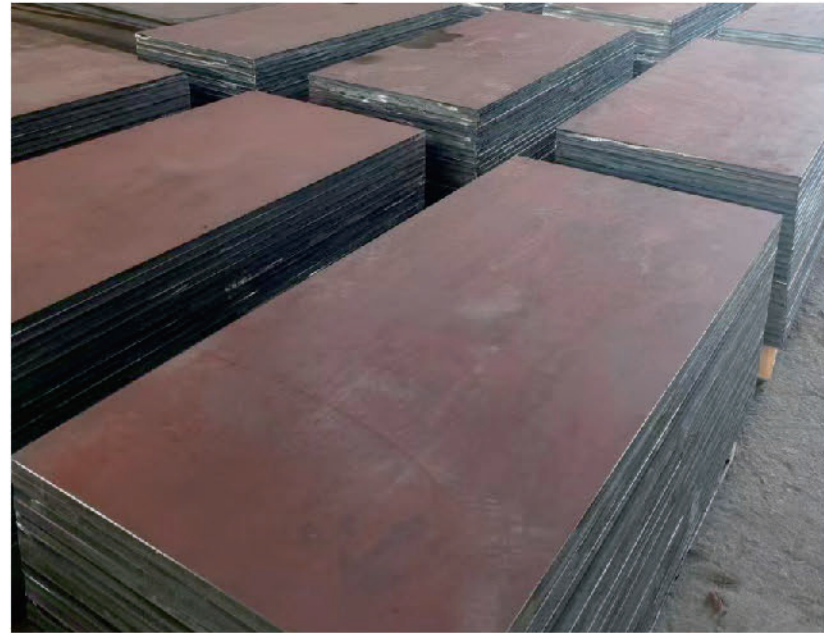

WhatsApp : +8613816476992

PROJECTS REFERENCE

WhatsApp : +8613816476992



WhatsApp : +8613816476992

MEYSHER WOODEN PALLETS

Solid Wooden Pallet

Density : 0.65–0.70 kg/m³

Moisture Content : 12% –14%.

Life span : over 8 years for non-steaming condition (below 60 degree) ; over 5 years for steaming condition (below 90 degree)

Temperature Duration : below 135 degree. Suitable steaming temperature is 65 –90 degree.



Raw material : Pure finest Russian Larch

Oil immersion treatment, double drying treatment , special concave convex groove jointing , C profile edge between steel and wood
40mm thickness bending no more than 1mm for 500 kg max loading .

Maintenance : Each 30–45 days for oil immersion treatment



WhatsApp : +8613816476992

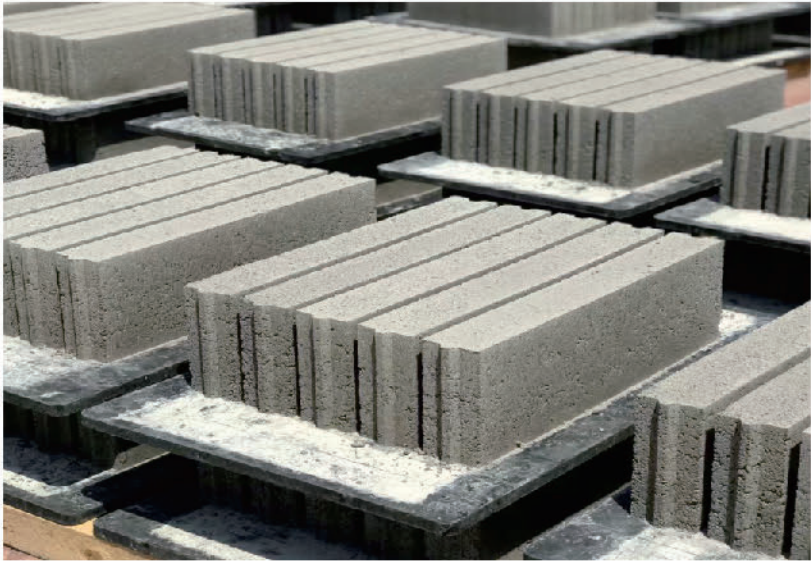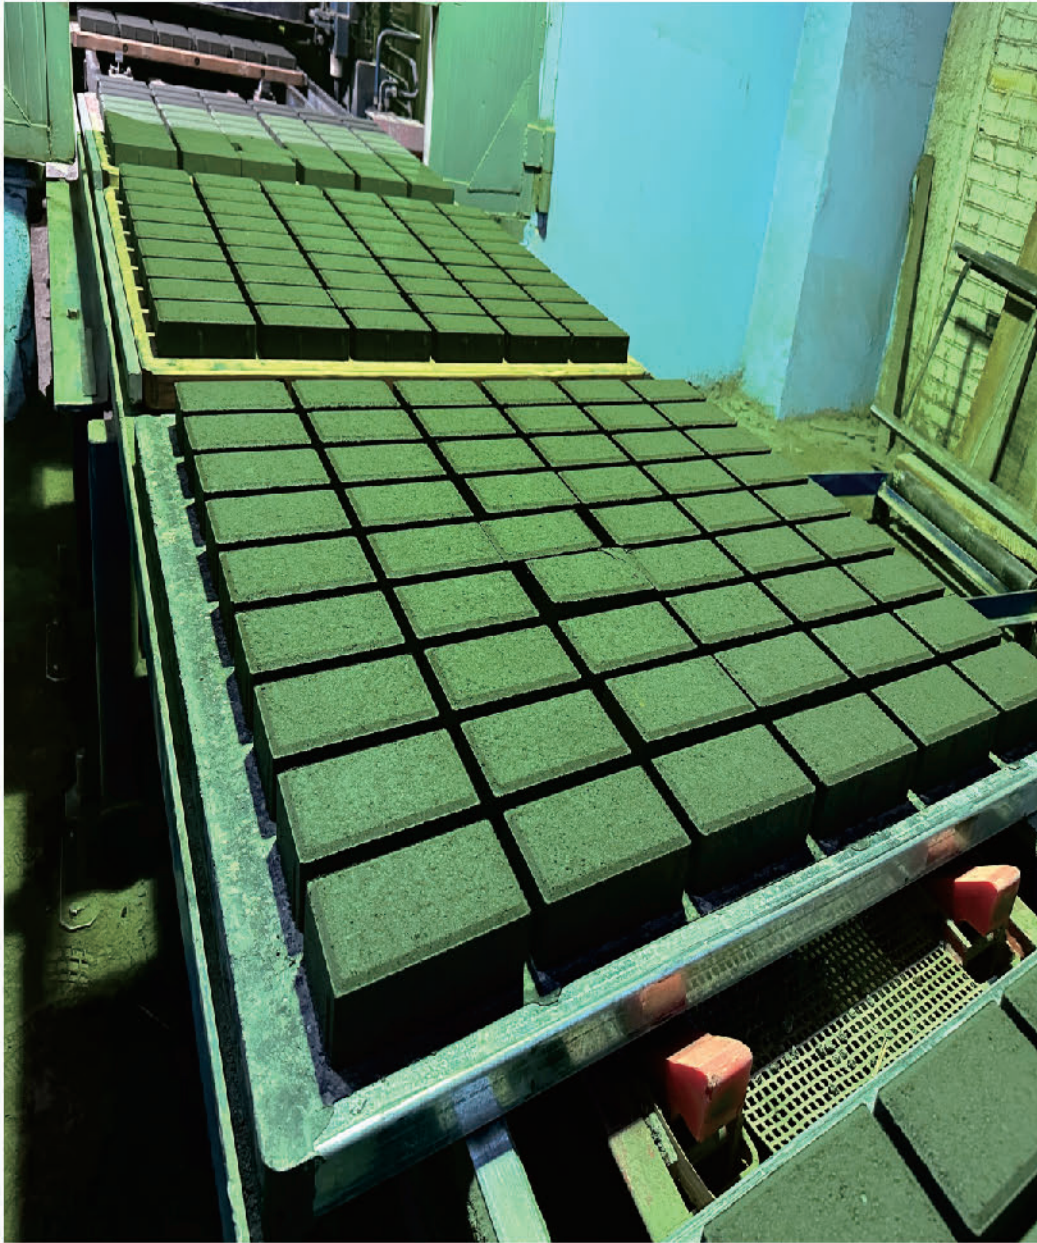

WhatsApp : +8613816476992