



HM 400



HM 465 | HM 495




HM 660 i | HM 665 |
HM 1200

技术参数	HM 465	HM 495	HM 660 i	HM 665	HM 1200
扣压力 (kN/Ton)	4,800/480	6,000/600	8,000/800	6,000/600	12,000/1,200
SAE R15/4SH 一体式	3"	3"	3"	3"	3"
SAE R15/4SH 分体式	3"	3"	3"	3"	3"
工业管	8"/12"***	8"/12"***	10"	12"/16"***	10"
主模具长度 (mm)	150	150	200	250	200
最大扣压范围 (mm) / 开口	310/+150	310/+150	325/+120	450/+180	325/+120
模具系列	239-xx/237L/245	239-xx/237L/245	239-xx/237L/246	239-xx/237L/298	239-xx/237L/246

*** 适用于带有特殊模具的管件。

免润滑	★ ★ ★
低维护	★ ★ ★
紧凑	★ ★
重量轻	★
可访问性	★ ★ ★
耐污垢度	★ ★ ★
持续性	★ ★ ★
价格	★ ★ ★
适应性	连续运行

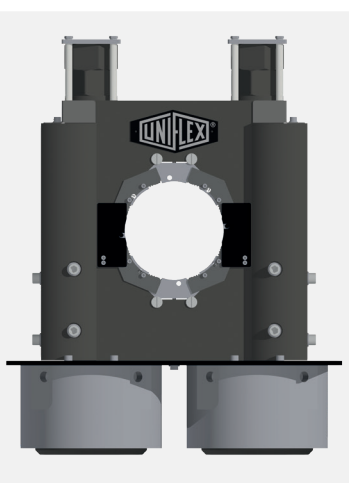

符合人体工程学的可操作性



这些机器非常紧凑和狭窄，可以创造更好的工作环境。

