HAITUI 海推

HD48H

480 马力全液压推土机

480 HP Hydrostatic bulldozer



产品特点：Main Features

- 搭载潍柴 WP17T 发动机，动力强劲，经久耐用。
  Equipped with WEICHAI WP17T engine, delivering powerful performance and long-lasting durability.
- 配备进口液压传动系统，传动效率高
  Equipped with imported hydrostatic transmission, delivering high driving efficiency.
- 与传统动力换挡推土机相比，全液压系统的终传动具有更高的可靠传动性
  Compared with traditional power-shift bulldozers, the final drive of the Hydrostatic system has higher reliable transmission performance.
- 静液压驱动控制系统，自动适应负载变化，稳定发动机功率输出，在任何工作条件下均能保持高效的传动。
  The hydrostatic drive control system automatically adapts to load changes, stabilizing engine power output and maintaining efficient transmission under any working condition.
- K 型浮动行走系统有助于在崎岖地面条件下保持驱动力并减少机器的振动。
  The K-type floating walking system helps maintain driving force on rough terrain and reduces machine vibration.
- 驾驶室可以向后翻转，以便于内部管道和关键液压部件的维护。
  The driver's cab can be flipped backward to facilitate the maintenance of internal piping and critical hydraulic components.
- 集中润滑系统使车辆的保养便捷性极大地提升，有效保障机器的使用寿命。
  The centralized lubrication system greatly enhances maintenance convenience, effectively extending the machine’s service life.
- 燃油加热系统经济效益显著，尤其是在寒冷地区或冬季施工时。
  The fuel heating system offers significant economic benefits, especially in cold regions or during winter construction.
- 配备 360° 全景影像，安全性大幅提升，消除视野盲区，预防事故。
  Equipped with a 360° panoramic camera, safety is greatly improved by eliminating blind spots and preventing accidents.
- 原地转向功能，方便狭小空间转向及调头。
  The In-place turning function facilitates the turning and turning in small Spaces.

HD48H 480马力全液压推土机
480 HP Hydrostatic bulldozer

型号 / Model	HD48H
长 × 宽 × 高 (mm) (不含松土器) /Dimension (mm) (without ripper)	7085*4320*3990
长 × 宽 × 高 (mm) (含松土器) / Dimension (mm) (with ripper)	9325*4320*3990
使用重量 (KG) (含单齿松土器) / Weight (KG) (with single ripper)	56200
使用重量 (KG) (不含松土器) / Weight (KG) (without ripper)	51450
发动机型号 / Engine mode	WP17TG770E304
功率 (kw/r/min) / Power (kw/r/min)	566/1900
发动机排量 (L) / Engine displacement (L)	16.6
最大扭矩 (N.m/rpm)/ Maximum torque (N.m/rpm)	3300/(1200~1600)
接地长度 (mm) / Grounding length (mm)	3532
接地比压 (MPa)/ Ground specific pressure (MPa)	0.12
最小离地间隙 (mm) / Minimum ground clearance (mm)	680
爬坡性能 (°)/ Gradeability (°)	30
履带型式 / Track type	主节式单履齿 / Main single-tooth crawler board
履带板数量 (每边) / number of track shoes(each side)	40
履带板宽度 (mm) / Width of Track shoe (mm)	610
履带中心距 (mm) / Track Gauge (mm)	2260
链轨节距 (mm) / pitch (mm)	260
托轮数个数 (每边) / number of carrier rollers (each side)	2
支重轮个数 (每边) / number of Track roller (each side)	7
工作压力 (MPa) / Working Pressure (MPa)	23
铲刀型式 / Blade type	半 U / Semi-U Blade
铲刀长 x 高 (mm) / Blade length x height (mm)	4320*1950
铲刀容量 (m3) / Blade Capacity(m^3)	13.7
铲刀提升高度 (mm) / Blade lift height(mm)	1460
铲刀深度 (mm) / Blade depth (mm)	660
铲刀最大倾斜 (mm) / Maximum inclination of blade (mm)	900
松土器型式 / Ripper type	单齿 / single ripper
松土器重量 (T) / Ripper weight(T)	4.75
最大松土深度 (mm) / Maximum loosening depth (mm)	1245
松土器提升高度 (mm) / Looseners lifting height (mm)	1075


注：由于技术不断更新，本资料仅供参考，如有升级改动，以实物为准。
Note: Due to the contnuous update of technology,this infomaton is for reference only,ifthere is any upgrade and change,the actual product shalprevai.










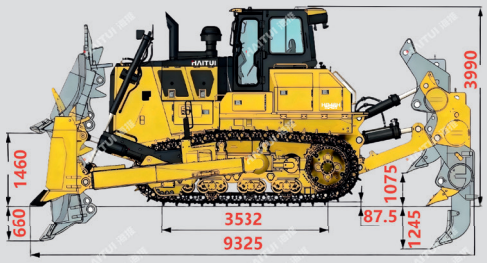

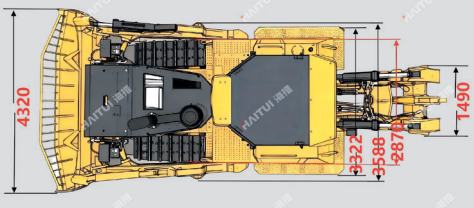

济宁海推重工机械股份有限公司
JINING HAITUI HEAVY INDUSTRY MACHINERY CO.,LTD
地址（ADD）：山东省济宁经济开发区宏祥路与嘉德路交汇处
Hongxiang Road and Jiade Road Cross，Jining Economic Development Zone, Shandong Province
售前(Pre-sales): 400-008-8869 售后(After-sales): 400-003-3989 E-mail: haitui@haituichina.com 网址: www.haituichina.com