



Qingdao Huizhi Runde International Trade Co.,Ltd




- Qingdao Huizhi Runde International Trade Co.,Ltd (Exporting company)
No.1201, 467-4 building, Changjiang Middle Road, Huangdao District, Qingdao City, Shandong Province.
Tel:0086-532-86990485
E-mail: admin@qdhzrd.com
Http:www.china-hzrd.com www.qdhzrd.en.alibaba.com
- Ningjin county Tianpeng Construction mechanical equipment Co., Ltd(Factory)
Shuangdui industrial park, Ningjin county, Shandong province
Tel:0086 534 5686755
Http:www.tianpengdiaolan.com
- Qingdao Huizhi Xinke construction equipment Co., Ltd(Leasing company)
Harbor Road and River Road junction, Huangdao District, Qingdao city.
Tel:0086 13969868589
Http://shop1465751053272.1688.com
- Domestic sales and leasing office
Room 805 Huafu International Hotel, Ningjin County, Dezhou city, Shandong province
Tel: 0086 18865700595

Company profile

Qingdao Huizhi Runde International Trade Co., Ltd.(formerly Ningjin Tianpeng Building Machinery Factory) is located at beautiful Qingdao city. Ever since developing the first suspended platform in 2006, we concentrate on our advanced technology, guaranteed quality and excellent service. Through unremitting efforts, our company has opened up domestic and international market.

We have developed three series and more than thirty varieties of suspended platforms after 10 years development and innovation. So far, we are able to satisfy the external construction and decoration for tall buildings and multistoried buildings, the operation of shipbuilding industry, the installation of stairwell, the building of large-scale tanks, tall chimneys, television towers and large bridges and so on.

Our sales kept soaring by its reliable product quality and comprehensive service. Our products are sold to all over China and internationally to Russia, Kazakhstan, UAE, Qatar, Kuwait, India, Vietnam and other countries, we also have forged long-term working relationships with these countries in many areas such as technology, sale and service.

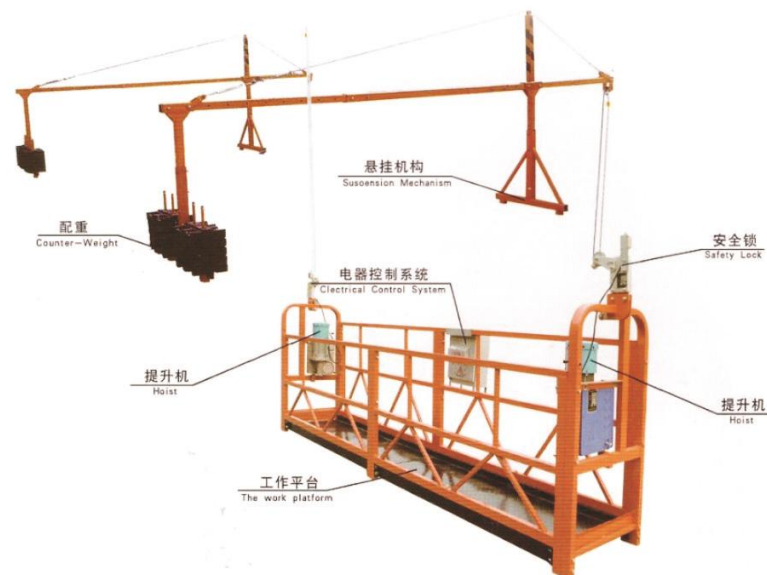

ZLP series suspended platform belongs to electrical-driven climbing and decorating machinery, mainly used to decorate, maintain and clean the external walls of high-level multi-storey buildings and exterior construction such as cement coating, veneer, paints, installing the glass curtain walls, painting as well as cleaning and maintenance. Also can be applied to the operating of big vessels and bridges, dams etc.

Applying this product can release scaffold free, reduce the construction cost and the efficiency will be greatly increased. Mean while, the production is simple flexible, easy transfer, easy to operate, safe and reliable.

Suspended platform



ZLP 250



ZLP 500



ZLP 630



ZLP 800

Material has two kinds of steel and aluminum alloy, the surface treatment has two kinds of hot dip galvanizing and spray-paint, assembly method has two kinds of screw and pin, all can be selected as required.

Type	ZLP250	ZLP500	ZLP630	ZLP800	ZLP1000
Rated Load	250 kg	500 kg	630 kg	800 kg	1000 kg
Lifting speed	9-11m/min	9-11m/min	9-11/min	9-11/min	8-10m/min
Voltage-3phase	380V/415V/220V	380V/415V/220V	380V/415V/220V	380V/415V/220V	380V/415V/220V
Frequency	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz
Rated power	1.1x1	1.1x2	1.5x2	1.8x2	2.2x2
Hoist model	LTD50	LTD50	LTD63	LTD80	LTD100
Safety lock model	LSL30	LSF30	LSF30	LSF30B	LSF30C
Wire rope	4x31SW+FC-8.3	4x31SW+FC-8.3	4x31SW+FC-8.3	4x31SW+FC-9.1	4x31SW+FC-10.2
Platform Size(LxWxH)	1.2m×0.65m×2.3m	(2.5x2)m×0.76m×1.42m	(2x3)m×0.76m×1.42m	(2.5x3)m×0.76m×1.42m	(2.5x3)m×0.76m×1.42m
Weight of suspension Jibs	170kg	340kg	340kg	340kg	340kg
Weight of Lifting Part	190kg(Steel) 130kg(Aluminum)	375kg(Steel) 290kg(Aluminum)	410kg(Steel) 320kg(Aluminum)	468kg(Steel) 354kg(Aluminum)	468kg(Steel) 354kg(Aluminum)

Weight of platform including the weight of working platforms, safety lock and electric control box.

Special designed suspended platform



U-shape suspended platform



90 degree angle suspended platform



45 degree angle suspended platform



Double deck suspended platform



Round shape suspended platform




Circular suspended platform

ZLJP400 suspended platform



Model	ZLJP400
Platform size	4000*600*1100MM
Configuration	2M+2M
Load capacity	400KG
Wire rope	7.5mm
Power	Foot power
Lifting speed	5-7m/min
Working height	100M
Net weight	330KG
Gross weight	450KG
Volume	2CBM

ZLJP200 suspended platform

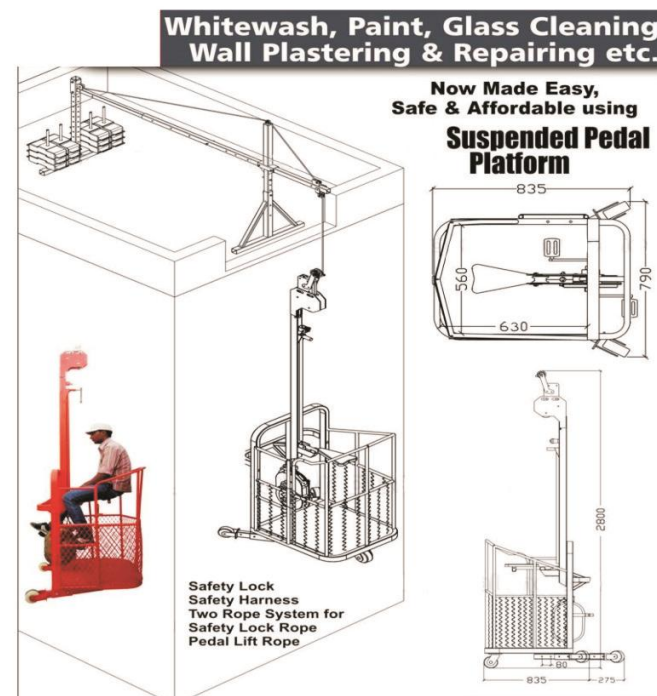

Model	ZLJP200
Platform size	835*790*2800MM
Load capacity	200KG
Wire rope	7.5mm
Power	Foot power
Lifting speed	5-7m/min
Working height	100M
Net weight	120KG
Gross weight	240KG
Volume	2.5CBM

Safety lock



LSF series safety lock is designed for long platforms with end stirrups.




LSL series safety lock is designed for single suspension work cages or platforms within L-stirrups.

The parameters of safety lock		
Model	LSF	LSL
Type	Anti-tilting	Centrifugal
Diameter	Φ8.3mm-9.1mm	Φ8.3mm-9.1mm
Allowable force	30kN	30kN
Locking Distance	≤200mm	≤200mm
Cable Locking Angle	3°-8°	
Cable locking speed		≥22m/min

Safety lock is the important safety device of suspended access equipment. The safety lock used by us has superior quality. It can automatically lock safety wire rope and ensure safety when the working wire rope is broken or suspended platform tilts to its limits.

Electric control system

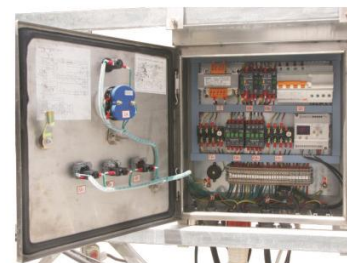

3-phase



Single-phase

Installed with international and national famous brands electrical components. Moreover, such safety devices as electric leakage protection device, relay protection of power system, automatic limited switch and the alert bell are installed to make operation easier, safer and more reliable.




New type with intelligent control module

Feature:

- 1) Platform stops when overweight.
- 2) Waterproof and anti fall
- 3) Working condition temperature -45°C to 80°C
- 4) Easy to install and repair

LTD series hoist

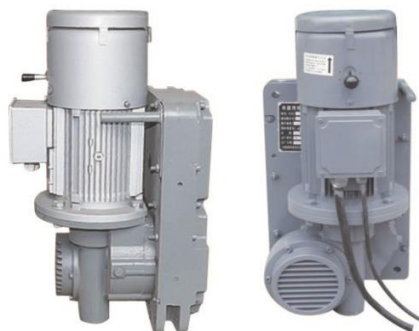

LTD800A/LTD1000A

“S” wire - guiding hoist
LTD800A/LTD1000A is adopting “S” rope-guiding system, equipped with vertical breaking motor of high performance and reliability. This type is powerful in lifting force and steady in operation. It is mainly applied to heavy capacity transit.


“α” wire - guiding hoist
LTD500/LTD630/LTD800/LTD1000 is adopting “α” rope-guiding system, light and handy in design, compact in structure, light in weight, easy in operation and maintenance. It is mainly applied to moderate or light capacity transit.



LTD 500/LTD630/LTD800/LTD1000

The parameters of LTD series hoist						
Type	LTD1000A	LTD800A	LTD1000	LTD800	LTD630	LTD500
Rate Lifting Force	1000KG	800KG	1000KG	800KG	630KG	500KG
Lifting Speed	8-10m/min	8-10m/min	8-10m/min	9-11m/min	9-11m/min	9-11m/min
Voltage	380V/415V/220V	380V/415V/220V	380V/415V/220V	380V/415V/220V	380V/415V/220V	380V/415V/220V
Frequency	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ
Power	3.0kw	2.2kw	2.2kw	1.8kw	1.5KW	1.1KW
Weight	90kg	88kg	53kg	50kg	50KG	50KG
Braking torque	15N.m	15N.m	15N.m	15N.m	15N.m	15N.m
Rotate Speed	1400r/min	1400r/min	1400r/min	1400r/min	1400r/min	1400r/min

Suspended mechanism



Rope guide device




Rope locking device


Rope guide & rope locking device feature:

- 1) It can save installation time.
- 2) It can avoid the damage caused by removal and counting of rope clamps.
- 3) It is convenient retractable wire rope, spare wire rope can be put on the roof.
- 4) It is more safer than before and full complied with national standards.

Parapet clamp

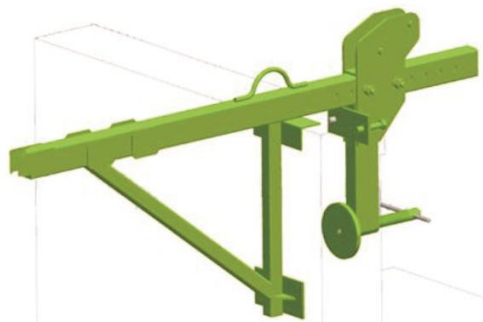

Parapet clamp is a kind of special suspension mechanism and is suited for parapet wall. But the wall must be loaded strong strength. The front beam overhang can be adjustable 600mm~1000mm, the clamp thickness is 200mm~600mm.

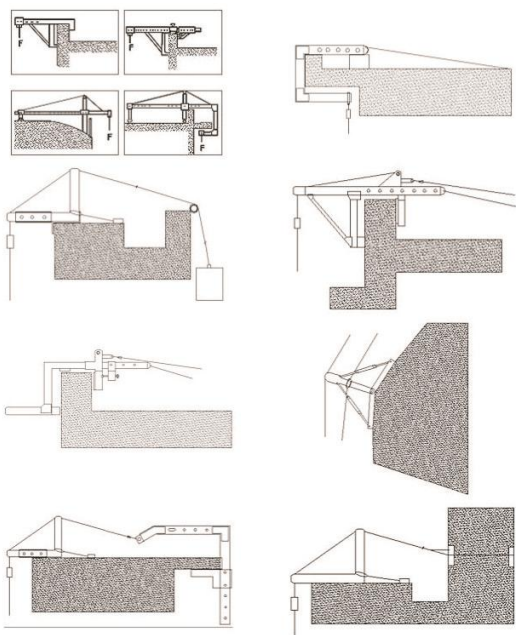

In addition to general used, we can also make special type in according with different building wall.

Project Reference



Bridgework construction



Power plant construction



Apartment construction



Bridge floor construction



Shopping mall construction



Hospital construction