


P120L HOSE CRIMPING MACHINE

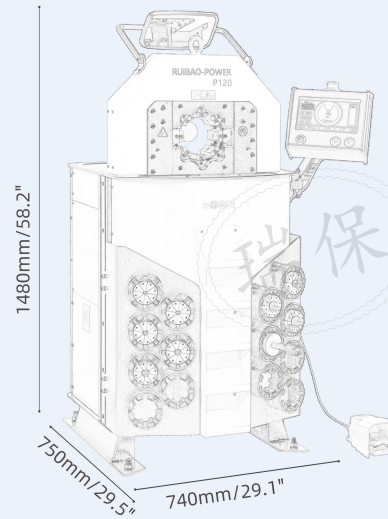

技术参数 TECHNICAL DATA

扣压范围 Crimping range (mm)	6-125
扣压范围 Crimping range (inch)	4"
压接力 Crimping force (KN)	2800
压接力 Crimping force (TON)	280
合模速度 Closing speed of master dies (sec)	13
最大软管尺寸 Max hose size (inch)	3
模具型号 Type of dies	P20/P120
最大开口尺寸 Maximum opening (mm)	+60
最大开口 (不含模具) Max opening without dies (mm)	180
主模具尺寸 Master die D/L (mm)	120/99
主模具尺寸 Master die D/L (inch)	4.72/3.89
电机功率 Motor Power (kW)	4.0
电压 (V) 三相 Voltage (V) three-phase	200.220.380.400.440
电压 (V) 二相 Voltage (V) two-phase	110.220.230.240
油箱容量 Oil tank volume (L)	70

尺寸 DIMENSIONS (LxWxH)

机器 Machine (mm)	740*750*1480
机器 Machine (inch)	29.1*29.5*58.2
包装 Package (mm)	900*860*1700
包装 Package (inch)	35.43*33.85*66.93

重量 WEIGHT (KG)

净重 N.W.	800
毛重 G.W.	910

数控功能特色

※ 张开尺寸可设定	※ 扣压计数
※ 扣压尺寸可差补	※ 重要扣压参数保存
※ 扣压保压延时	※ 扣压压力显示
※ 可变速	※ 自动启停
※ 扣压压力品质监控	※ 非标模具适用

模具 P20 SERIES

Die Set No	D (mm)	L (mm)	Crimp. range (mm)
P20/6*	06	55	6.0-8.0
P20/8*	08	55	8.0-10.0
P20/10*	10	55	10.0-12.0
P20/12*	12	55	12.0-14.0
P20/14	14	55	14.0-16.0
P20/16	16	55	16.0-19.0
P20/19	19	55	19.0-23.0
P20/23	23	55	23.0-27.0
P20/27	27	70	27.0-31.0
P20/31	31	70	31.0-36.0
P20/36	36	75	36.0-41.0
P20/41	41	75	41.0-47.0
P20/47	47	85	47.0-54.0
P20/54	54	95	54.0-57.0

模具 P120 SERIES

Die Set No	D (mm)	L (mm)	Crimp. range (mm)
P120/57	57	100	57.0-63.0
P120/63	63	115	63.0-69.0
P120/69	69	115	69.0-74.0
P120/74*	74	115	74.0-78.0
P120/78*	78	115	78.0-84.0
P120/84*	84	115	84.0-92.0
P120/92*	92	115	92.0-100.0
P120/100*	100	115	100.0-108.0
P120/108*	108	115	108.0-125.0

*: 非标配模具。Non standard mold.

