



EMD3032

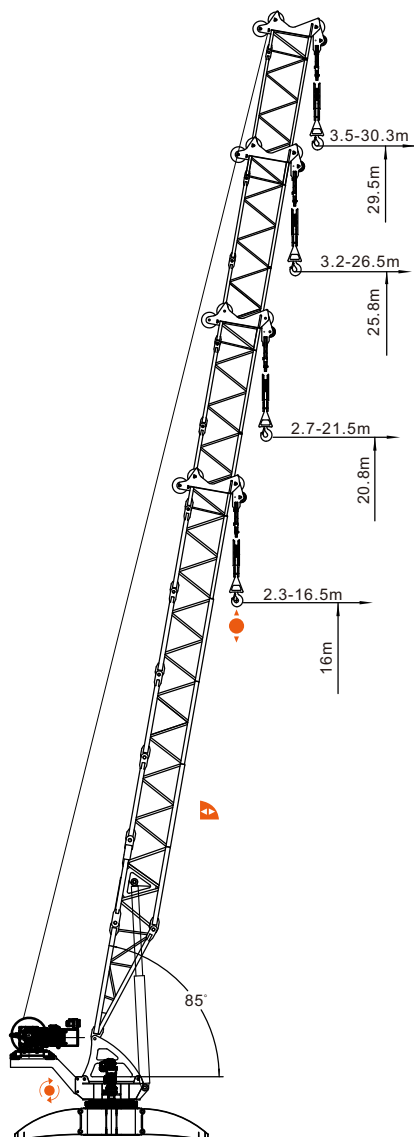

Load chart

Curvas de cargas Кривые нагрузок

Jib (m)	Fall	Range (m)	3.5–9.37	12	15	16.5	19	21.5	24	26.5	30.3
30.3	IV	Load (t)	16	11.73	8.84	7.58	6.20	5.14	4.30	3.73	2.80
	III		12	11.93	9.04	7.78	6.40	5.34	4.50	3.93	3.00
	II		8			7.98	6.60	5.54	4.70	4.13	3.20
Jib (m)	Fall	Range (m)	3.2–9.38	12	15	16.5	19	21.5	24	26.5	
26.5	IV	Load (t)	16	11.75	8.85	7.80	6.22	5.15	4.31	3.63	
	III		12	11.95	9.05	8.00	6.42	5.35	4.51	3.83	
	II		8				6.62	5.55	4.71	4.03	
Jib (m)	Fall	Range (m)	2.7–9.39	12	15	16.5	19	21.5			
21.5	IV	Load (t)	16	12.02	8.93	7.86	6.28	5.22			
	III		12		9.13	8.06	6.48	5.42			
	II		8				6.68	5.62			
Jib (m)	Fall	Range (m)	2.3–9.40	12	15	16.5					
16.5	IV	Load (t)	16	12.06	8.97	7.90					
	III		12		9.17	8.10					
	II		8								

Mechanism

Mecanismos Механизмы

Name	Model						Power
Hoisting 	50LVF40	m/min	t	m/min	t	820m Inverter Control	37Kw
		0–22	8	0–11	16		
		0–44	4	0–22	8		
Hoisting 	75LVF40	m/min	t	m/min	t	650m Inverter Control	55Kw
		0–40	8	0–20	16		
		0–80	4	0–40	8		
Luffing 		m/min	≤ 2.5			Hydraulic	30Kw
Slewing 	7.5RVF×2	r/min	0–0.7			Inverter Control	2×5.5Kw
Power Supply				380V/50Hz 440V/60Hz (± 5%)			
Necessary Power				98KVA/120KVA			

※ Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.