


EMD1830A

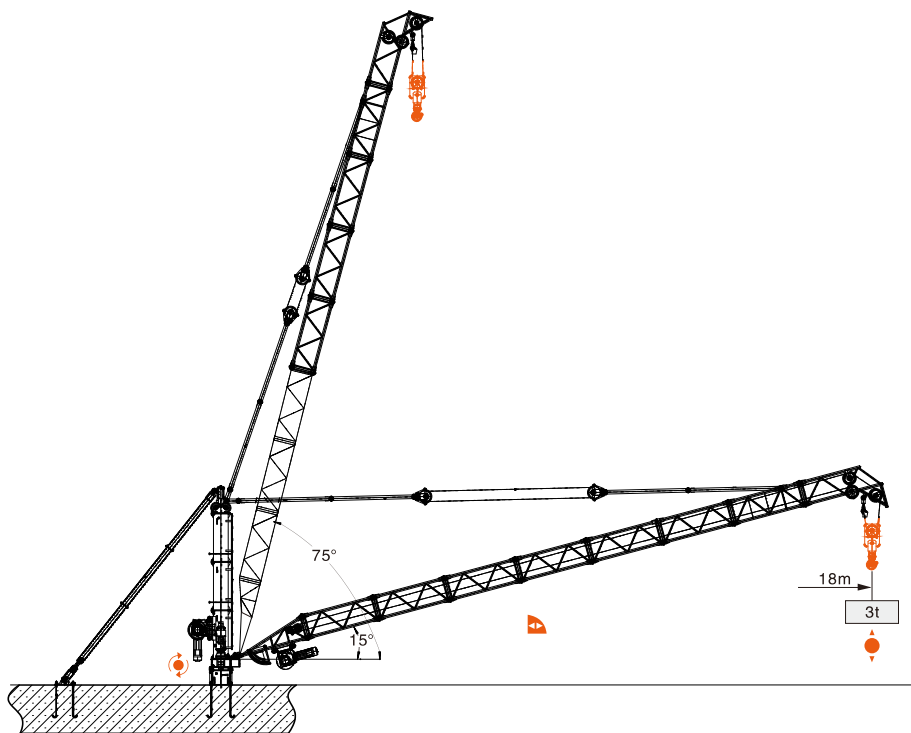

Load chart

Curvas de cargas Кривые нагрузок

Jib (m)	Fall	Range (m)	5.3	7.5	10	13	15	18
		Luffing Degree	75.0°	67.3°	58.2°	45.6°	35.8°	15°
18	II	Load (t)	4					3
	I		2					
Jib (m)	Fall	Range (m)	4.2	7.5	10	13	15	
		Luffing Degree	75.0°	62.1°	50.6°	33.6°	15°	
15	II	Load (t)	4					
	I		2					

Mechanism

Mecanismos Механизмы

Name	Model						Power
Hoisting 	10LVF20	m/min	t	m/min	t	400m Inverter Control	7.5Kw
		0-20	2	0-10	4		
		0-40	1	0-20	2		
Luffing 	10DVF20	m/min	≤ 3.0			Inverter Control	7.5Kw
Slewing 	5RVF	r/min	0-0.7			Inverter Control	4Kw
Power Supply				380V/50Hz 440V/60Hz (± 5%)			
Necessary Power				24KVA			

※ Specifications and data is not legally binding.
For any technical information, please refer to the corresponding instructions.