
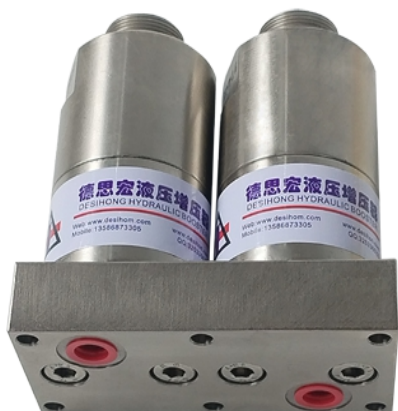


不断创新


追求卓越

Constant innovation, Striving for excellence



双高压增压器安装尺寸

Dimensions of two booster Manifold

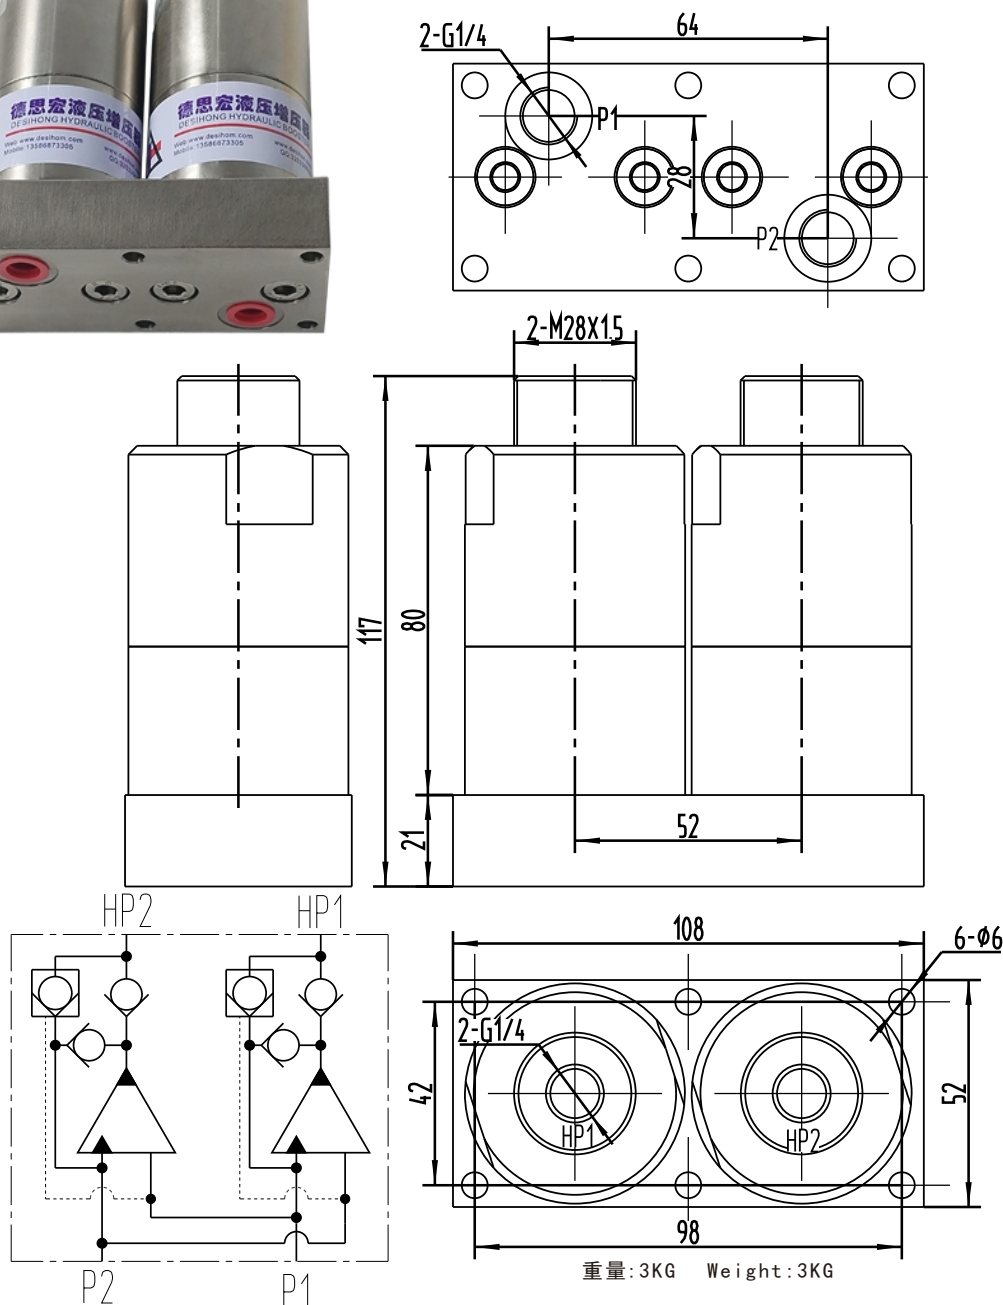

此增压器适合油缸正反都需要增压场合，正反增压比可以选择不同比例，体积小，集成度高

This booster is suitable for applications where both positive and negative pressure boosting of the cylinder are required. The positive and negative pressure boosting ratios can be selected in different ratio. It has a small size and high integration level.

选型示例: BST-TY-3.4-3.4G T系列增压器，带卸荷功能，3.4和3.4倍率增压比，管式连接

BST-TY-4.0-5.0GSTC T系列增压器，带卸荷功能，4和5倍率增压比，管式连接, 带顺序功能，阀芯加硬

Example: BST-TY-3.4-3.4G T series, with unloading function, intensification factors is 3.4 and 3.4, threaded Manifold

BST-TY-4.0-5.0GSTC T series, with unloading function, intensification factors is 4 and 5, threaded Manifold

With sequence function, the valve core is hardened