
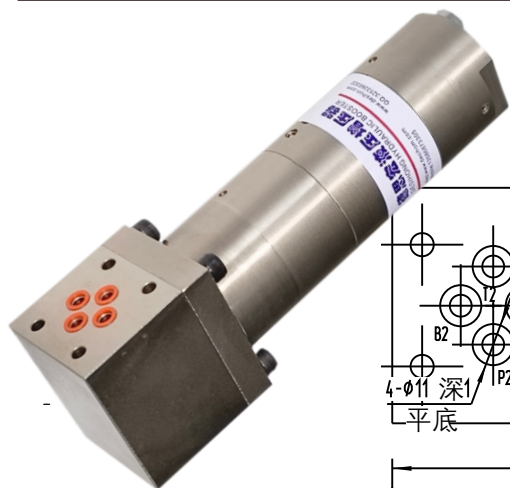



不断创新

追求卓越

Constant innovation, Striving for excellence




叠加式安装尺寸(DA/P/G)
Dimensions of Stacking Manifold

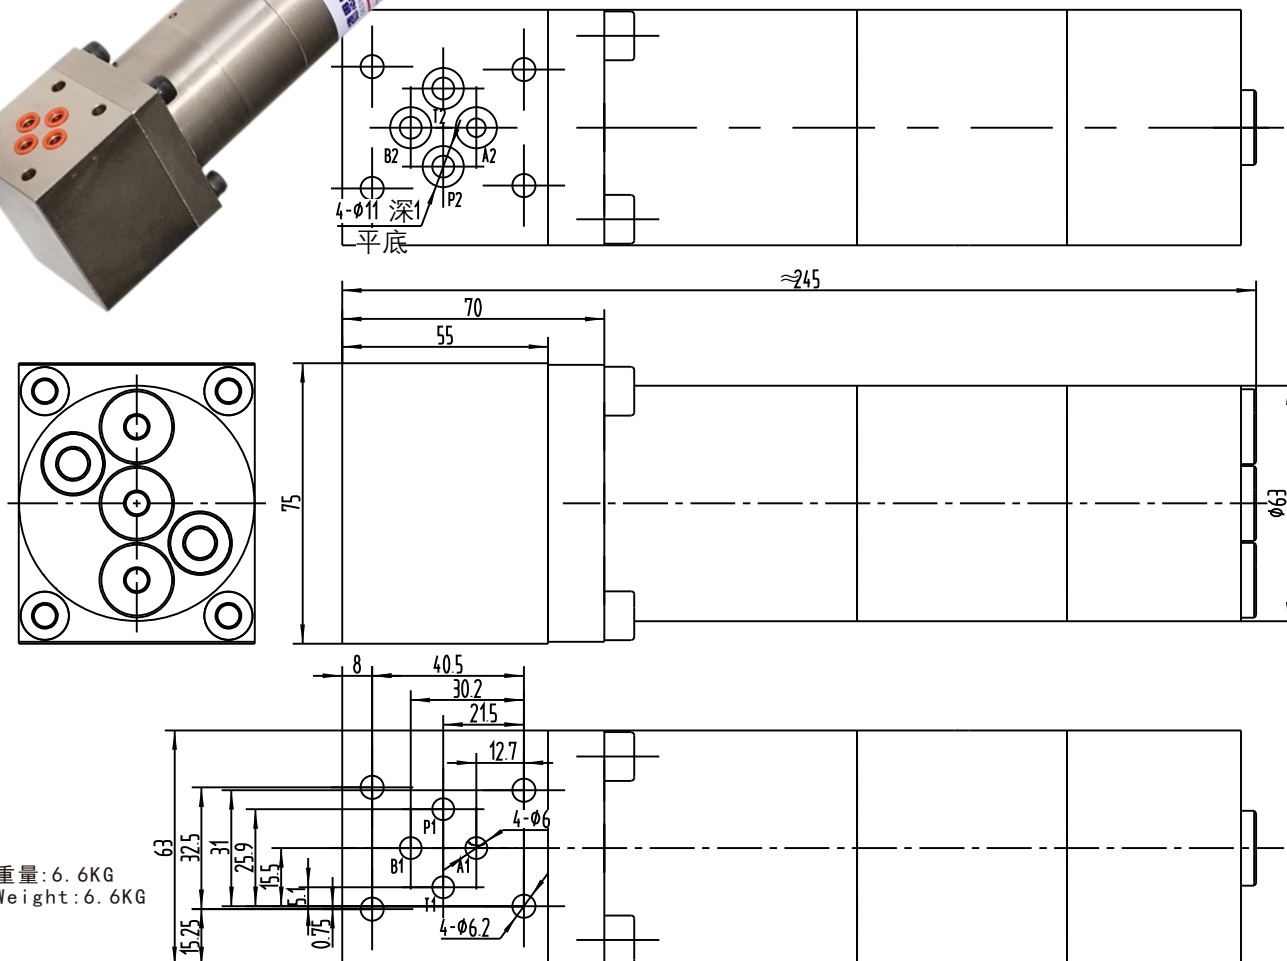

重量: 6.6KG
Weight: 6.6KG

注意: 连接孔不得大于 6mm
NOTE: connect hole $\leq 6\text{mm}$

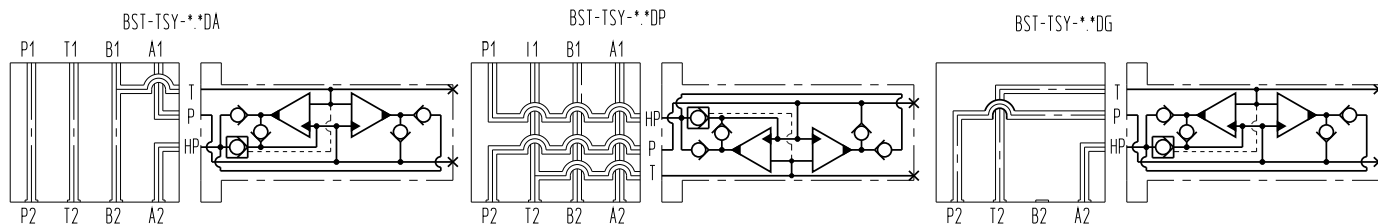

注意: DP型P口增压后, 经过换向阀切换, A、B口都输出高压, 注意换向阀承受了高压
NOTE: DP type booster P out put the high pressure, after switching by the directional valve, both Port A and Port B output high pressure. Note that the directional valve is subjected to high pressure

选型示例:

BST-TSY-2.5DA TS系列增压器, 带卸荷功能, 2.5倍率增压比, 叠加式连接, A口增压

BST-TSY-3.5DG TS系列增压器, 带卸荷功能, 3.5倍率增压比, 叠加式连接, G型增压方式

Example:

BST-TSY-2.5DA TS series, with unloading function, intensification factors is 2.5, Staking Manifold, A boost

BST-TSY-3.5DG TS series, with unloading function, intensification factors is 3.5, Staking Manifold, G boost