


专注于液压增压器的研发


Focus on the research of hydraulic booster



高压型安装尺寸(MG)

High Pressure Dimensions (MG)


增压比 RATIO	额定输入流量 INPUT LPM	临界输出流量 OUTPUT LPM	额定输入压力 INPUT BAR	额定输出压力 OUTPUT BAR	额定频率 FREQUENCY
16	50	2.1	200	3200	500
20	50	1.5	200	4000	510




高压型安装尺寸(LG HJ)

High Pressure Dimensions (LG HJ)


盖板
COVER PLATE

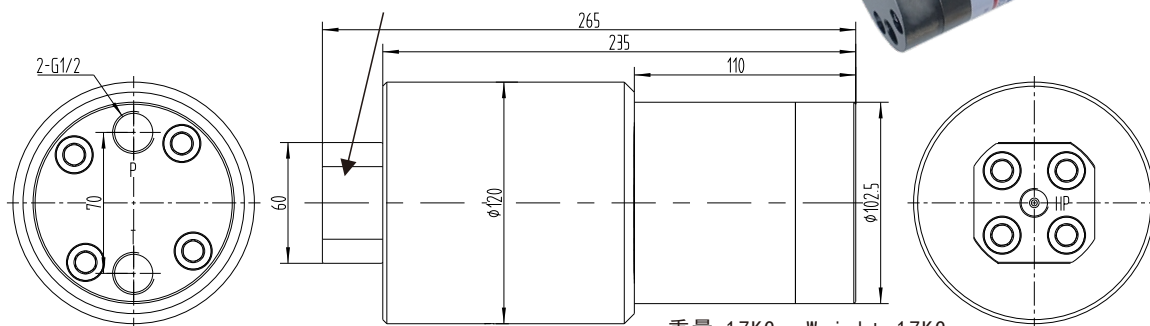

标配TC加硬阀芯, HJ加硬阀体, 可用于长时间冲击试验类工况
盖板的选择查看页面20



装配示意图



选型示例: BST-LGN-20GHJ LG高压型增压器, 不带卸荷功能, 20增压比例, HF4连接

Example: BST-LGN-20GHJ LG type booster no unloading function, intensification factors is 20 and LG Mounting.