


High Frequency External Vibrator (Pneumatic)

»» Features

1. Quick mount design using hook base bracket and simple hinge bolt.
2. High frequency vibration for excellent surface finishing.
3. Totally sealed design for steam curing environment.

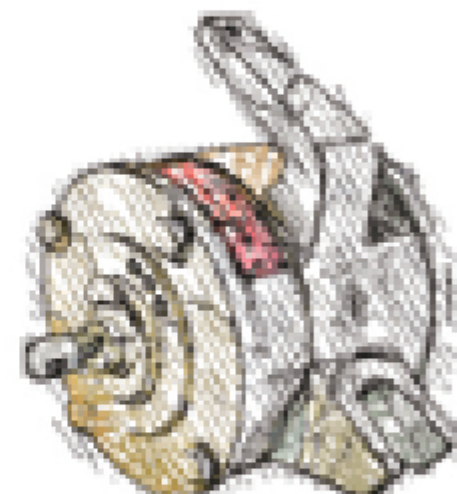

CRJ606LF



CR100LFA


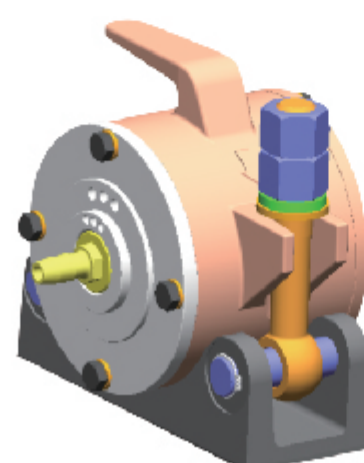


Figure for installment

»» System

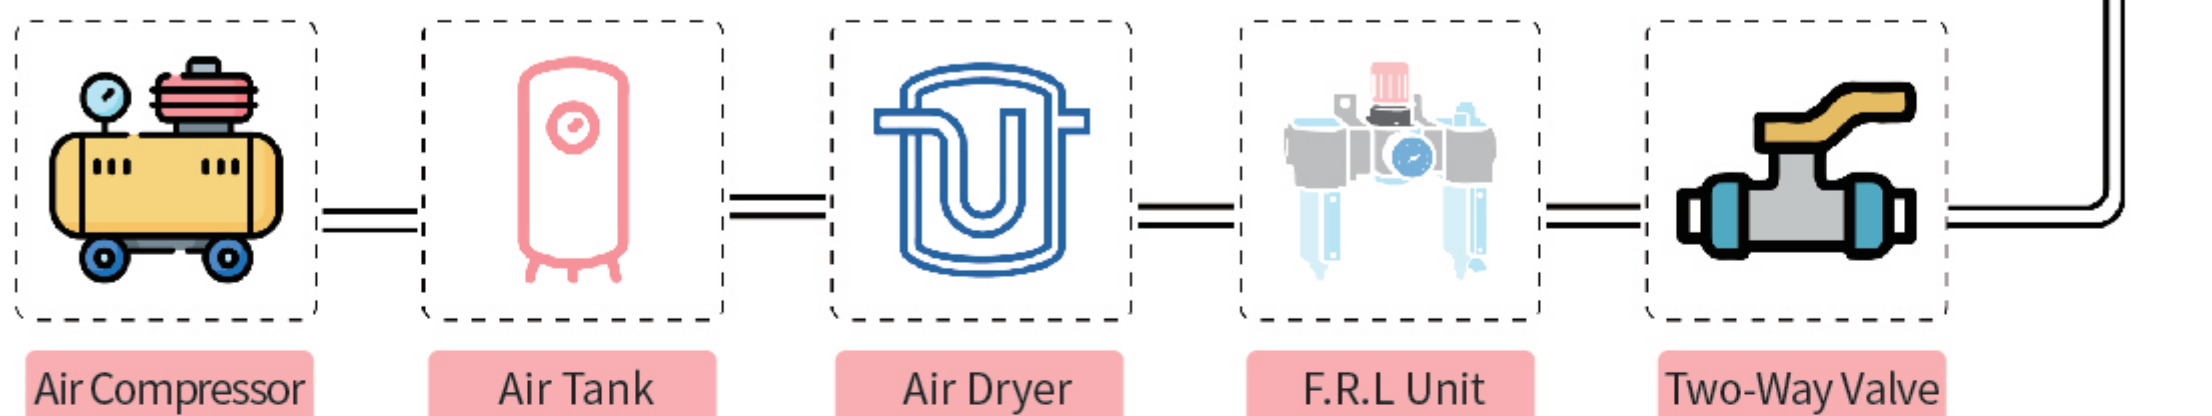

»» Specifications

Model	Frequency (Hz)	Centrifugal Force (kN)	Air Consumption (Nm ³ /min)	Air Pressure (MPa)	Base Type	Weight (kg)
CRJ606LF	200	4.1	800	0.2-0.6	CRJ606LF	5.5
CRJ610LF	200	6.8	800	0.2-0.6	CRJ606LF	7.5
CR80LF	217	25	1680	0.2-0.6	CR100	15.9
CR90LF	217	33	1680	0.2-0.6	CR100	16.5
CR100LFA	217	56	1680	0.2-0.6	CR100	18.0

»» Application

