
ANJER


Focused On HIGH-END Concrete Pump Truck Customization, minimum order of 1 unit, 60-day delivery

70-6RZ



DIAGRAMS

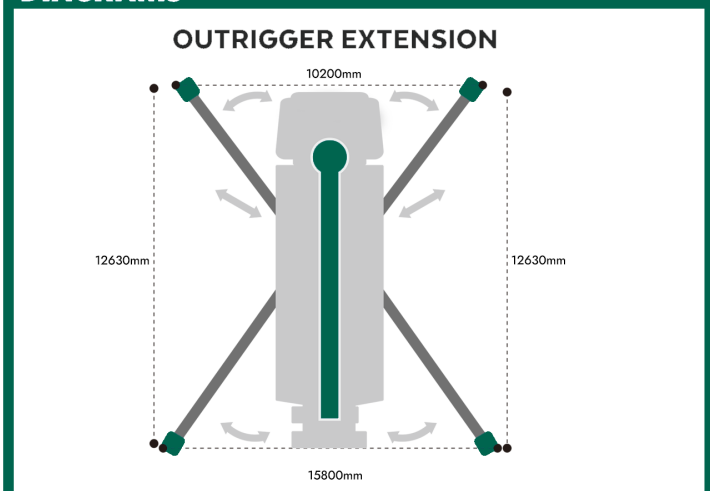

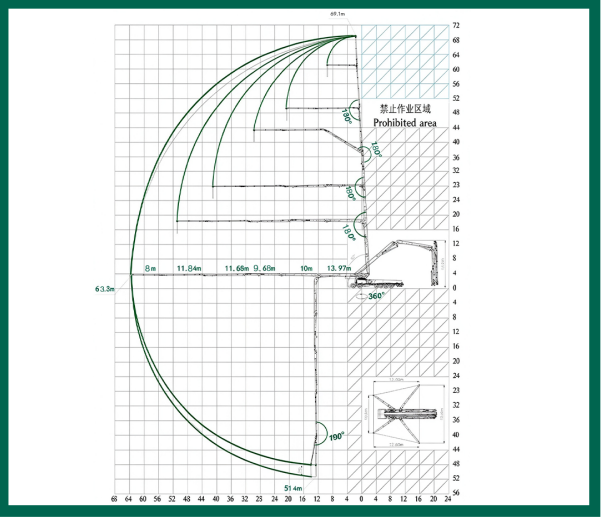

CONFIGURATION

Hydraulic system	Open
Main hydraulic oil pump	Rexroth
Boom pump	Rexroth
Boom multi-way valve	Danfoss
Main CyL. E/H directional valve	Tokyo Keiki/Eaton
Swing CyL. E/H directional valve	Tokyo Keiki
Swing cylinder charging valve	Tokyo Keiki

PUMP

Theor. output	190 m³/h
Theor. pressure	9.3 Mpa
Pumping times/min	28 stroke
Delivery cylinder stroke	2100 mm
Main cylinder stroke	2100 mm
Pipeline size	125 mm
Hopper capacity	0.7 m³
Feeding height	1540 mm
Piping level	Double

GENERAL

Dimensions(L * W * H)	16090x2550x4000
Model Chassis	AROCS 12*4
Wheel base	1750+4600+1350 +1350+1350
Engine power	460 KW
Total mass	≤59550 kg

BOOM

Boom sections	6
Boom expansion type	RZ
Vertical reach	69.1 m
Horizontal reach	63.3 m
Reach depth	51.4 m
Unfolding reach	13.2 m