

Focused On HIGH-END Concrete Pump Truck Customization, minimum order of 1 unit, 60-day delivery

43-5Z



DIAGRAMS

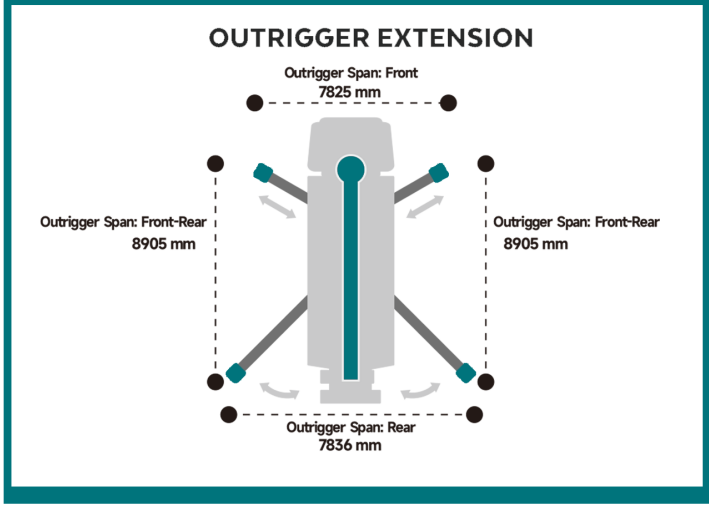

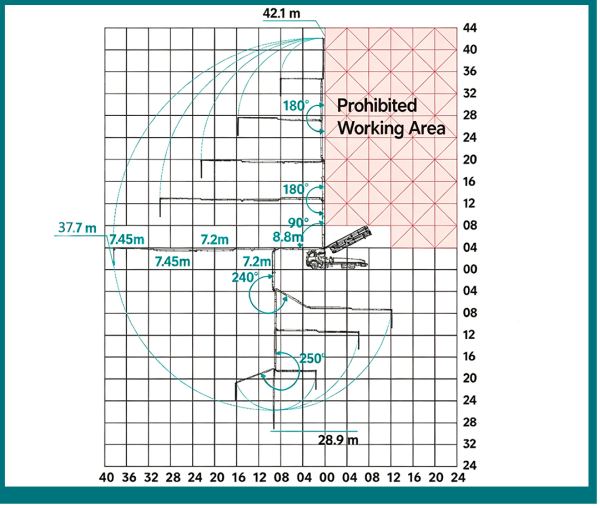

CONFIGURATION

Hydraulic system	Open
Main hydraulic oil pump	Rexroth
Boom pump	Rexroth
Main CyL. E/H directional valve	Tokyo Keiki
Swing CyL. E/H directional valve	Tokyo Keiki
Swing cylinder charging valve	Tokyo Keiki
Solenoid unloading valve	Eaton

PUMP

Theor. output	160 m³/h
Theor. pressure	9.3 Mpa
Pumping times/min	29 stroke
Delivery cylinder stroke	1800 mm
Main cylinder stroke	1800 mm
Pipeline size	125 mm
End hose length	3 m
Hopper capacity	0.7 m³
Piping level	Double

GENERAL

Dimensions(L * W * H)	11477×2550×4000
Model Chassis	AROCS 8*4
Wheel base	4200+1350+1350
Engine power	510 Hp
Total mass	≤32000 kg

BOOM

Boom sections	5
Boom expansion type	Z
Vertical reach	42.1 m
Horizontal reach	37.7 m
Unfolding height	8.1 m
Turret rotation angle	±360°