HAITUI 海推

HD60

标准型推土机
Standard Bulldozer

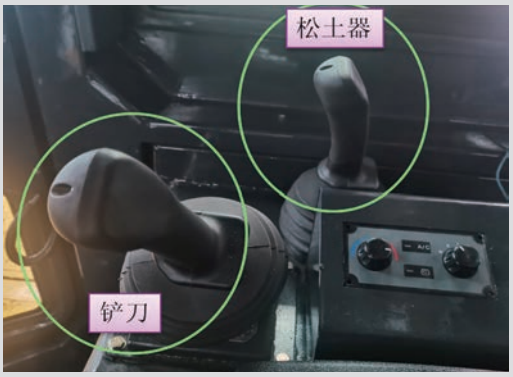


- 整机核心部件采用模块化设计，拆装方便维修简单。
  The core components of the machine adopt a modular design, facilitating easy disassembly and simple maintenance.
- 康明斯电控发动机，欧Ⅲ排放标准，612 马力，空空中冷，动力强劲、油耗低。
  Equipped with a Cummins electronically controlled engine, meeting Euro III emission standards, delivering 612 horsepower with air-to-air intercooling, providing strong power and low fuel consumption.
- 大排量智能温控液压风扇，不仅完美散热，还可反转除尘。
  A large-displacement intelligent temperature-controlled hydraulic fan not only ensures optimal cooling but also features reverse rotation for dust removal.
- K 型浮动式支重轮悬挂机构及主节式密封润滑履带，减少整机震动，提高行走系统使用寿命。
  K-type floating track roller suspension and master-sealed lubricated tracks reduce machine vibration and extend the service life of the walking system.
- 核心液压件、控制手柄、控制器及管路选用派克、力士乐、泊姆克、林德等国际一线品牌。
  Core hydraulic components, control levers, controllers, and pipelines are sourced from top international brands such as Parker, Rexroth, Poclain, and Linde.
- 单手柄变速转向操纵，快速、高效实现对变速转向的控制。
  Single-lever speed and steering control enables fast and efficient operation.
- 工作装置操纵采用先导控制技术，操纵力小，控制精度高，降低了操作强度，提高工作效率。
  The working device adopts pilot control technology, requiring minimal operating force with high precision, reducing operator fatigue and improving efficiency.
- 360 全景监控系统使驾驶员拥有 360 度全视角驾驶视野，不存在任何盲区，提高了驾乘的便捷和安全性。
  A 360-degree panoramic monitoring system provides the driver with a full-view driving perspective, eliminating blind spots and enhancing convenience and safety.
- 集中润滑系统使车辆的保养便捷性极大地提升，有效保障机器的使用寿命。
  A centralized lubrication system significantly improves maintenance convenience, effectively extending the machine's service life.
- 适配了德国 Webasto 燃油式水暖加热器和气暖加热器、座椅集成了电加热和气囊减震功能，大大提升了极寒环境适应性及驾乘舒适性。
  Compatible with German Webasto fuel-based water and air heaters, and seats integrated with electric heating and air suspension functions, greatly enhancing adaptability in extreme cold environments and driving comfort.
- 适配了松土器自动拔销器、USB 收音机、USB 充电口等。
  Supports automatic ripper pin pullers, USB radios, USB charging ports, and more.

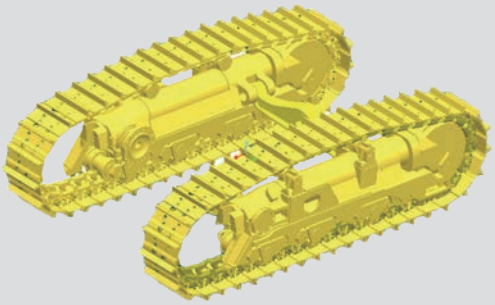
HD60 标准型推土机 Standard Bulldozer

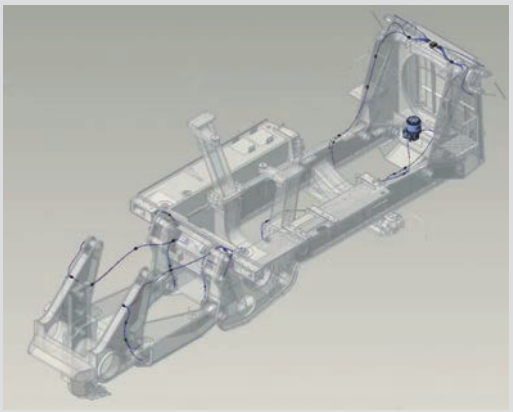
型号 Model	HD60
长 × 宽 × 高 (mm) (不含松土器) /Dimension(with out ripper)	7640*4690*4530
长 × 宽 × 高 (mm) (含松土器) /Dimension(with ripper)	10390*4690*4530
使用重量 (T) (不含松土器) /Operating weight(T) (with out ripper)	66.7
使用重量 (T) (含单齿松土器) /Operating weight(T) (with single ripper)	70.63
发动机型号 /Engine model	QSK19-C604
功率 /Rated power(kw/r/min)	450/1800
发动机排量 (L) /Displacement (L)	19
最大扭矩 (N.m/rpm)/peak torque (N.m/rpm)	3019/1300
最小转弯半径 (m) /Minimum Turning Radius (m)	6.786
接地长度 (mm) /ground contact length (mm)	3840
接地比压 (MPa)/ground contact pressure(MPa)	0.1469
最小离地间隙 (mm)/minimum ground clearance (mm)	610
履带板数量 (每边)/Track shoes (each side)	40
履带板宽度 (mm)/track shoe width(mm)	610
履带中心距 (mm)/track gauge(mm)	2500
链轨节距 (mm)/track chain pitch(mm)	280
托轮数个数 (每边) /Number of supporting wheels (each side)	2
支重轮个数 (每边) /Number of track rollers (each side)	7
工作压力 (MPa)/working pressure (MPa)	21
液压系统流量 (L/min)/hydraulic system flow rate (L/min)	395.1
最大牵引力 (KN)/maximum traction force (KN)	580
铲刀型式 /blade type	半 U 铲 /Semi U blade
铲刀长 x 高 (mm)/Blade Length × Height(mm)	4690*2250
铲刀容量 (m^3)/scraper blade capacity(m^3)	18.5
铲刀提升高度 (mm)/Lifting height of the blade(mm)	1660
铲刀深度 (mm)/blade depth(mm)	715
铲刀最大倾斜 (mm)/Maximum inclination of the blade(mm)	730
松土器型式 /ripper type	单齿 /Single shank
松土器重量 (T)/Ripper weight(T)	3.59
最大松土深度 (mm)/Maximum ripping depth(mm)	1435
松土器提升高度 (mm)/Ripper lifting height(mm)	1105
前进各档速度 (km/h)/forward speed(km/h)	F1:0 ~ 3.9
	F2:0 ~ 6.8
	F3:0 ~ 12.1
后退各档速度 (km/h)/reverse speed(km/h)	R1:0 ~ 5.3
	R2:0 ~ 9.6
	R3:0 ~ 15.9
冷却液容量 (L) /Coolant capacity (L)	122
燃油箱容量 (L) /Fuel Tank Capacity (L)	1150
发动机机油容量 (L) /Engine oil capacity (L)	70

如技术参数变更，以销售人员介绍的最新参数为准
Materials and specifications are subject to change without notice



先导工作装置 Pilot joystick


K 型浮动式支重轮 K-type floating track roller


美国林肯集中润滑 Lincoln Centralized lubrication



单齿松土器 Single shank ripper

济宁海推重工机械股份有限公司
JINING HAITUI HEAVY INDUSTRY MACHINERY CO.,LTD
地址 (ADD) ：山东省济宁经济开发区宏祥路与嘉德路交汇处
Hongxiang Road and Jiade Road Cross，Jining Economic Development Zone, Shandong Province
售前 (Pre-sales): 400-008-8869 售后 (After-sales): 400-003-3989 E-mail: haitui@haituichina.com 网址: www.haituichina.com