


我们的建筑升降机载重可达3200kg,提升速度可达96m/min,最大架设高度可达350m。除了一般施工用的施工升降机,我公司还专为特殊建筑物的施工设计并生产了特种施工升降机。其中包括曲线形施工升降机、倾斜式施工升降机、双柱大吨位施工升降机以及小型工业用施工升降机等。

Our building hoist payload capacity is as much as 3200kg, lifting speed can reach up to 96m/min, and the erection height reaches up to 350m. Beside the normal type, our company has also designed and manufactured specialized hoists for construction of special building, such as curve, slope, twin mast, large tonnage and small size industrial building hoist and so on. We put the quality of products the first place all the time, we import reliable electric components from Europe, the steel structure is semi-automatically gasprotected welding shaped. The mast section can be steel painting or dipping zinc. At the mean time, the cage size can be designed according to the customers' need. We have normal building hoist, frequency conversion building hoist, small size hoist, curve building hoist, twin mast building hoist, and so on.


1. 速度：每分钟36米到每分钟96米。
 2. 吊笼：单笼或双笼。
 3. 额定载重量：1000kg到3200kg。
 4. 安装高度：30米到350米。
 5. 吊笼规格：根据顾客需求。
1. Speed: from 36m/min to 96m/min
 2. Cage: one cage or twin cage
 3. Rated Load: 1000kg to 3200kg
 4. Installation Height: From 30m to 350m
 5. Size of cage: according to customers' need




附墙架
Tie-in



超载保护器
Overload Protector

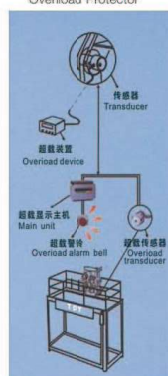

防坠安全锁
Safety device

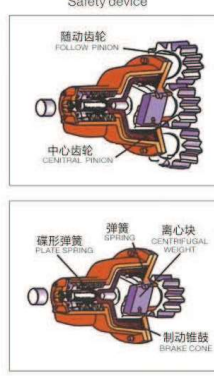

产品配色
Product Colour



普通升降机 | General Building Hoist

1. 结构简单、成本低
 2. 安装、维修方便
1. Simplicity and cost saving
 2. Easy for installation and maintenance

技术参数/Technical parameter

产品型号 model	额定载重量(kg) Capacity	提升速度(m/min) Lifting speed	电机功率(kw) Motor power	对重重量(kg) Counter weight
SC100TD	1000	0~36	2×11	0
SC120TD	1200	0~36	2×11	0
SC200TD	2000	0~36	3×11	0
SC100/100	2×1000	0~36	2×2×11	0
SC100/100TD	2×1000	0~36	2×2×11	0
SC120/120TD	2×1200	0~36	2×2×11	0
SC200/200TD	2×2000	0~36	2×2×11	0

备注/Remark:

1. 吊笼尺寸推荐规格 (L*W*H) (m): 3.2*1.5*2.5或2.5*1.3*2.5; 3*1.3*2.5; 3.2*1.5*2.5; 3.6*1.5*2.5; 3.8*1.5*2.5; 4*1.5*2.5; 4.2*1.5*2.5
 2. 特殊尺寸可根据客户需要制作。
 3. 标准节是650*650*1508mm, 或根据客户需要制作。
1. Standard cage dimension is 3.2*1.5*2.5 other available cage dimension (L*W*H)(m): 2.5*1.3*2.5; 3*1.3*2.5; 3.2*1.5*2.5; 3.6*1.5*2.5; 3.8*1.5*2.5; 4*1.5*2.5; 4.2*1.5*2.5
 2. Special dimension can be made according to requirement of customer.
 3. Standard mast section is 650*650*1508mm, or can be made according to requirement of customer.

