


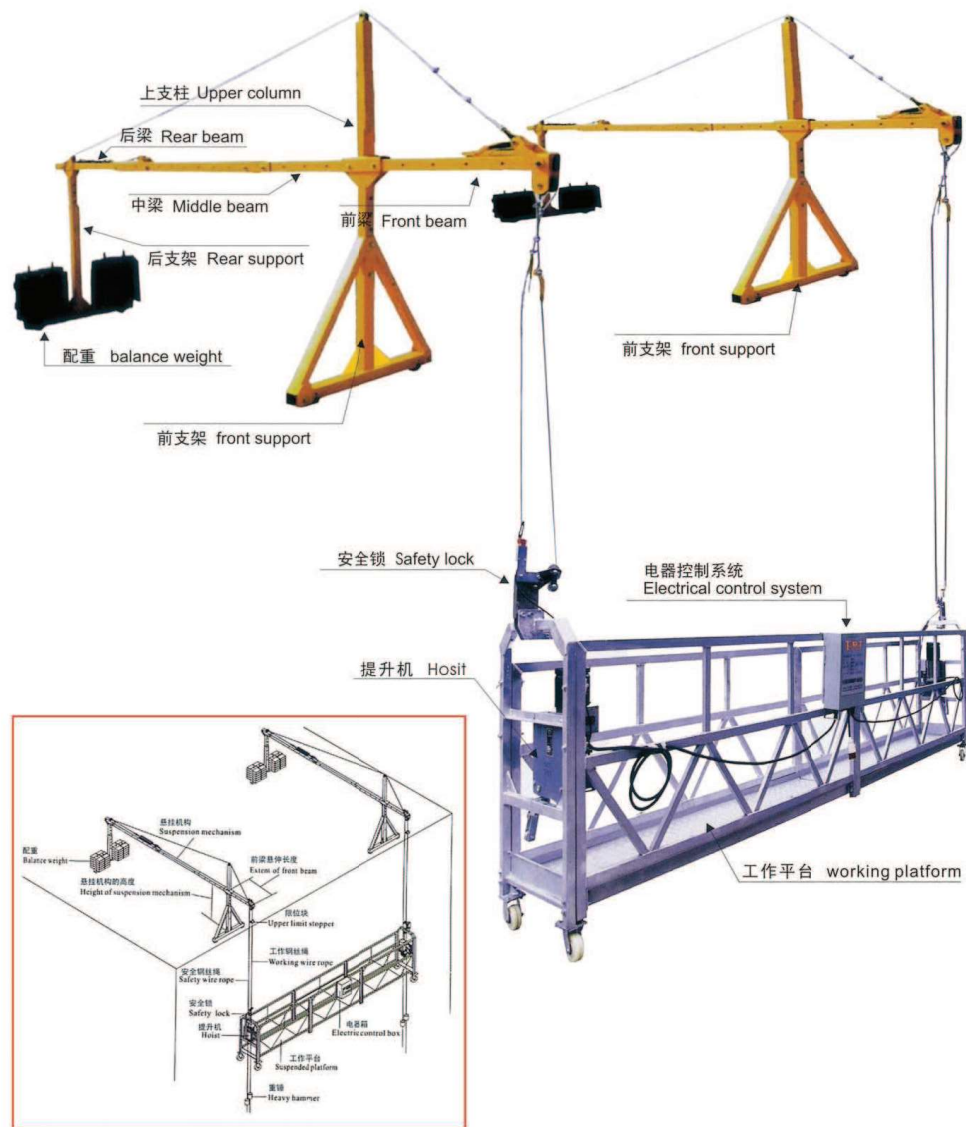

调节范围1150-1800mm，高度调节，自由伸缩的挂臂，可适用于不同高度的女儿墙和复杂面，并可根据各种特殊的工作条件，另行设计制造。

The height of the platform can be adjusted within 1150-1800mm with arm which can be stretched out and drawn back, It can be widely used parapet and complicated building in different height. And we can also supply customized platform to meet different requirement from the customers.

前梁额定伸出量
额定悬挂质量
悬伸梁底面至地面距离
前后支座最大间距

Rated Stretch of the front beam
Rated suspending load:
The distance between suspending beam and the ground:
The max distance between front support and the rear one:

1500mm
8KN x2
1200mm
4600mm

本公司除提供通用悬挂机构外，可根据各种房屋结构设计适用于特殊屋面的悬挂结构（如下图）

In addition to generalised suspending mechanism, we can also make special suspending platform in accordance with different building wall.

