

铸造三保险快速连接器

CASTING TRIPLE LOCKING QUICK HITCH COUPLER

产品特点

- 市场首创三保险设计，安全耐用，不掉斗；
- 高度低，重量轻，节约能耗；
- “补偿量”概念设计，解决挖机挂快换装车“撒土”及“挖掘力下降”的问题；
- 设计合理，产品使用寿命长，性价比高；
- 柔性触发设计，维护保养成本低；
- 轴距范围可达220-320mm，适用更多不同尺寸的挖斗等属具。

Main features

- The first triple locking designs in the current market. This design ensure safe and durable, never drop the bucket.
- Lower height, lighter weight, and saving more energy consumption.
- The concept design of "compensation volume" solves the problems of "scattering soil" and "decrease in excavation power" for user.
- Reasonable design, long service life and high cost performance.
- Flexible trigger design makes lower maintenance cost.
- The center to center distance range can be reached 220-320mm, which is suitable for more different attachment sizes.




活动钩止动保险
SLIDE JAW LOCK



后保险
REAR LOCK



前保险
FRONT LOCK

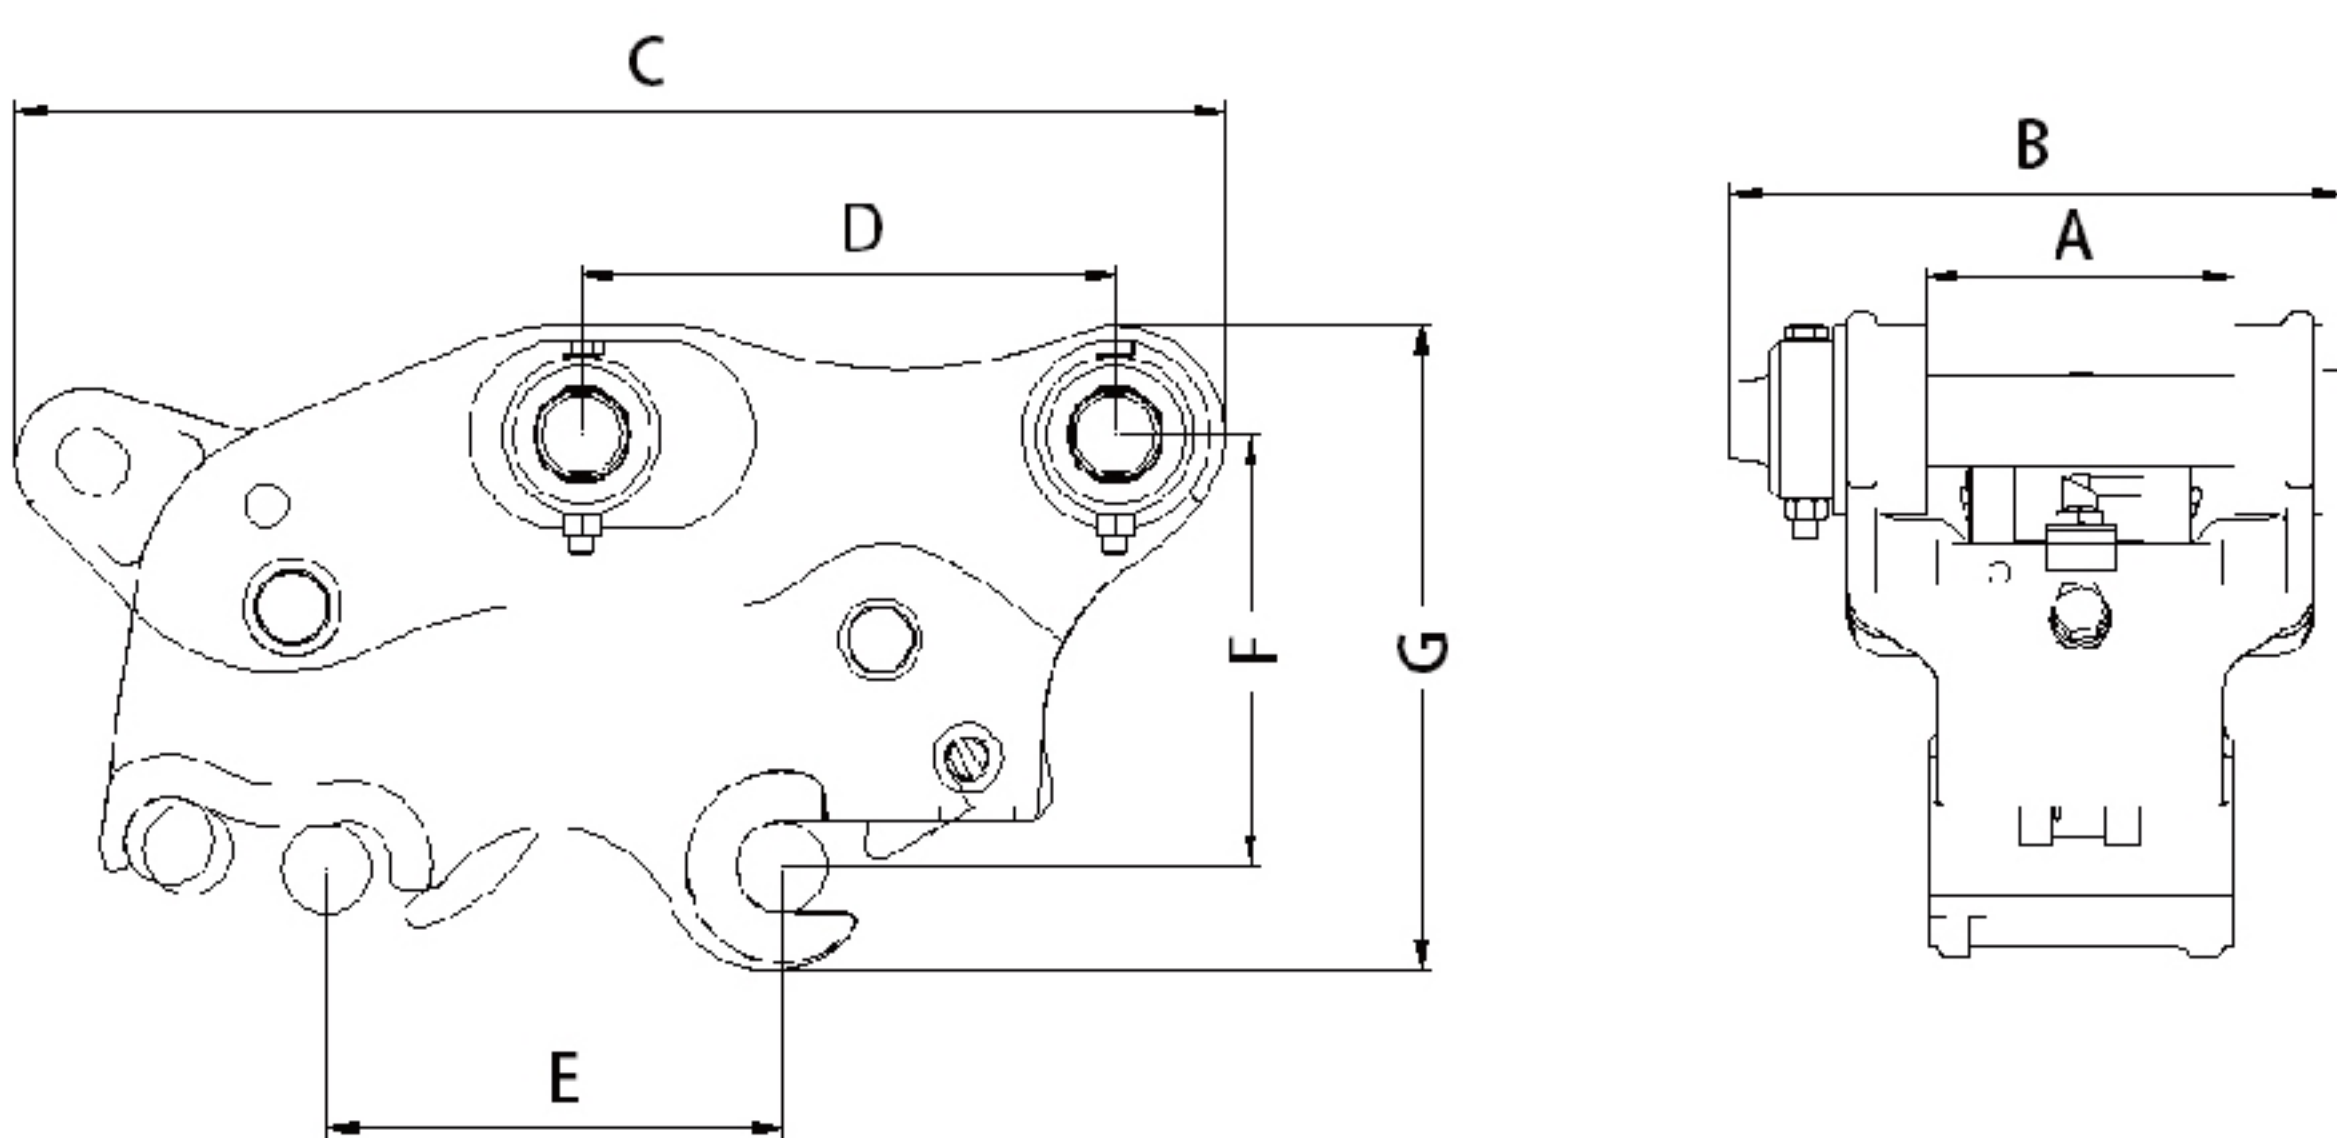

类别/ Category	Unit	JT-00	JT-01A	JT-01B	JT-02	JT-04	JT-06	JT-08
总长度 Length	mm	400	410	455	593	581-610	760	920-955
总宽度 Width	mm	240	280	295	264-270	265-283	351-454	450-483
总高度 Height	mm	185	250	258	302	318	400	512
小臂开档 Arm Open Width	mm	90-120	110-130	120-140	145-200	181-205	230-317	290-345
轴中心距 Pins Center Distance	mm	90-130	140-180	190-230	220-310	290-350	350-400	430-480
轴直径 Pin Diameter	mm	25-30	30-40	30-40	45-50	50-55	60-65	80
油缸行程 Cylinder Strok	mm	90-130	140-180	190-230	210-300	300-350	340-440	420-510
上下轴间距 Vertical Pins Center Distance	mm	90-135	100-180	170-230	180-190	200-205	240-255	300
重量 Weight	kg	24	32	37	50-75	80-110	170-210	350-390
工作压力 Working Pressure	bar	30-400	30-400	30-400	30-400	30-400	30-400	30-400
必要流量 Necessary Flow	lpm	10-20	10-20	10-20	10-20	10-20	10-20	10-20
适配挖机 Suitable Excavator	ton	0.8-2	2-4	2-4	4-6	6-9	10-16	18-25