

S系列快速连接器 S QUICK HITCH COUPLER

产品介绍

适用于挖掘机对称的快速连接器标准（S标准）是一项行业标准。S标准的主要优点是高度低、机身设计宽、重量相对较轻，尤其是与国际市场上的许多快速连接器相比，它是一种免维护连接器。

S标准是一种基于三角形的连接器，与专用支架一起确保机器驾驶员和支持人员的最高安全标准。

江土S连接器是一个安全、容易使用并与国际标准协调一致的连接器，与瑞典和北欧等国家的属具衔接顺畅。

产品特点

- “液控单向保险装置与可视性自动开关固定轴保险”两个保险保证安全性；
- S连接器结构紧凑，高度低，尽可能保持挖掘机挖掘力；
- 连接器宽度设计配适绝大多数挖机小臂和工字架宽度；
- 尺寸统一，生产高效，方便备货；
- 适合安装在液压手腕应用中的设计。



Product introduction

The S Coupler standard for excavators is an industry standard. The key benefits with the S-Standard is a low building height, wide body design, relatively low weight and especially, a maintenance-free coupler compared with many quick couplers available on the international market.

The S-Standard is a wedge based coupler that together with the dedicated Brackets assures the highest safety standards for both machine drivers and support staff.

JIANGTU S coupler is a safe, easy-to-use quick coupler that is consistent with international standards and expacially can smoothly connect with attachment from Sweden and Nordic countries.

Main features




- Hydraulic one way lock and visual auto safety switch work as two safety locks.
- The S coupler has a compact structure and low height to maintain excavator digging force as much as possible.
- S coupler width is designed to fit most excavator arm and H-link widths.
- Uniform size is friendly to produce and to stock.
- Good design for tilt-rotator.



质量为先 诚信为本 服务至上
 QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

S系列快速连接器 S QUICK HITCH COUPLER

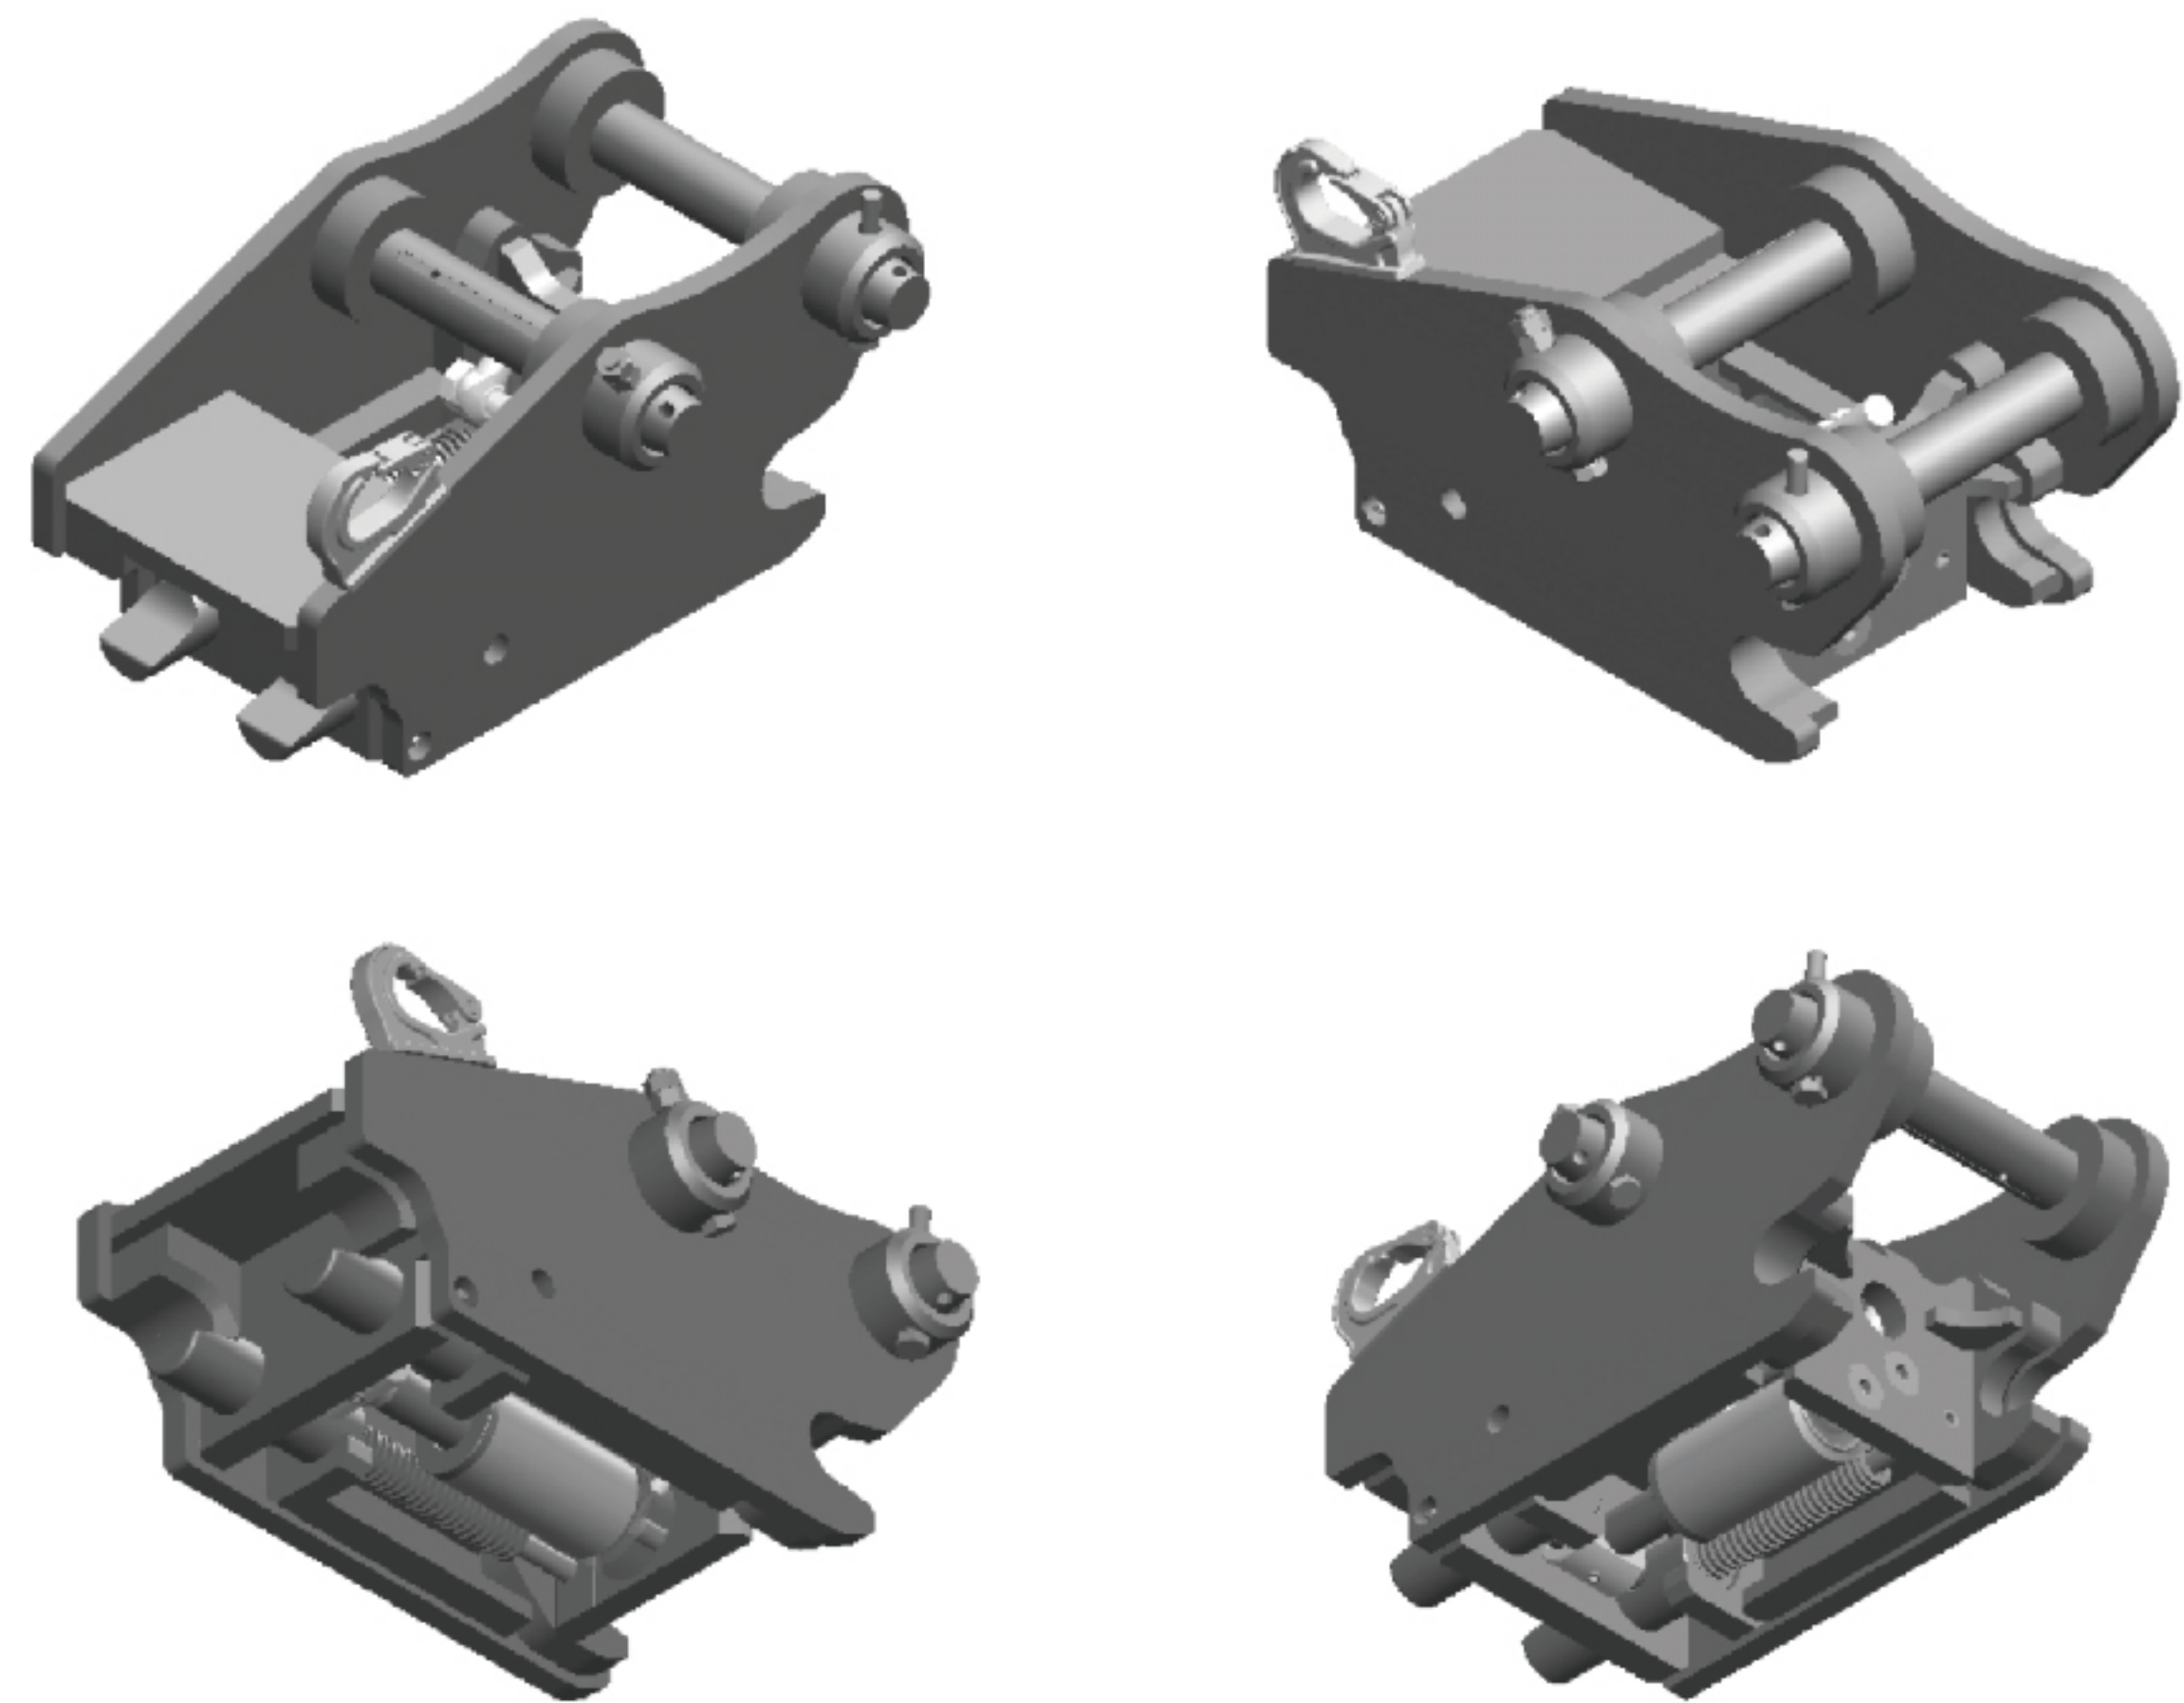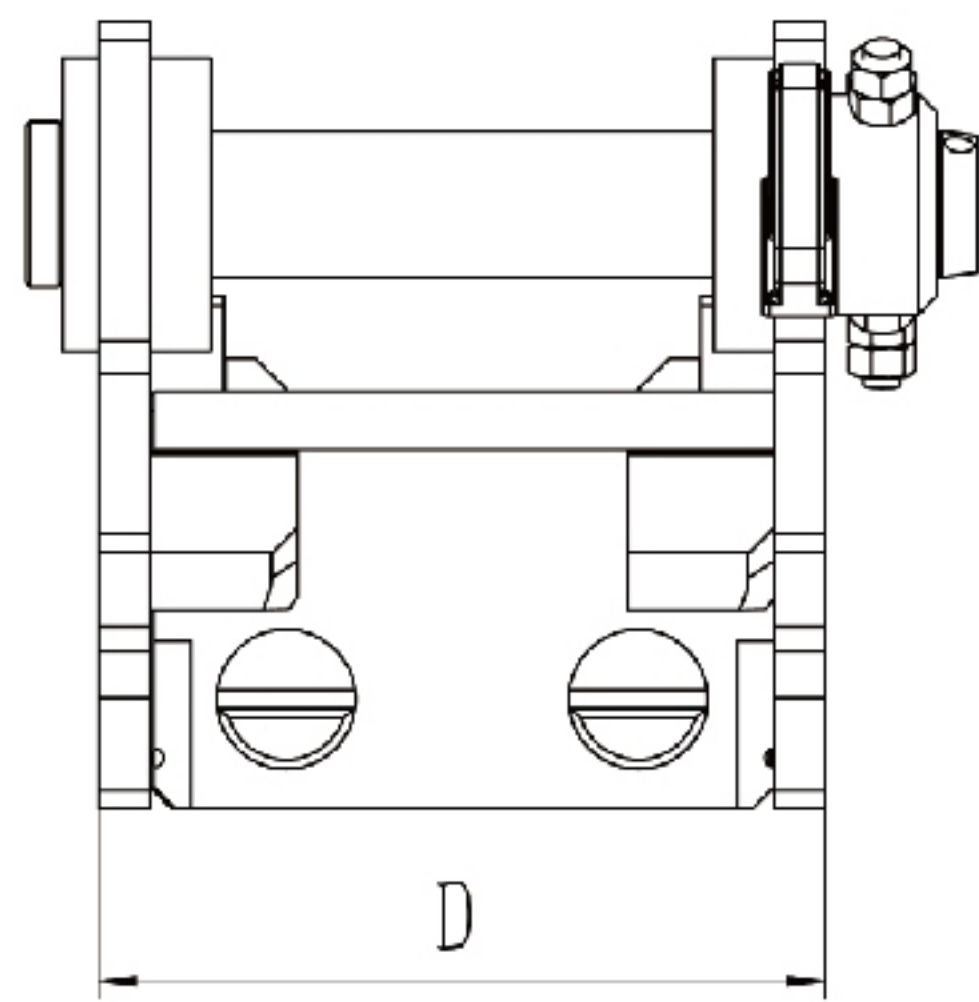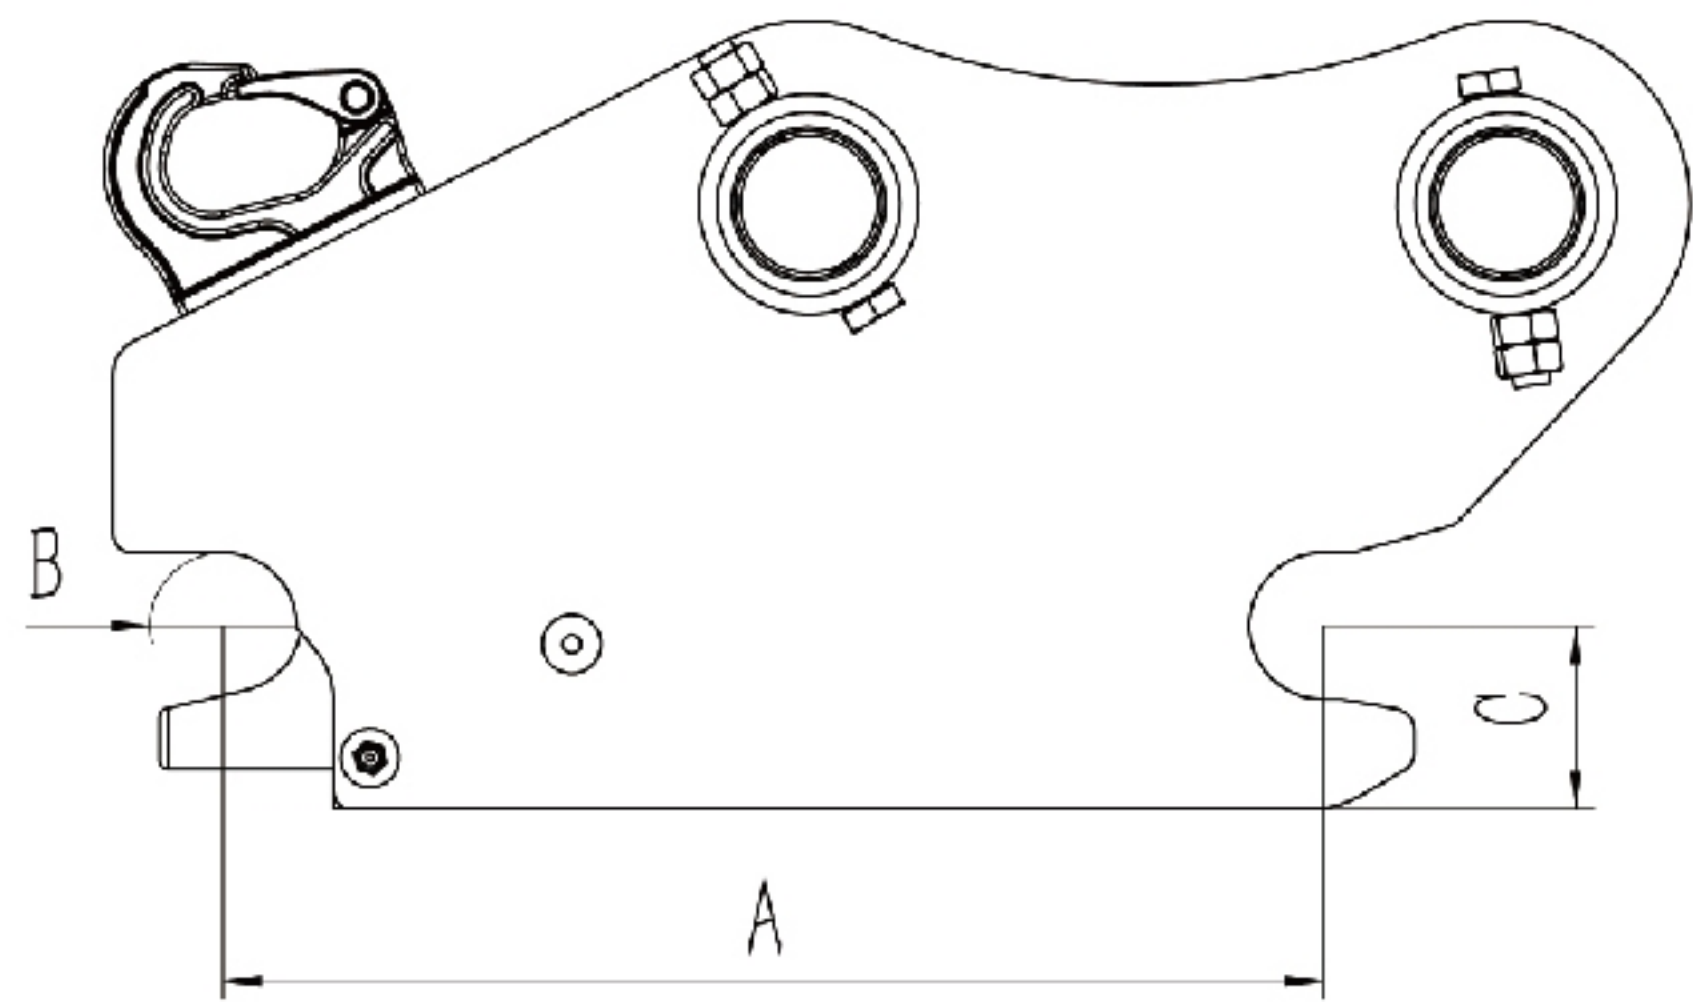

S系列液压快速连接器 S HYDRAULIC QUICK HITCH COUPLER

类别/ Category		Unit	S30/150	S30/180	S40	S40/240	S45	S50	S60	S70	S80
轴心距	A Pin Center Distance	mm	199.8 ± 0.2	229.8 ± 0.2	299.8 ± 0.2	299.8 ± 0.2	429.8 ± 0.2	429.8 ± 0.2	479.8 ± 0.2	599.8 ± 0.2	699.8 ± 0.2
轴径	B Pin diameter	mm	30	30	40	40	45	50	60	70	80
宽度	D Dipper Width	mm	148 ± 1	178 ± 1	198 ± 1	238 ± 1	288 ± 1	268 ± 1	338 ± 1	448 ± 1	588 ± 1
油压	Oil pressure	bar	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300
流量	Operating flow	lpm	15-25	15-25	15-25	15-25	15-25	15-25	15-25	15-25	15-25
适配挖机	Suitable Excavator	ton	2	2	6	7	11	11	18	30	40
设备重量	Weight	kg	27	31	41	42	88	91	170	340	435

S系列机械快速连接器 S MECHANICAL QUICK HITCH COUPLER

类别/ Category		Unit	S30/150	S30/180	S40	S40/240	S45	S50	S60	S70	S80	S90
轴心距	Pin Center Distance	mm	199.8 ± 0.2	229.8 ± 0.2	299.8 ± 0.2	299.8 ± 0.2	429.8 ± 0.2	429.8 ± 0.2	479.8 ± 0.2	599.8 ± 0.2	699.8 ± 0.2	749.8 ± 0.2
轴径	Pin diameter	mm	30	30	40	40	45	50	60	70	80	90
宽度	Dipper Width	mm	148 ± 1	178 ± 1	198 ± 1	238 ± 1	288 ± 1	268 ± 1	338 ± 1	448 ± 1	588 ± 1	748 ± 1
设备重量	Weigh	kg	27	30	41	49	84	87	155	295	410	750
适配挖机	Suitable Excavatort	ton	2	2	6	7	11	11	18	30	40	70

质量为先 诚信为本 服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com