

# CW快速连接器

## CW QUICK HITCH COUPLER

### 适用对象

CW 系列快换能在数秒内完成不同属具的切换，适合拆除作业、采石场等恶劣工况。

### 产品特点

- 采用先进技术生产；
- 耐磨且强度极高；
- 破断力与穿透力的损耗极小；
- 楔形锁紧，无间隙、更强挖掘力；
- 符合全球安全标准，断油仍能安全锁定；
- 多种版本：机械式和液压式；可旋转和可倾斜的版本。

### Applications

The CW quick hitch coupler allows attachment changes within seconds, making it ideal for demolition work, quarries, and other demanding applications.

### Main features


- Manufactured with advanced technology.
- Highly wear-resistant with exceptional strength.
- Minimal loss of breaking force and penetration power.
- Wedge-type locking system for Zero gap and stronger digging performance.
- Meets global safety standards; remains securely locked even in case of hydraulic failure.
- Available in multiple versions: mechanical and hydraulic; rotating and tilting options.



CW55






CW10

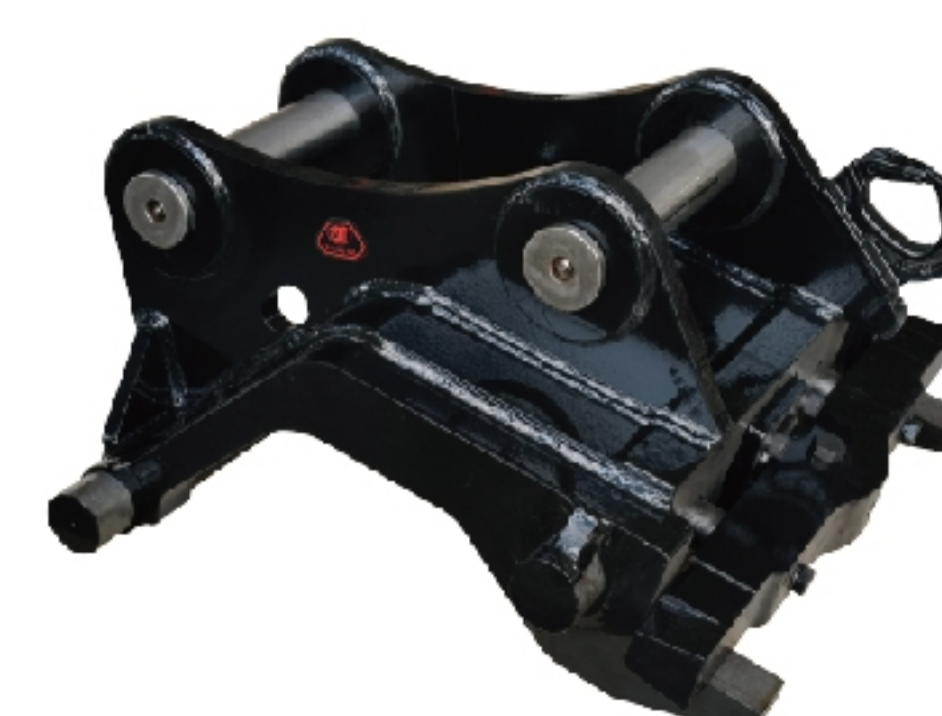

CW20



CW45

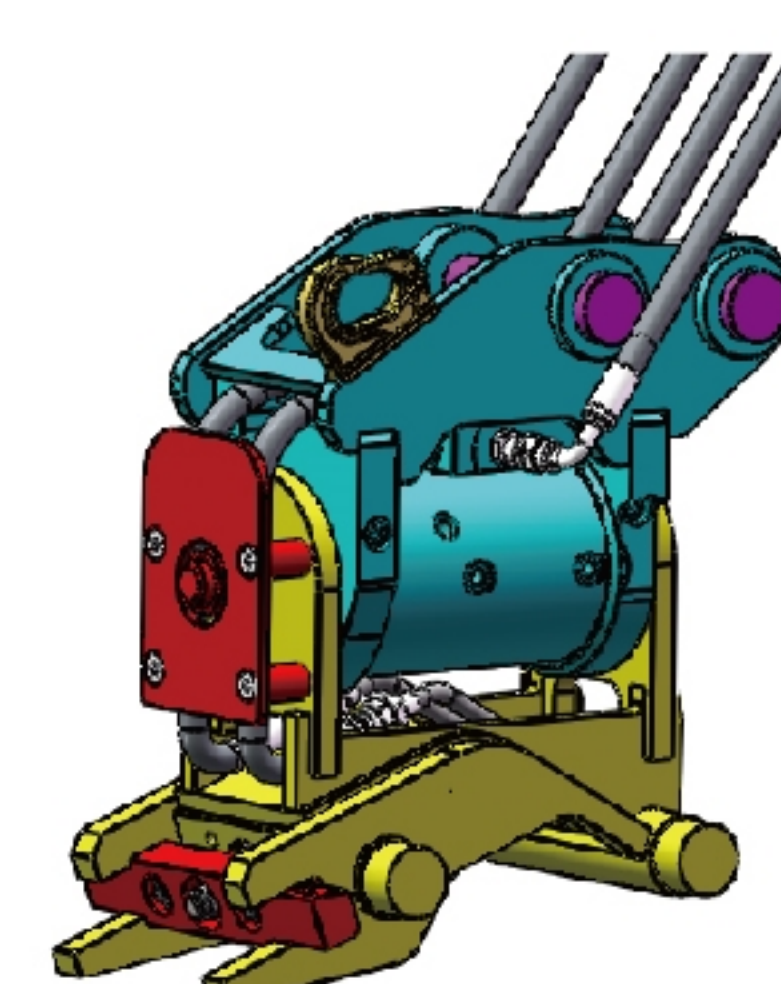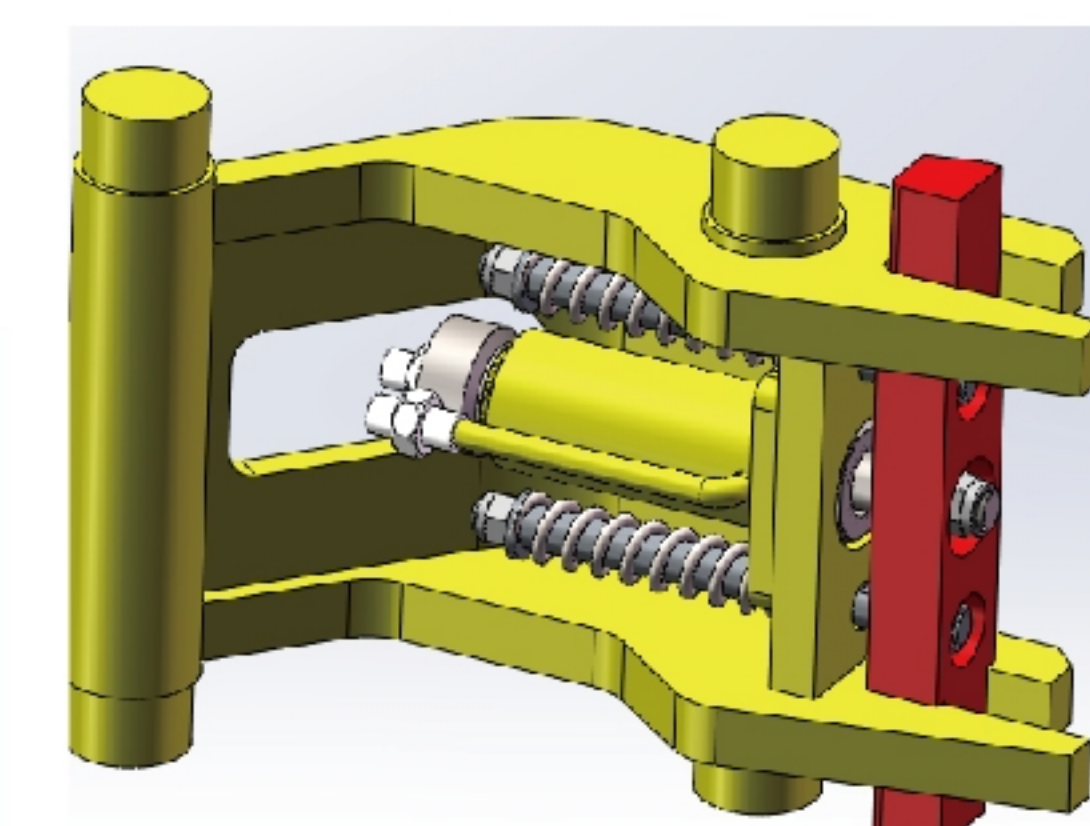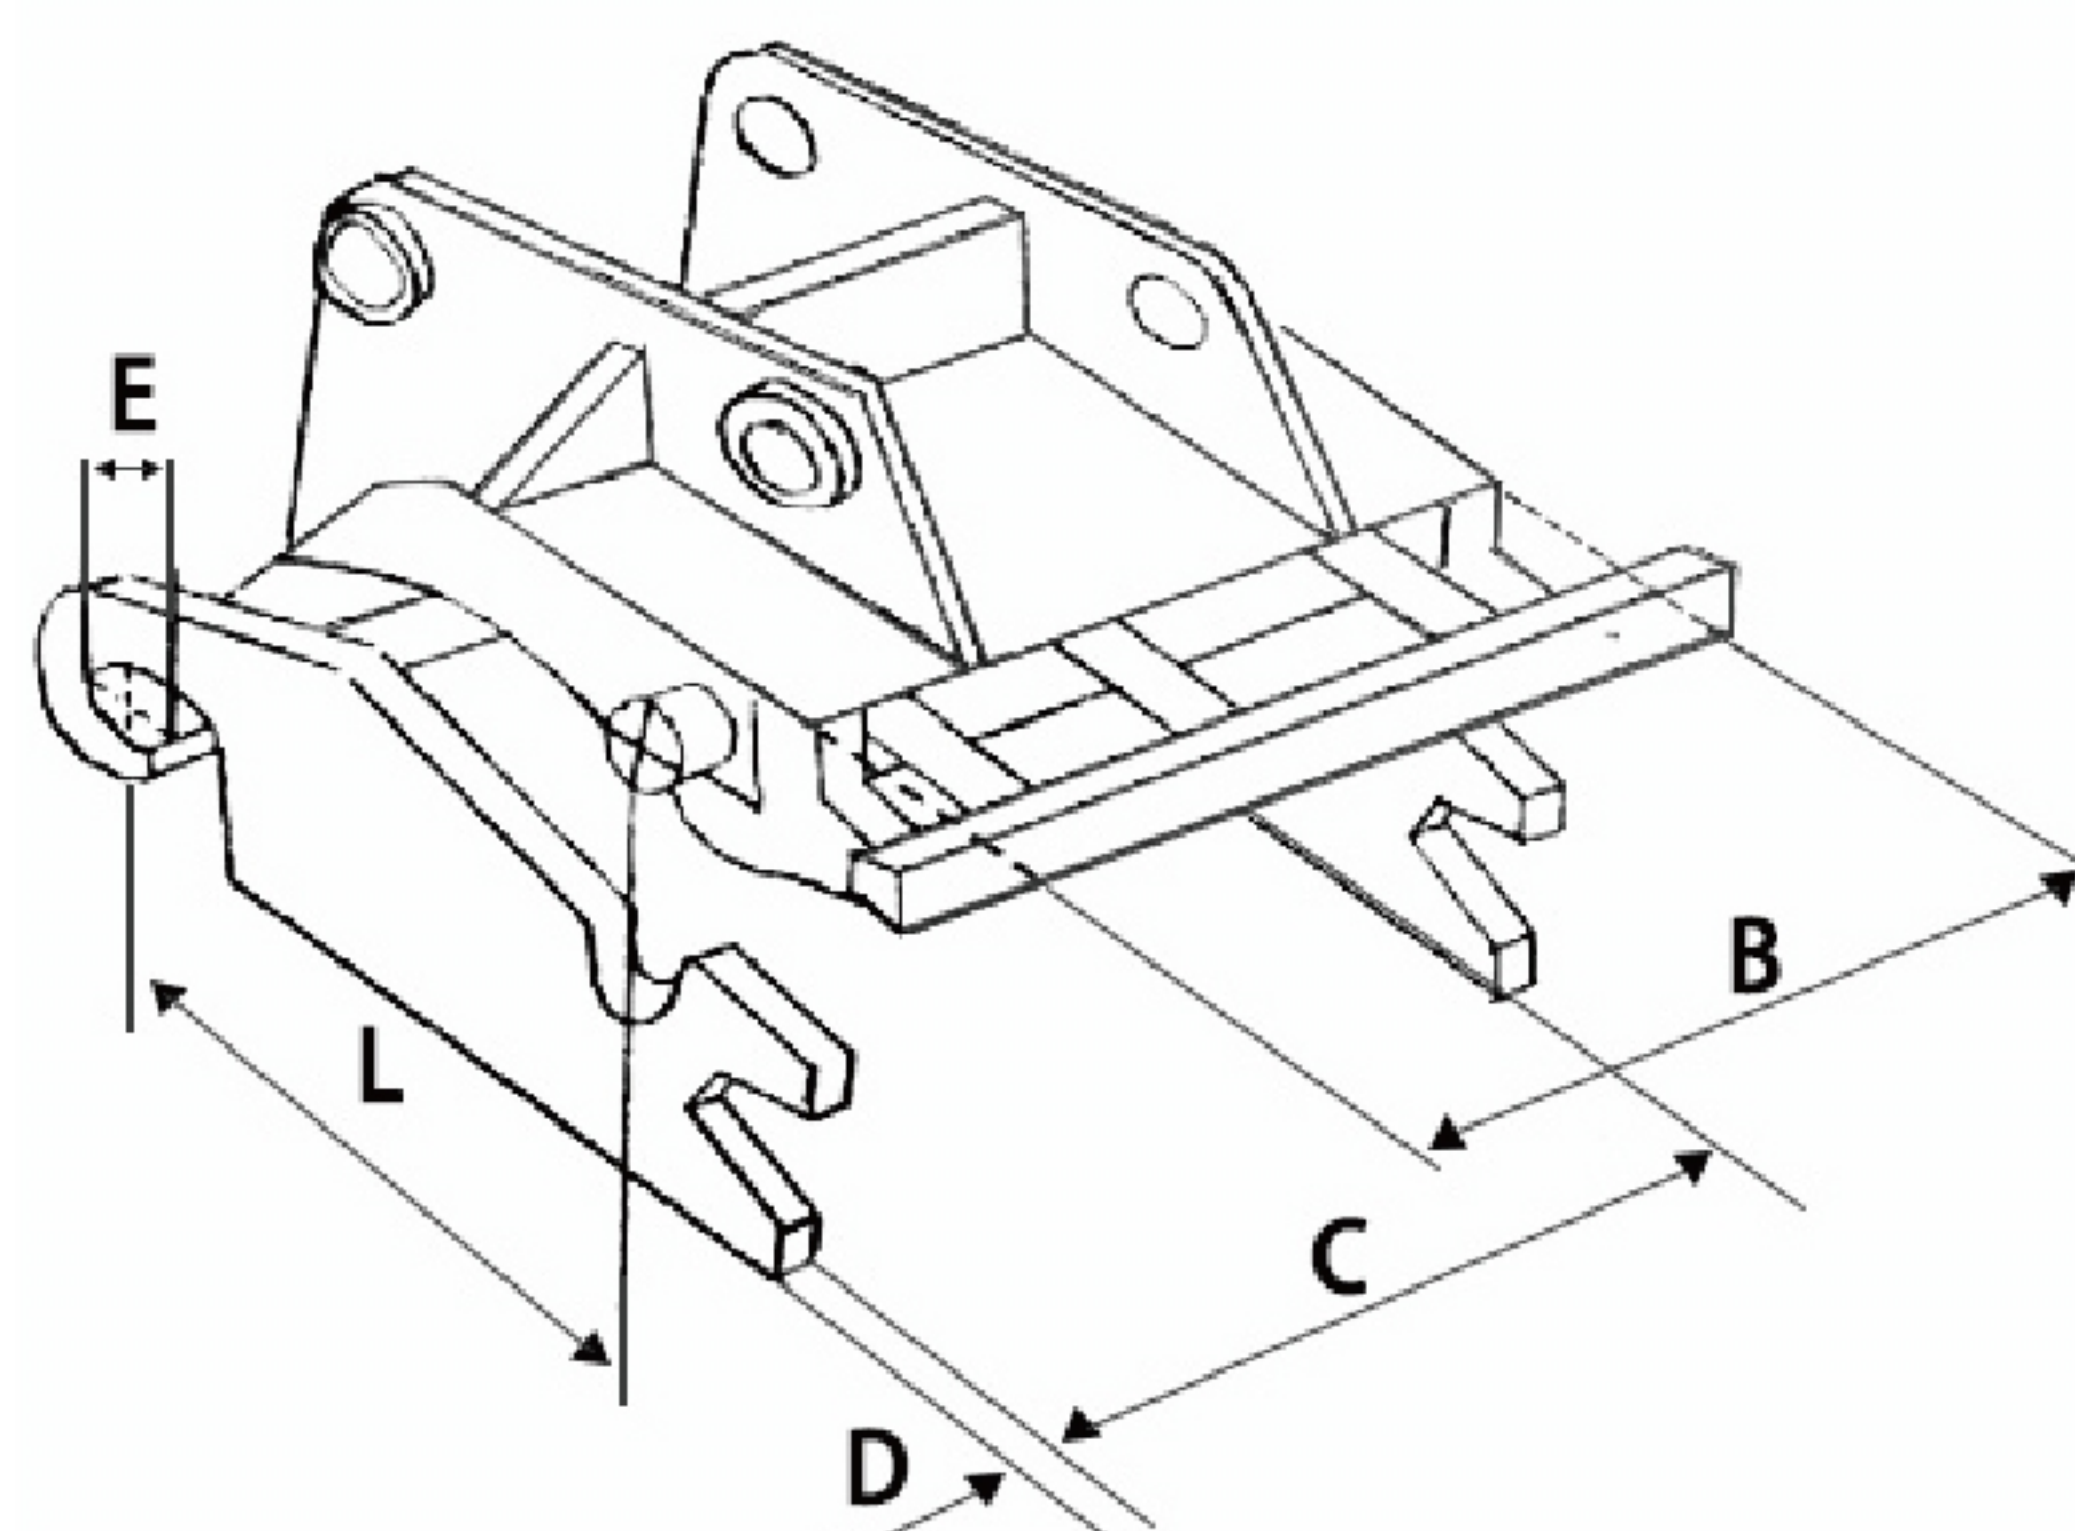

| 类别/ Category |                          | Unit | CW-00 | CW-05   | CW-10    | CW-20  | CW-20S | CW-30 | CW-30S |
|--------------|--------------------------|------|-------|---------|----------|--------|--------|-------|--------|
| 耳板内宽         | Ear Plate Inner Width(C) | mm   | 150   | 180     | 320      | 560    | 430    | 560   | 430    |
| 外部尺寸         | Outer Dimension(B)       | mm   |       | 175     | 310      | 550    | 420    | 550   | 420    |
| 耳板厚度         | Ear Plate Thickness(D)   | mm   | 15    | 20      | 25       | 30     | 30     | 35    | 35     |
| 轴中心距         | Pin Center Distance(L)   | mm   | 150   | 200     | 300      | 475    | 475    | 475   | 475    |
| 销轴直径         | Pin Diameter(E)          | mm   | 30    | 40      | 50       | 60     | 60     | 60    | 60     |
| 适配挖机         | Suitable Excavator       | ton  | 0-1   | 0.8-3.5 | 3.5-10.5 | 7.5-15 | 7.5-15 | 15-25 | 15-25  |

| 类别/ Category |                          | Unit | CW-40 | CW-40S | CW-45 | CW-45S | CW-55 | CW-55S | CW-70 | CW-100  |
|--------------|--------------------------|------|-------|--------|-------|--------|-------|--------|-------|---------|
| 耳板内宽         | Ear Plate Inner Width(C) | mm   | 560   | 430    | 700   | 560    | 845   | 575    | 860   | 1230    |
| 外部尺寸         | Outer Dimension(B)       | mm   | 550   | 420    | 690   | 550    | 830   | 560    | 840   | 1200    |
| 耳板厚度         | Ear Plate Thickness(D)   | mm   | 40    | 40     | 50    | 50     | 60    | 60     | 70    | 90      |
| 轴中心距         | Pin Center Distance(L)   | mm   | 475   | 475    | 570   | 570    | 650   | 650    | 875   | 1275    |
| 销轴直径         | Pin Diameter(E)          | mm   | 60    | 60     | 90    | 90     | 105   | 105    | 130   | 170     |
| 适配挖机         | Suitable Excavator       | ton  | 20-30 | 20-30  | 25-40 | 25-40  | 35-65 | 35-65  | 65-90 | 120-160 |