




临清市鼎泰机械有限公司

LINQING DINGTAI MACHINERY CO., LTD

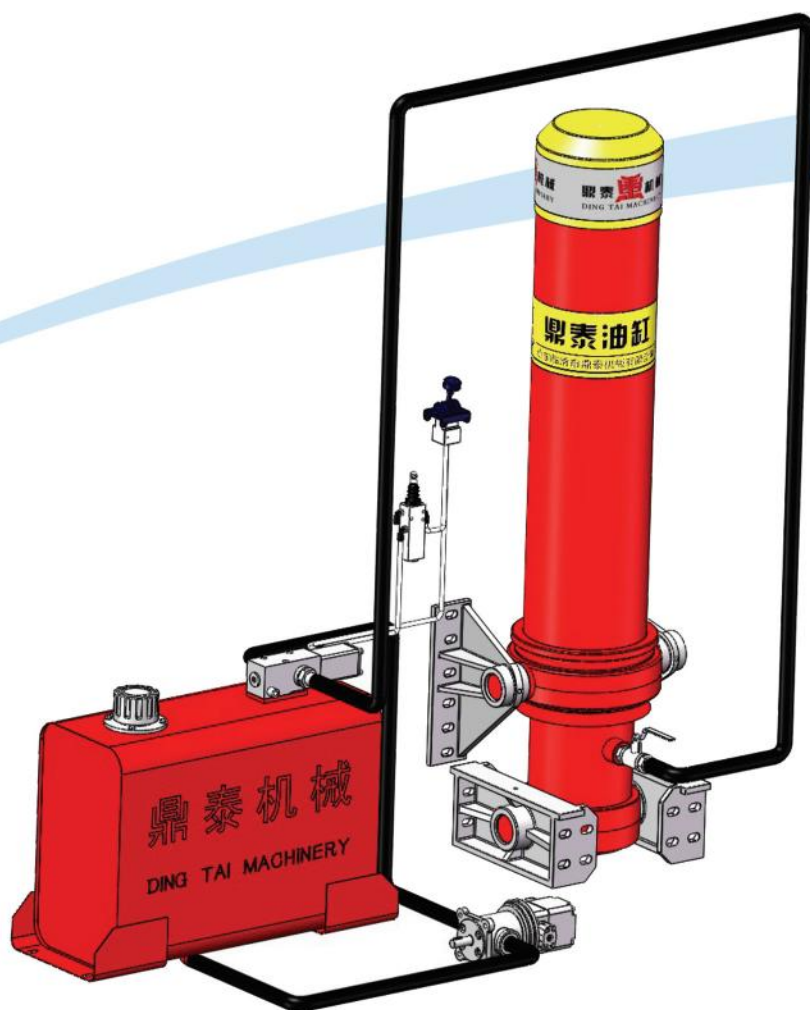

专业 · 高效 · 诚信

MAJOR · EFFICIENT · SINCERITY



企业简介

About Company

临清市鼎泰机械有限公司成立于2002年，位于临清市东外环路北首(高速路收费站南1公里)，交通便利。公司是一家致力于液压机械产品设计、研发与制造的专业设备生产企业。主导各类专用车液压油缸总成、液压系统产品。

公司占地面积100余亩。拥有深孔镗设备、冷拔生产线、试验设备、各种数控机加工机床、外圆磨床、无心磨床、焊接生产线等共计150台套。公司2003年通过ISO9001质量体系认证；2013年通过ISO / TS16949国际质量体系认证；并被评为中国质量诚信AAA级品牌企业。产品配套于陕汽、重汽、红岩等各大主机厂，质量得到广大客户的一致好评。同时在全国各地设有多家服务网点，为客户提供专业、便捷的技术支持和产品服务。

公司多年来与各大重卡企业及专用厂建立牢固的合作关系，获得用户的一致信赖。公司坚持“以产品质量求生存，以高新技术求发展，以先进管理求效益，以优质服务求信誉”的经营理念追求更先进的技术，开发更实用的产品，在立足液压机械生产主业的同时不断深化内部产品结构，开辟铸造新领域，实现企业转型发展、科学发展，并坚持以精良的品质，完善的服务，不断巩固、提升产品在市场上的占有率、满意率，向着客户利益最大化目标迈进。

Linqing dingtai machinery co.,ltd which was established in 2002 that located in north head of east outer ring, Linqing City(south of highway toll 1 km). Convenient transportation. Company is committed to research and development of hydraulic machinery design and manufacture of professional equipment manufacturing enterprises, Main all kinds of special hydraulic cylinder assembly, hydraulic system and so on.

The company covers an area of 66600 square meters. With deep hole boring equipment, Cold drawing production line, test equipment, all kinds of CNC machining, cylindrical grinder machine, centerless grinding machines, the welding line etc total of 150 sets. Annual Production capacity up to 12000 set. Company passed the ISO9001 quality system certification in 2003; through the ISO/TS1 6949 international quality system certification in 2013. And it was named China quality credit AAA enterprise brand. The products are matching with the Shacman and sinotruk refitting factory, the quality get consistent high praise, At the same time all over the country, with several service center to provide clients with professional technical support and convenient products and services.

Company established strong relationship and gain trust of users with major heavy truck and special factory in past years. Company insisted that strives for the survival by the quality of the products, with high and new technology development, with advanced management for efficiency, credibility by the high quality service " business philosophy to pursue more advanced technology, to develop more practical products, while based on the main hydraulic machinery production continuously deepen the internal structure of products, develop the new field, transform the enterprise of scientific development, and adhere to the excellent quality, perfect service, continuously consolidate promote products on the market share of satisfaction, to the customer benefit maximization goal.



3/4TG-118 \ 129 \ 137 系列 (适用于轻量化自卸车型)

1、采用高端27SiMN调质钢管，具有高抗拉强度和高屈服值，承载能力强。

2、采用专利技术结构设计，先进的生产工艺，保证产品质量稳定。

3、采用进口油封，密封性能好。

4、采用特殊设计，轻量化，举升、下降速度快。

5、采用表面镀铬处理，增加表面硬度，延长使用寿命。

1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.

2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.

3. Imported oil seal is adopted, with good sealing performance.

4. Special design, light weight, fast lifting and lowering speed.

5. Surface is chromed to increase the surface hardness and prolong the service life.



液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
3TG-E118*2650ZZ	2650	20	343	280	180	Φ 60
3TG-E118*2850ZZ	2850	20	343	280	180	Φ 60
3TG-E118*3200ZZ	3200	20	343	280	180	Φ 60


液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
3TG-E129*2650ZZ	2650	20	343	280	215	Φ 60
3TG-E129*2850ZZ	2850	20	343	280	215	Φ 60
3TG-E129*3200ZZ	3200	20	343	280	215	Φ 60
4TG-E129*3600ZZ	3600	20	343	280	215	Φ 60
4TG-E129*3850ZZ	3850	20	343	280	215	Φ 60

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
3TG-E137*2650ZZ	2650	20	343	280	215	Φ 60
3TG-E137*2850ZZ	2850	20	343	280	215	Φ 60
3TG-E137*3200ZZ	3200	20	343	280	215	Φ 60
4TG-E137*3600ZZ	3600	20	343	280	215	Φ 60
4TG-E137*3850ZZ	3850	20	343	280	215	Φ 60
4TG-E137*4280ZZ	4280	20	343	280	215	Φ 60
4TG-E137*4650ZZ	4650	20	343	280	215	Φ 60

3/4/5/6TG-149 \ 157 \ 169 \ 179 系列 (适用于渣土车自卸车型)



- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
- 2、采用专利技术结构设计，先进的生产工艺，保证产品品质稳定。
- 3、采用进口油封，密封性能好。
- 4、采用特殊设计，轻量化，举升、下降速度快。
- 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。

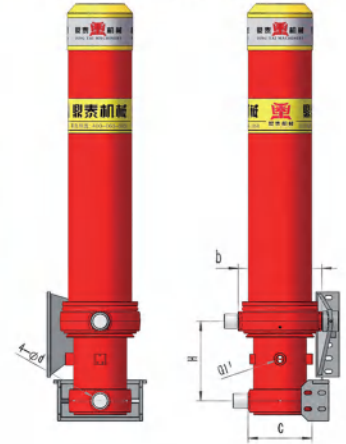

1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
3. Imported oil seal is adopted, with good sealing performance.
4. Special design, light weight, fast lifting and lowering speed.
5. Surface is chromed to increase the surface hardness and prolong the service life.

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
3TG-E149*4280ZZ	4280	20	343	340	245	Φ 60
4TG-E149*4280ZZ	4280	20	343	340	245	Φ 60
4TG-E149*4650ZZ	4650	20	343	340	245	Φ 60
4TG-E149*5180ZZ	5180	20	343	340	245	Φ 60
5TG-E149*4280ZZ	4280	20	343	340	245	Φ 60
5TG-E149*4650ZZ	4650	20	343	340	245	Φ 60
5TG-E149*5180ZZ	5180	20	343	340	245	Φ 60

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
3TG-E157*4280ZZ	4280	20	343	340	245	Φ 60
4TG-E157*4280ZZ	4280	20	343	340	245	Φ 60
4TG-E157*4650ZZ	4650	20	343	340	245	Φ 60
4TG-E157*5180ZZ	5180	20	343	340	245	Φ 60
5TG-E157*4280ZZ	4280	20	343	340	245	Φ 60
5TG-E157*4650ZZ	4650	20	343	340	245	Φ 60
5TG-E157*5180ZZ	5180	20	343	340	245	Φ 60

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
6TG-E169*4280ZZ	4280	20	343	340	245	Φ 60/ Φ 65
6TG-E169*4650ZZ	4650	20	343	340	245	Φ 60/ Φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
6TG-E179*4280ZZ	4280	20	343	340	245	Φ 60/ Φ 65
6TG-E179*4650ZZ	4650	20	343	340	245	Φ 60/ Φ 65



4/5TG-169 \ 179 \ 191 \ 202 系列 (适用于主车自卸车型)



- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
- 2、采用专利技术结构设计，先进的生产工艺，保证产品品质稳定。
- 3、采用进口油封，密封性能好。
- 4、采用特殊设计，轻量化，举升、下降速度快。
- 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。



1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
3. Imported oil seal is adopted, with good sealing performance.
4. Special design, light weight, fast lifting and lowering speed.
5. Surface is chromed to increase the surface hardness and prolong the service life.

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
4TG-E169*4280ZZ	4280	20	343	340	245	Φ 60/ Φ 65
4TG-E169*4650ZZ	4650	20	343	340	245	Φ 60/ Φ 65
4TG-E169*5180ZZ	5180	20	343	340	245	Φ 65
4TG-E169*5390ZZ	5390	20	343	340	245	Φ 65
4TG-E169*5700ZZ	5700	20	343	340	245	Φ 65
4TG-E169*6180ZZ	6180	20	343	340	245	Φ 65
5TG-E169*4280ZZ	4280	20	343	340	245	Φ 60/ Φ 65
5TG-E169*4650ZZ	4650	20	343	340	245	Φ 60/ Φ 65
5TG-E169*5180ZZ	5180	20	343	340	245	Φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
4TG-E179*4280ZZ	4280	20	343	340	245	Φ 60/ Φ 65
4TG-E179*4650ZZ	4650	20	343	340	245	Φ 60/ Φ 65
4TG-E179*5180ZZ	5180	20	343	340	245	Φ 65
4TG-E179*5390ZZ	5390	20	343	340	245	Φ 65
4TG-E179*5700ZZ	5700	20	343	340	245	Φ 65
4TG-E179*6180ZZ	6180	20	343	340	245	Φ 65
5TG-E179*4280ZZ	4280	20	343	340	245	Φ 60/ Φ 65
5TG-E179*4650ZZ	4650	20	343	340	245	Φ 60/ Φ 65
5TG-E179*5180ZZ	5180	20	343	340	245	Φ 65


液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
4TG-E191*4650ZZ	4650	20	343	360	245/275	Φ 65
4TG-E191*5390ZZ	5390	20	343	360	245/275	Φ 65
4TG-E191*5700ZZ	5700	20	343	360	245/275	Φ 65
4TG-E191*6180ZZ	6180	20	343	360	245/275	Φ 65
4TG-E191*6350ZZ	6350	20	343	360	245/275	Φ 65
5TG-E191*5390ZZ	5390	20	343	360	245/275	Φ 65
5TG-E191*5700ZZ	5700	20	343	360	245/275	Φ 65
5TG-E191*6180ZZ	6180	20	343	360	245/275	Φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
4TG-E202*4650ZZ	4650	20	343	360	275	Φ 65
4TG-E202*5390ZZ	5390	20	343	360	275	Φ 65
4TG-E202*5700ZZ	5700	20	343	360	275	Φ 65
4TG-E202*6180ZZ	6180	20	343	360	275	Φ 65
4TG-E202*6350ZZ	6350	20	343	360	275	Φ 65
5TG-E202*5390ZZ	5390	20	343	360	275	Φ 65
5TG-E202*5700ZZ	5700	20	343	360	275	Φ 65
5TG-E202*6180ZZ	6180	20	343	360	275	Φ 65

5TG-191 \ 202 \ 214 \ 240 系列 (适用于半挂自卸车型)



- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
 - 2、采用专利技术结构设计，先进的生产工艺，保证产品品质稳定。
 - 3、采用进口油封，密封性能好。
 - 4、采用特殊设计，轻量化，举升、下降速度快。
 - 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。
1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
 2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
 3. Imported oil seal is adopted, with good sealing performance.
 4. Special design, light weight, fast lifting and lowering speed.
 5. Surface is chromed to increase the surface hardness and prolong the service life.

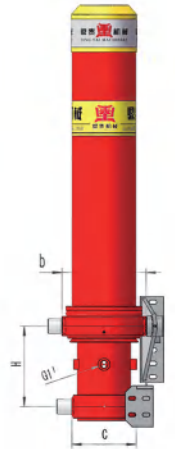

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
5TG-E191*6180ZZ	6180	20	343	360	275	Φ 65
5TG-E191*6500ZZ	6500	20	343	360	275	Φ 65
5TG-E191*6800ZZ	6800	20	343	360	275	Φ 65
5TG-E191*7300ZZ	7300	20	343	360	275	Φ 65
5TG-E191*7800ZZ	7800	20	343	360	275	Φ 65


液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
5TG-E202*6180ZZ	6180	20	343	360	275	Φ 65
5TG-E202*6500ZZ	6500	20	343	360	275	Φ 65
5TG-E202*6800ZZ	6800	20	343	360	275	Φ 65
5TG-E202*7300ZZ	7300	20	343	360	275	Φ 65
5TG-E202*7800ZZ	7800	20	343	360	275	Φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
5TG-E214*6500ZZ	6500	20	343	360	280	Φ 65
5TG-E214*6800ZZ	6800	20	343	360	280	Φ 65
5TG-E214*7300ZZ	7300	20	343	360	280	Φ 65
5TG-E214*7800ZZ	7800	20	343	360	280	Φ 65
5TG-E214*8130ZZ	8130	20	343	360	280	Φ 65
5TG-E214*8500ZZ	8500	20	343	360	280	Φ 65
5TG-E214*9130ZZ	9130	20	343	360	280	Φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
5TG-E240*6500ZZ	6500	20	486	420	342	Φ 75
5TG-E240*6800ZZ	6800	20	486	420	342	Φ 75
5TG-E240*7300ZZ	7300	20	486	420	342	Φ 75
5TG-E240*7800ZZ	7800	20	486	420	342	Φ 75
5TG-E240*8130ZZ	8130	20	486	420	342	Φ 75
5TG-E240*8500ZZ	8500	20	486	420	342	Φ 75
5TG-E240*9130ZZ	9130	20	486	420	342	Φ 75



6TG-191 \ 202 系列 (适用于半挂篷车自卸车型)

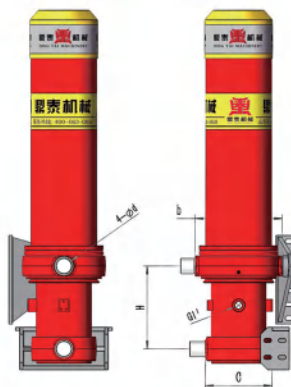


- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
- 2、采用专利技术结构设计，先进的生产工艺，保证产品品质稳定。
- 3、采用进口油封，密封性能好。
- 4、采用特殊设计，轻量化，举升、下降速度快。
- 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。

1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
3. Imported oil seal is adopted, with good sealing performance.
4. Special design, light weight, fast lifting and lowering speed.
5. Surface is chromed to increase the surface hardness and prolong the service life.



液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	φ d (mm)
6TG-E191*4280ZZ	4280	20	343	360	275	φ 65
6TG-E191*4650ZZ	4650	20	343	360	275	φ 65
6TG-E191*5180ZZ	5180	20	343	360	275	φ 65
6TG-E191*5390ZZ	5390	20	343	360	275	φ 65
6TG-E191*5700ZZ	5700	20	343	360	275	φ 65
6TG-E191*6180ZZ	6180	20	343	360	275	φ 65
6TG-E191*6500ZZ	6500	20	343	360	275	φ 65
6TG-E191*6800ZZ	6800	20	343	360	275	φ 65
6TG-E191*7300ZZ	7300	20	343	360	275	φ 65
6TG-E191*7800ZZ	7800	20	343	360	275	φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	φ d (mm)
6TG-E202*4280ZZ	4280	20	343	360	275	φ 65
6TG-E202*4650ZZ	4650	20	343	360	275	φ 65
6TG-E202*5180ZZ	5180	20	343	360	275	φ 65
6TG-E202*5390ZZ	5390	20	343	360	275	φ 65
6TG-E202*5700ZZ	5700	20	343	360	275	φ 65
6TG-E202*6180ZZ	6180	20	343	360	275	φ 65
6TG-E202*6500ZZ	6500	20	343	360	275	φ 65
6TG-E202*6800ZZ	6800	20	343	360	275	φ 65
6TG-E202*7300ZZ	7300	20	343	360	275	φ 65
6TG-E202*7800ZZ	7800	20	343	360	275	φ 65

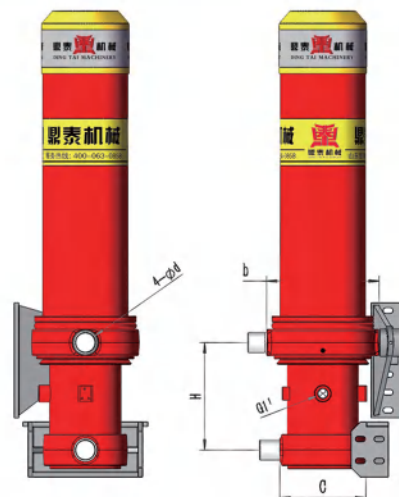

7TG-191 \ 202 系列 (适用于骨架后翻自卸车型)

- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
 - 2、采用专利技术结构设计，先进的生产工艺，保证产品质量稳定。
 - 3、采用进口油封，密封性能好。
 - 4、采用特殊设计，轻量化，举升、下降速度快。
 - 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。
1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
 2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
 3. Imported oil seal is adopted, with good sealing performance.
 4. Special design, light weight, fast lifting and lowering speed.
 5. Surface is chromed to increase the surface hardness and prolong the service life.


液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	φ d (mm)
7TG-E191*4300ZZ	4300	20	343	360	275	φ 65
7TG-E191*4800ZZ	4800	20	343	360	275	φ 65
7TG-E191*5180ZZ	5180	20	343	360	275	φ 65
7TG-E191*5390ZZ	5390	20	343	360	275	φ 65
7TG-E191*5700ZZ	5700	20	343	360	275	φ 65
7TG-E191*6180ZZ	6180	20	343	360	275	φ 65
7TG-E191*6500ZZ	6500	20	343	360	275	φ 65
7TG-E191*6800ZZ	6800	20	343	360	275	φ 65
7TG-E191*7300ZZ	7300	20	343	360	275	φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	φ d (mm)
7TG-E202*4300ZZ	4300	20	343	360	275	φ 65
7TG-E202*4800ZZ	4800	20	343	360	275	φ 65
7TG-E202*5180ZZ	5180	20	343	360	275	φ 65
7TG-E202*5390ZZ	5390	20	343	360	275	φ 65
7TG-E202*5700ZZ	5700	20	343	360	275	φ 65
7TG-E202*6180ZZ	6180	20	343	360	275	φ 65
7TG-E202*6500ZZ	6500	20	343	360	275	φ 65
7TG-E202*6800ZZ	6800	20	343	360	275	φ 65
7TG-E202*7300ZZ	7300	20	343	360	275	φ 65




4TG-191 系列 (适用于矿用自卸车型)

- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
 - 2、采用专利技术结构设计，先进的生产工艺，保证产品品质稳定。
 - 3、采用进口油封，密封性能好。
 - 4、采用特殊设计，轻量化，举升、下降速度快。
 - 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。
1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
 2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
 3. Imported oil seal is adopted, with good sealing performance.
 4. Special design, light weight, fast lifting and lowering speed.
 5. Surface is chromed to increase the surface hardness and prolong the service life.

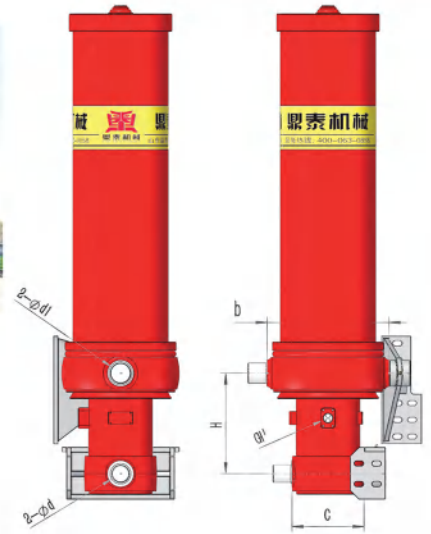

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	c (mm)	Φ d (mm)
4TG-E191*4805ZZ	4805	20	343	415	245	Φ 70
4TG-E191*5060ZZ	5060	20	343	415	245	Φ 70
4TG-E191*5325ZZ	5325	20	343	415	245	Φ 70

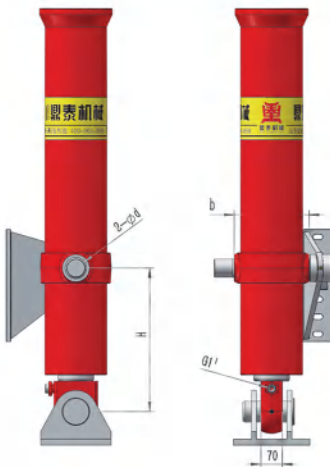

3TG-118 \ 129 系列 (倒置缸)


- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
 - 2、采用专利技术结构设计，先进的生产工艺，保证产品品质稳定。
 - 3、采用进口油封，密封性能好。
 - 4、采用特殊设计，轻量化，举升、下降速度快。
 - 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。
1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
 2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
 3. Imported oil seal is adopted, with good sealing performance.
 4. Special design, light weight, fast lifting and lowering speed.
 5. Surface is chromed to increase the surface hardness and prolong the service life.

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	Φ d (mm)
3TG-E118*2850ZZ	2850	20	343	180	Φ 60
3TG-E118*3200ZZ	3200	20	343	180	Φ 60

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	b (mm)	Φ d (mm)
3TG-E129*2850ZZ	2850	20	343	215	Φ 60
3TG-E129*3200ZZ	3200	20	343	215	Φ 60

3/4/5TG-137 \ 157 \ 179 \ 202 \ 169 \ 191 \ 214系列 (下铰轴上吊耳油缸)

- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
- 2、采用专利技术结构设计，先进的生产工艺，保证产品品质稳定。
- 3、采用进口油封，密封性能好。
- 4、采用特殊设计，轻量化，举升、下降速度快。
- 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。
1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
3. Imported oil seal is adopted, with good sealing performance.
4. Special design, light weight, fast lifting and lowering speed.
5. Surface is chromed to increase the surface hardness and prolong the service life.

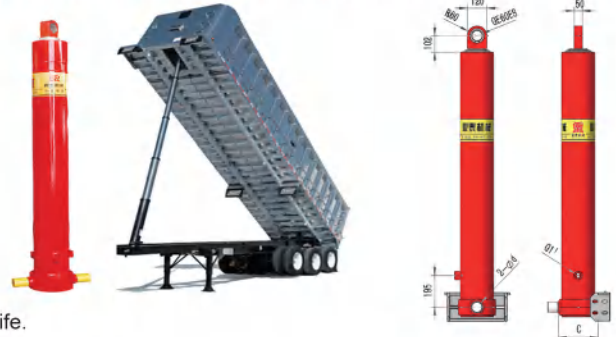

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	c (mm)	Φ d (mm)
3TG-E137*4280ZE	4280	20	343	215	Φ 60
4TG-E137*4280ZE	4280	20	343	215	Φ 60
4TG-E137*4650ZE	4650	20	343	215	Φ 60

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	c (mm)	Φ d (mm)
3TG-E157*4280ZE	4280	20	343	245	Φ 60
4TG-E157*4280ZE	4280	20	343	245	Φ 60
4TG-E157*4650ZE	4650	20	343	245	Φ 60
4TG-E157*5180ZE	5180	20	343	245	Φ 60
4TG-E157*5390ZE	5390	20	343	245	Φ 60

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	c (mm)	Φ d (mm)
4TG-E179*5580ZE	5580	20	343	275	Φ 65
4TG-E179*5780ZE	5780	20	343	275	Φ 65
4TG-E179*6180ZE	6180	20	343	275	Φ 65
5TG-E179*6180ZE	6180	20	343	275	Φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	c (mm)	Φ d (mm)
5TG-E202*5580ZE	5580	20	343	275	Φ 65
5TG-E202*5780ZE	5780	20	343	275	Φ 65
5TG-E202*6180ZE	6180	20	343	275	Φ 65
5TG-E202*6230ZE	6230	20	343	275	Φ 65
5TG-E202*6995ZE	6995	20	343	275	Φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	c (mm)	Φ d (mm)
4TG-E169*5580ZE	5580	20	343	275	Φ 65
4TG-E169*5780ZE	5780	20	343	275	Φ 65
4TG-E169*6180ZE	6180	20	343	275	Φ 65
5TG-E169*6180ZE	6180	20	343	275	Φ 65

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	c (mm)	Φ d (mm)
4TG-E191*5580ZE	5580	20	343	275	Φ 65
4TG-E191*5780ZE	5780	20	343	275	Φ 65
4TG-E191*6180ZE	6180	20	343	275	Φ 65
5TG-E191*5580ZE	5580	20	343	275	Φ 65
5TG-E191*5780ZE	5780	20	343	275	Φ 65
5TG-E191*6180ZE	6180	20	343	275	Φ 65
5TG-E191*6230ZE	6230	20	343	275	Φ 65
5TG-E191*6995ZE	6995	20	343	275	Φ 65


液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	H (mm)	c (mm)	Φ d (mm)
5TG-E214*5580ZE	5580	20	343	275	Φ 65
5TG-E214*5780ZE	5780	20	343	275	Φ 65
5TG-E214*6180ZE	6180	20	343	275	Φ 65
5TG-E214*6230ZE	6230	20	343	275	Φ 65
5TG-E214*6995ZE	6995	20	343	275	Φ 65



鼎泰机械
DING TAI MACHINERY

好油缸·鼎泰造

侧翻式液压缸 Turned on side cylinder

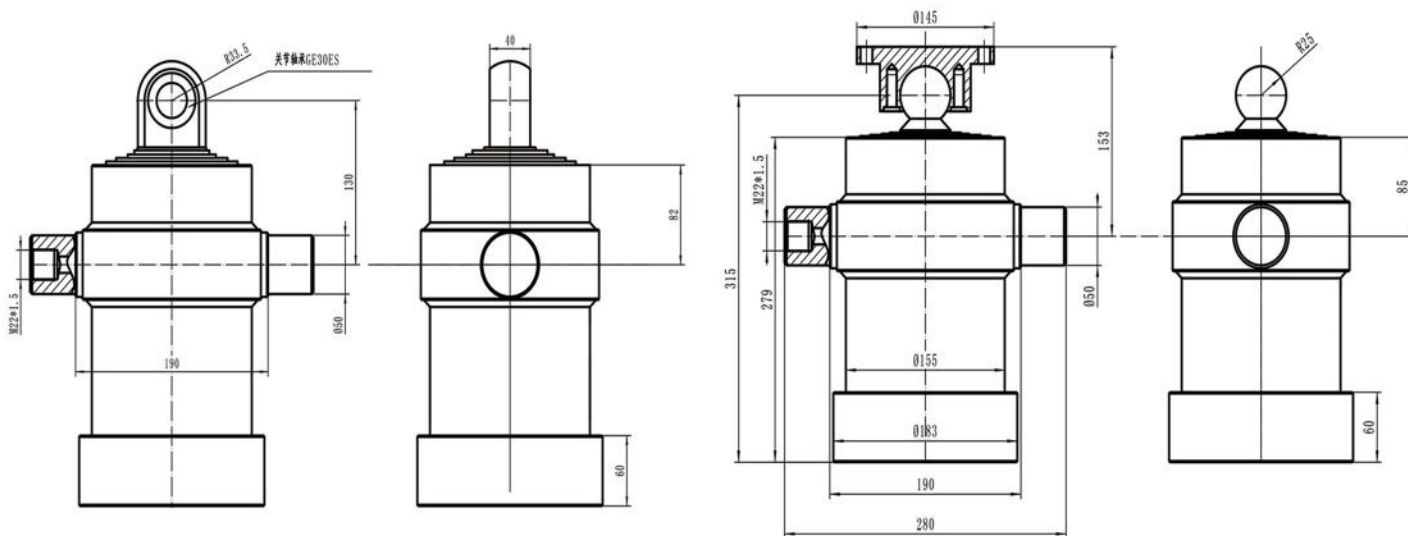


序号 NO.	型号 MODEL	第一节缸径 BORE DIAMETER (mm)	行程 STROKE (mm)	工作压力 WORKING PRESSURE (MPa)	油口尺寸 OIL PORT SIZE (mm)
1	3TG-110*750ZE	110	750	16	M22*1.5
2	4TG-110*750ZE	110	750	16	M22*1.5
3	4TG-120*750ZE	120	750	16	M22*1.5
4	5TG-120*750ZE	120	750	16	M22*1.5
5	4TG-130*800ZE	130	800	16	M22*1.5
6	5TG-130*800ZE	130	800	16	M22*1.5
7	5TG-130*800ZQ	130	800	16	M22*1.5
8	4TG-150*800ZE	150	800	16	M22*1.5
9	5TG-150*800ZE	150	800	16	M22*1.5



双耳伸缩式液压缸


Double ear lifting telescopic hydraulic cylinder

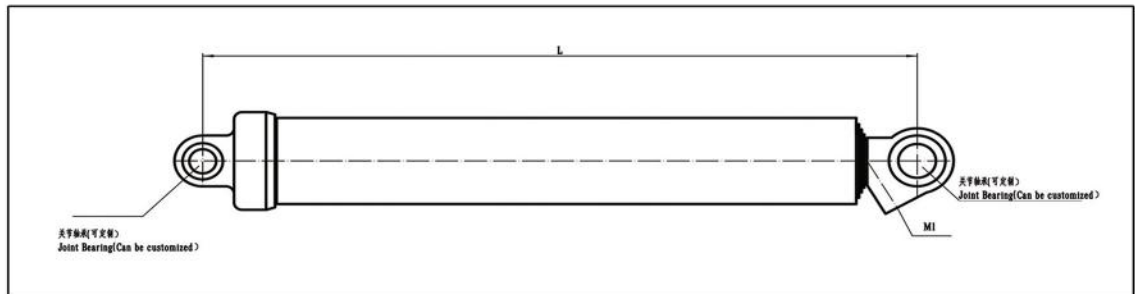

液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	L (mm)	M1
4TG-E130*3800EE	3800	16	1325	M27*2
4TG-E150*3800EE	3800	16	1325	M27*2
3TG-E240*6600EE	6600	16	2058	G1''

中举升伸缩式液压缸

Medium lift telescopic hydraulic cylinder

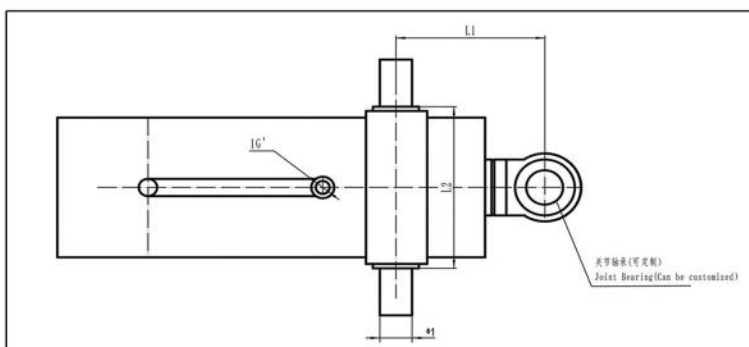


液压缸型号 Hydraulic cylinder type	行程 Stroke (mm)	额定压力 Rated Pressure (MPa)	L1 (mm)	L2 (mm)	Φ1 (mm)	M1
5TG-E200*3000ZE	3000	16	290	280	Φ65	G1''
6TG-E290*4300ZE	4300	16	342	376	Φ80	G1''





FQ-129/149/169/191 系列


- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
 - 2、采用专利技术结构设计，先进的生产工艺，保证产品品质稳定。
 - 3、采用进口油封，密封性能好。
 - 4、采用特殊设计，轻量化，举升、下降速度快。
 - 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。
1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
 2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
 3. Imported oil seal is adopted, with good sealing performance.
 4. Special design, light weight, fast lifting and lowering speed.
 5. Surface is chromed to increase the surface hardness and prolong the service life.

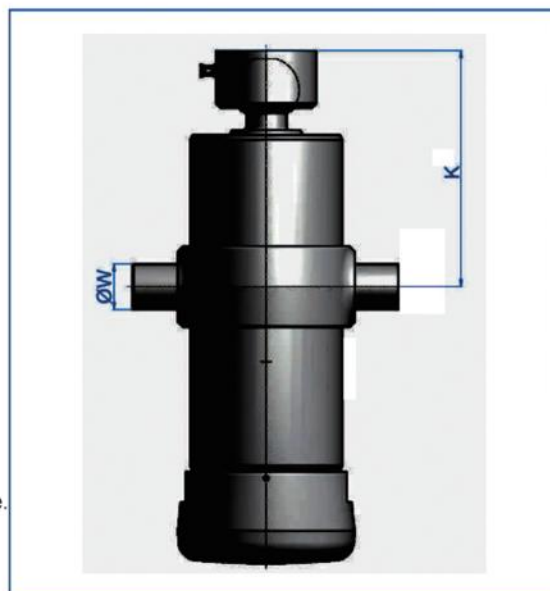

型号 TYPE	举重 Lifting weight (T)	ØR(mm)	K(mm)
FQ 129-3-0700	15-21	45	318
FQ 129-4-1020	12-20	45	205
FQ 129-4-1500	11-20	45	205
FQ 129-5-1480	6-17	45	192
FQ 129-5-1880	6-17	45	192
FQ 149-4-1500	18-28	50	265
FQ 149-5-1280	12-23	50	258
FQ 149-5-1480	12-23	50	258
FQ 149-5-1880	11-23	50	258
FQ 149-6-1780	6-17	50	245
FQ 169-5-1480	19-29	50	265
FQ 169-5-1880	18-28	50	265
FQ 169-6-1780	12-23	50	258
FQ 169-6-2260	13-25	50	258
FQ 169-7-1800	7-17	50	245
FQ 169-7-2360	7-19	50	245
FQ 191-6-1780	19-34	60	270
FQ 191-7-1880	12-28	60	278
FQ 191-8-2380	7-22	60	278

DFQ-149/169/191/214 系列

- 1、采用高端27SiMn调质钢管，具有高抗拉强度和高屈服值，承载能力强。
 - 2、采用专利技术结构设计，先进的生产工艺，保证产品品质稳定。
 - 3、采用进口油封，密封性能好。
 - 4、采用特殊设计，轻量化，举升、下降速度快。
 - 5、采用表面镀铬处理，增加表面硬度，延长使用寿命。
1. Adopts high-quality 27SiMn regulated steel pipe, with high tensile strength, high yield and strong bearing capacity.
 2. Patented technology design and advanced production manufacturing are adopted to ensure the stability of product quality.
 3. Imported oil seal is adopted, with good sealing performance.
 4. Special design, light weight, fast lifting and lowering speed.
 5. Surface is chromed to increase the surface hardness and prolong the service life.

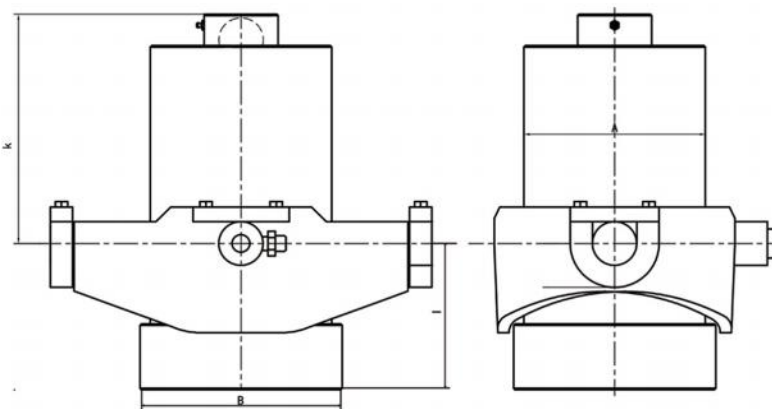


型号 TYPE	举重 Lifting weight (T)	l(mm)	安装距 K(mm)	缸径 A(mm)	B(mm)
DFQ 149/6/1465	9-20	130	316	172	180
DFQ 149/6/1825	9-20	130	376	172	180
DFQ 169/5/1410	22-32	149	353	194	207
DFQ 169/6/1680	15-26	146	351	194	207
DFQ 169/6/1860	15-26	146	361	194	207
DFQ 169/6/2040	14-25	146	391	194	207
DFQ 169/7/2155	11-22	146	369	194	207
DFQ 191/6/1695	20-32	190	312	217	240
DFQ 191/7/1955	16-28	190	312	217	240
DFQ 191/7/2165	18-32	190	312	217	240
DFQ 191/8/2705	14-25	190	312	217	240
DFQ 214/7/2375	20-38	200	362	245	260
DFQ 214/8/2215	18-38	200	316	245	260
DFQ 214/8/2455	18-38	200	346	245	260
DFQ 214 9/2775	11-28	200	346	245	260



双作用平推多级缸


Double acting horizontal push
multistage cylinder

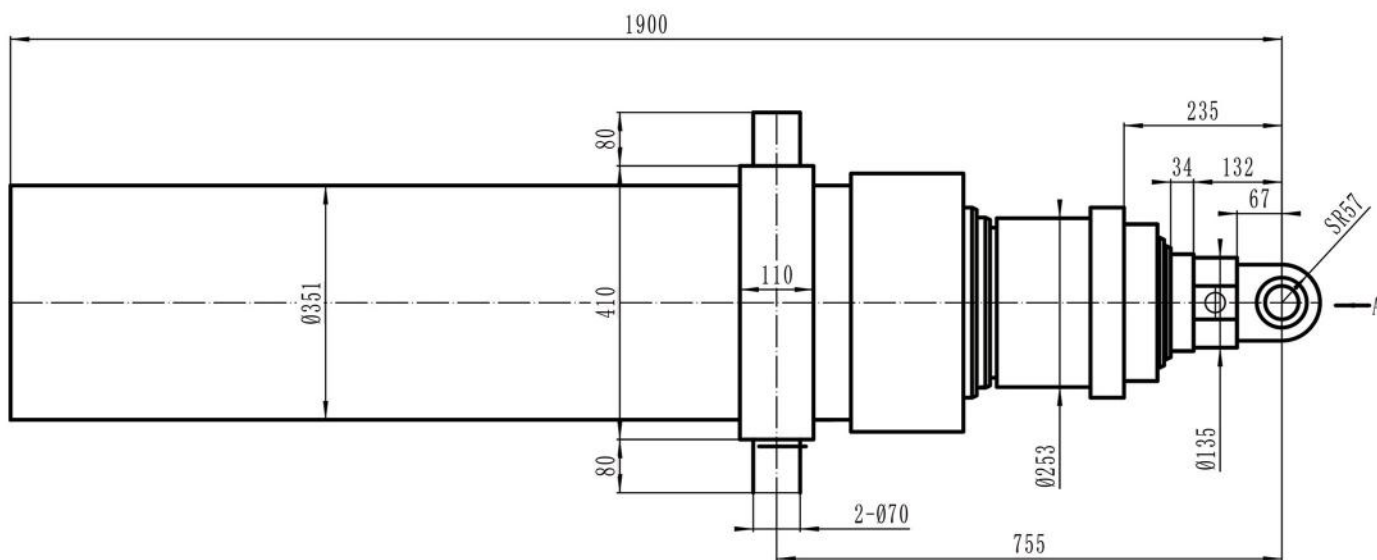

序号 NO.	产品名称	型号 MODEL	第一节缸径 BORE DIAMETER (mm)	行程 STROKE (mm)	工作压力 WORKING PRESSURE (MPa)	油口尺寸 OIL PORT SIZE (mm)
1	双作用平推多级缸	HS5TG-E240*8509ZE	240	8509	16	M27*2/M36*2
2	双作用平推多级缸	HS6TG-E285*7740ZE	285	7740	16	G1''/M48*2

鼎泰自卸车液压系统的组成

Composition of hydraulic system of dingtai dump truck

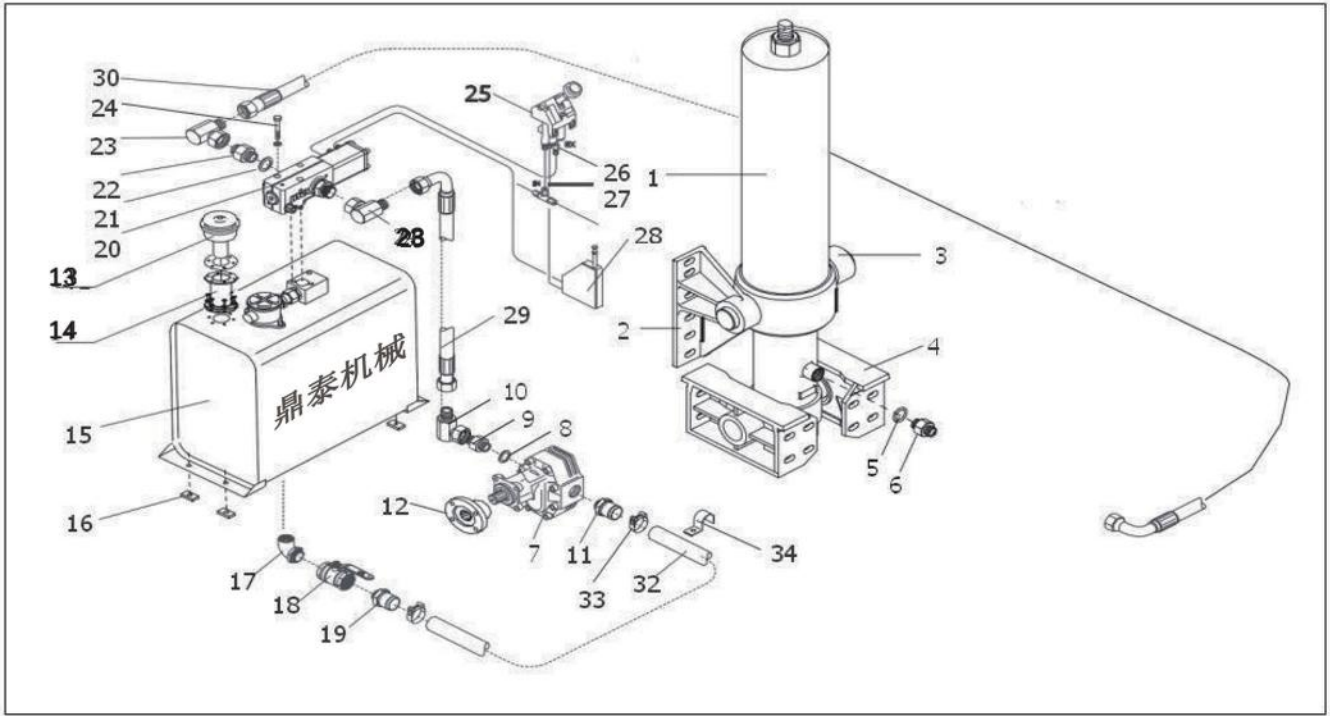





位置号	部件名称	数量	位置号	部件名称	数量
1	油缸	1	18	1.5"球阀	1
2	左提升支架	1	19	低压管接头1.5"	1
3	右提升支架	1	20	PT型举升阀	1
4	底盘支架	2	21	1"组合垫圈	1
5	1"组合垫圈	1	22	1"直通接头	1
6	1"直通接头	1	23	1"直角接头	2
7	齿轮泵	1	24	PT阀安装套件	1
8	1.25"组合垫圈	1	25	气控阀	1
9	1.25"-1"直通接头	1	26	气控阀安装套件	1
10	1"直角接头	1	27	三通气路接头	1
11	LP管接头1.25"-LP28	1	28	FC型限位阀	1
12	泵联接器	1	29	HP 16-2500-00-90型高压油管	1
13	空气滤清器总成	1	30	HP 16-4000-00-90型高压油管	1
14	油箱加高法兰总成	1	32	2米长低压油管	1
15	油箱	1	33	管夹	2
16	油箱垫块	4	34	管卡13.13.14.	1
17	LP弯管接头 1.5"BSPOT-1.5"BSPIT	1			



XQF22-B限位阀 XQF22-B Limiting Vale

XQF22-B限位气阀，该阀动作灵活，使用寿命长，配合气控换向阀使用，通过该阀的开启和关闭，改变控制气流的方向，起到了限位作用。


XQF22-B Limiting valve, the valve is flexible, the long serve life, with air valve to use, by the opening and closing of the valve and change the direction of air flow control to play the role of limited function.

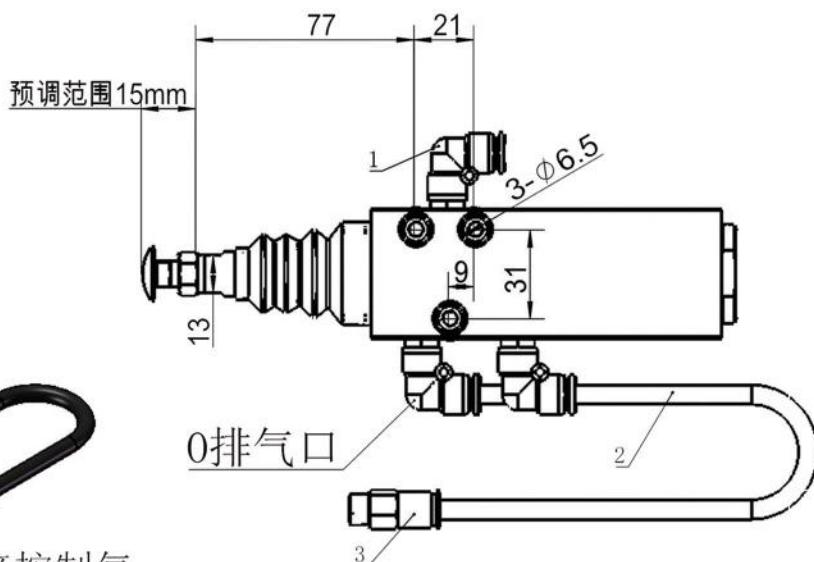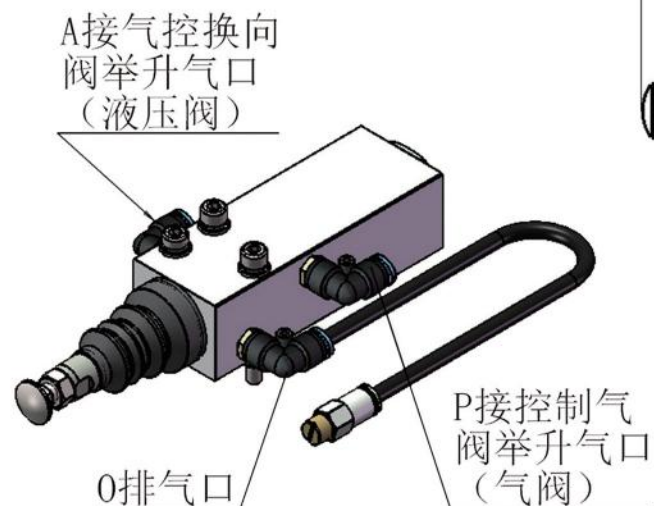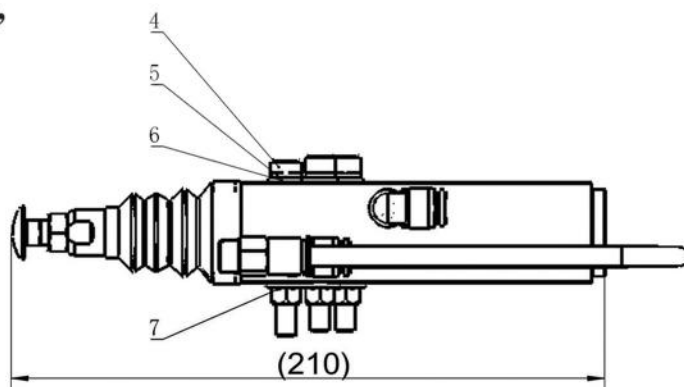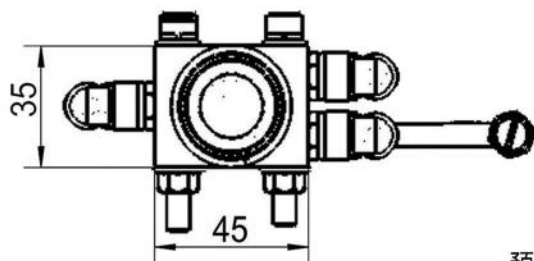


主要参数

1. 有效行程: 6mm;
2. 缓冲行程: 15mm;
3. 控制气压: 0.6—1Mpa;
4. 可调范围: 15mm;
5. 公称通径: $\phi 4\text{mm}$

原理图

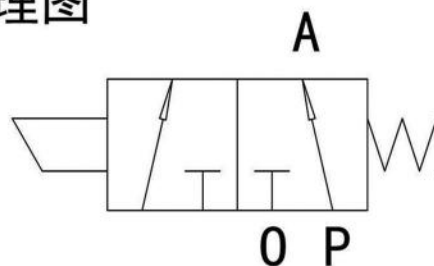

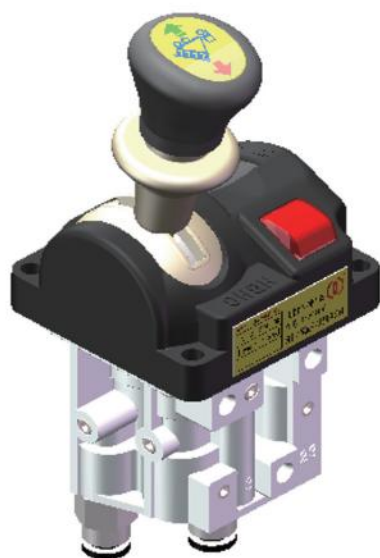







BKQF34-C比例控制气阀

BKQF34-C Proportional control air valve

该阀用在自卸车驾驶室内远距控制液压阀，实现的举升、中停、下降、慢降动作。

该阀中停位置自锁，换位明确。

Used in the truck cab remote control hydraulic valve to meet the motion for lifting, middle stop, slow down. The valve middle-stop position locking, clear transposition.

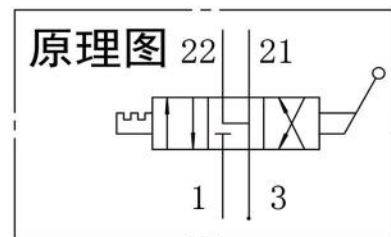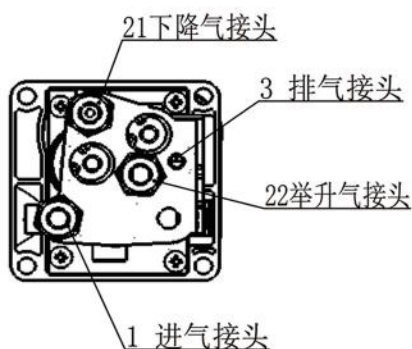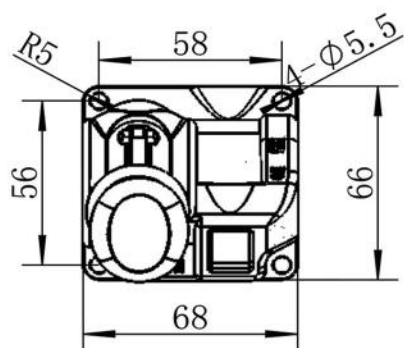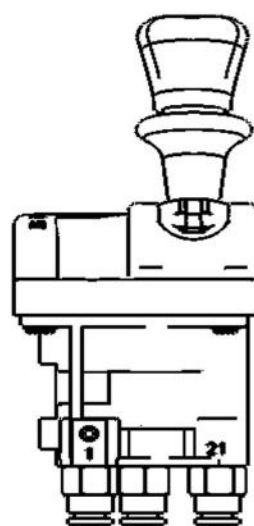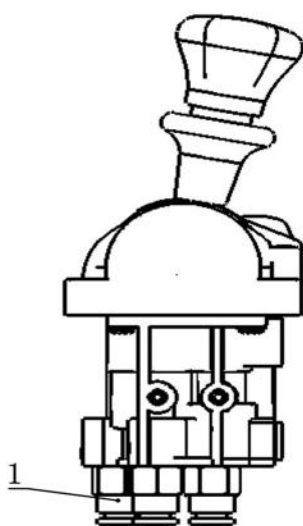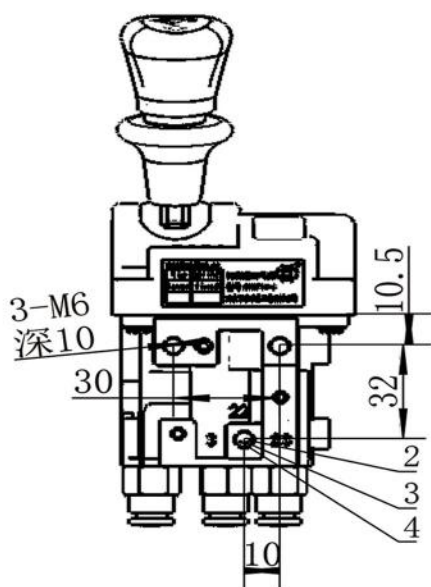




主要参数：1、额定压力：1Mpa 2、通径：4mm 3、控制气压：0.6-1Mpa
4、工作温度：-20至+80 5、工作介质：空气



34BQK-E20L气控换向阀 34BQK-E20L Air control reversing valve

34BQK-E20L气控换向阀是自卸汽车起举升作用的控制阀，该阀特点是具有慢降功能、安全溢流功能、回油口可直接与油箱回油口安装在一起。该阀可以配合前顶油箱、慢降组合控制气阀、限位气阀，是前顶式自卸汽车合理的配置。

34BQK-E20L Air control reversing valve is a gas control valve for dumper that make a function of lift. It has a function of slow down. Safety relief function, The oil return port can be directly installed together with the fuel tank and the oil return port. The valve can slow down, with the top tank combination control valve, limiting valve, the top is reasonable configuration of dump truck.

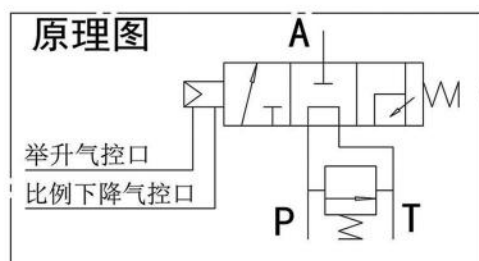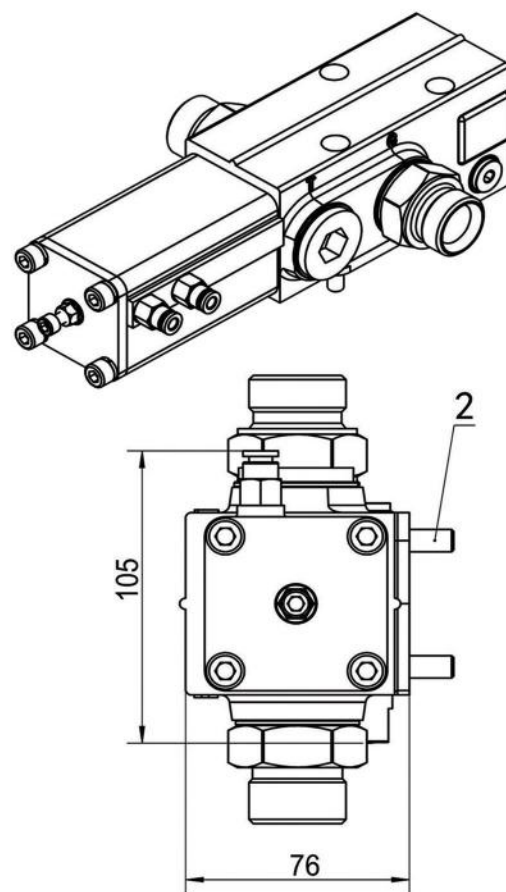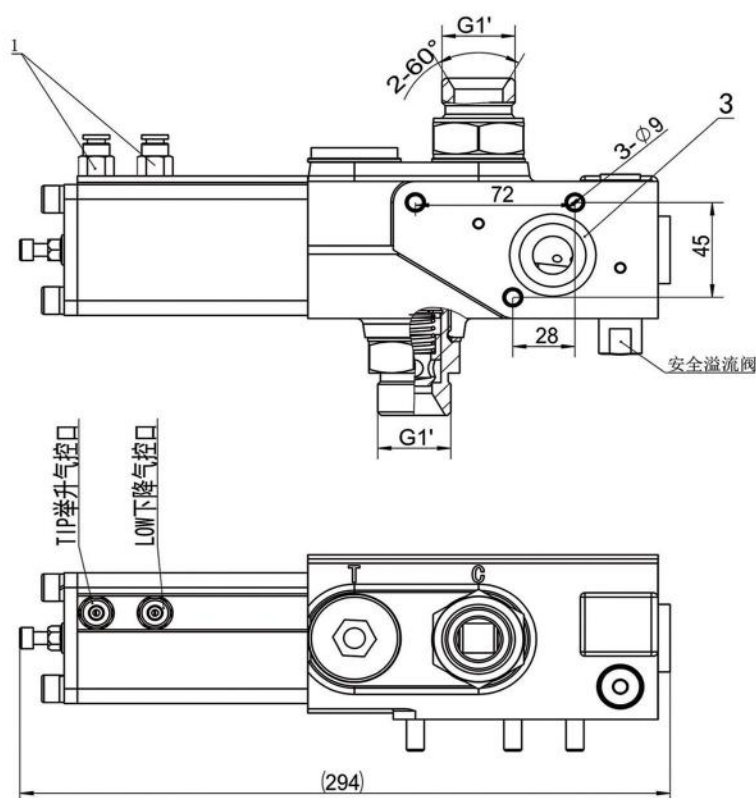

主要参数： 1.溢流压力22MPa 2.通径: 20mm 3.额定流量: 100L/min
4.控制气压: 0.6-1Mpa 5.工作温度: -20至+80℃ 6.工作介质:液压油
7.产品执行标准《自卸汽车换向阀技术条件》QC/T461-1999

齿轮泵

1. 齿轮泵系列号.

Gear pump series.

2. 公称排量 (毫升/转) .


Nominal displacement (ml/r) .

3. 旋转方向 (从轴端看) .

Rotation direction (from the shaft end) .

4. 油口接头形式: 双向泵为泵体与后盖加工有内螺纹孔.


Oil outlet joint type: bidirectional pump for the pump body and the back cover of the screw hole.

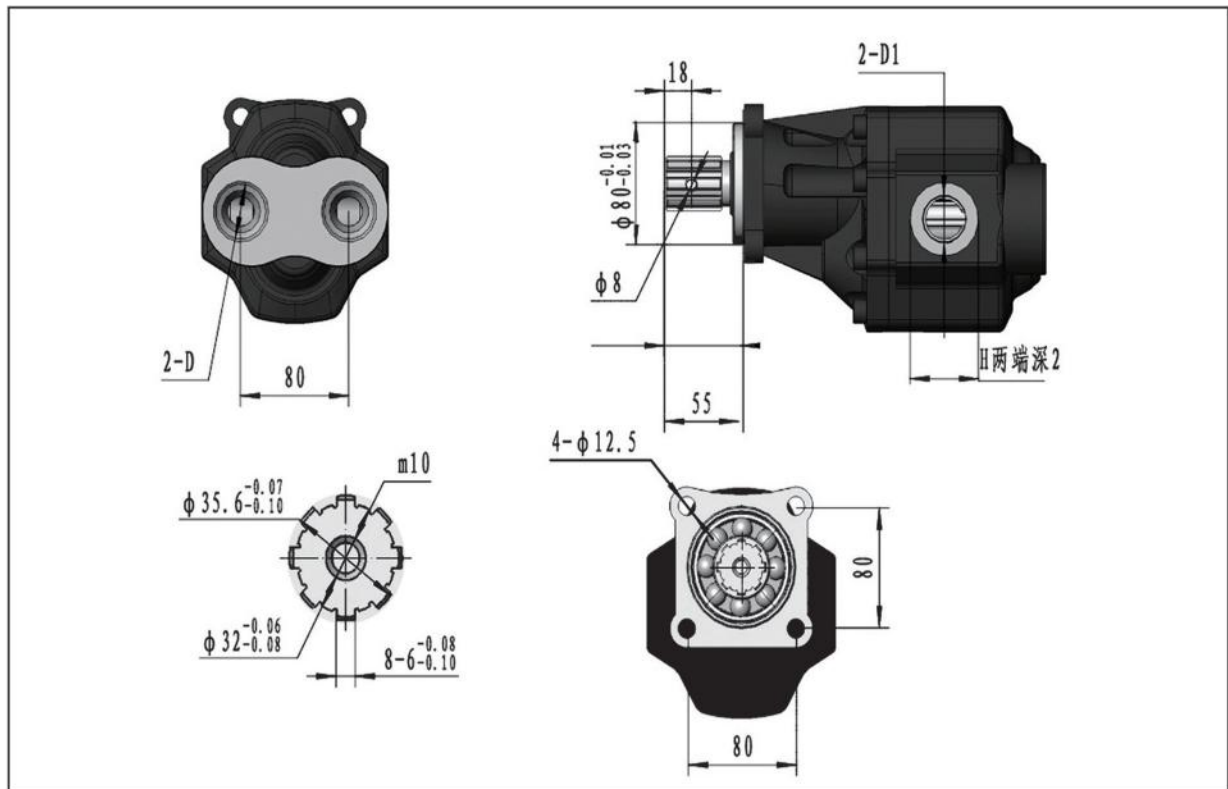


型号 Model	公称排量 Nominal displacement (ml/r):	压力(Mpa)Pressure		转速 (r/min) Speed		驱动功率 Driven power (KW)	容积效率 Volumetric efficiency	D	D1	H
		额定 Rated	最高 Max	额定 Rated	最高 Max					
CBF-F80H8S	80	23	28	2000	2500	68	≥91%	G1	G1	45
CBF-F100H8S	100	23	28	2000	2500	77	≥91%	G11/4	G11/4	56




油缸支架 油缸提升支架

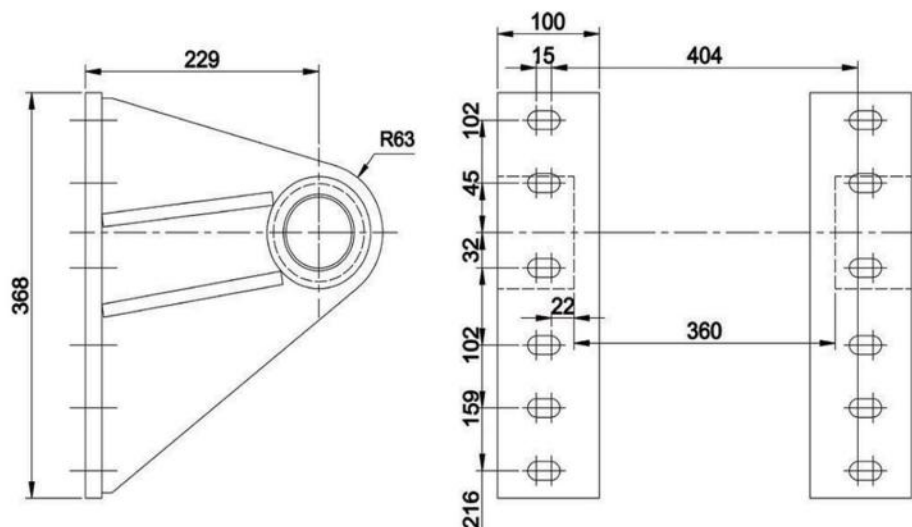


FC150系列油缸安装尺寸

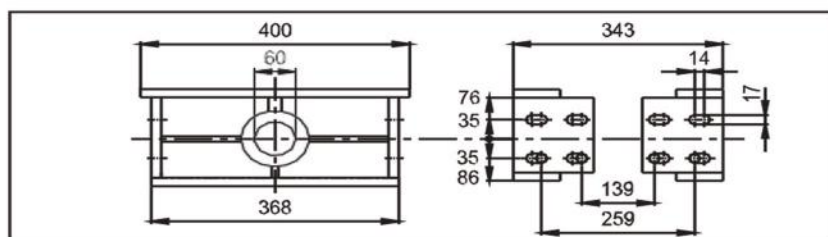

FC180系列油缸安装尺寸

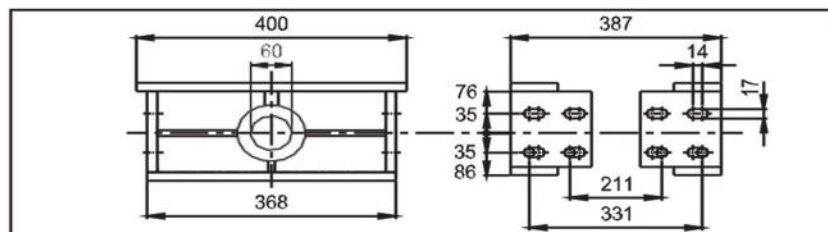




FC200系列油缸安装尺寸

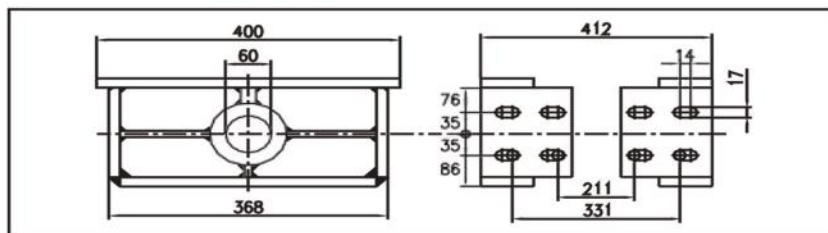

油缸底盘支架





油箱

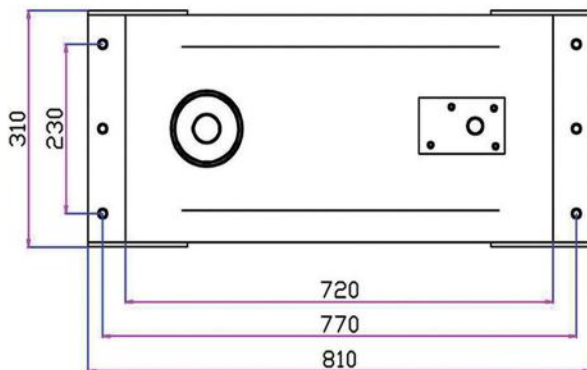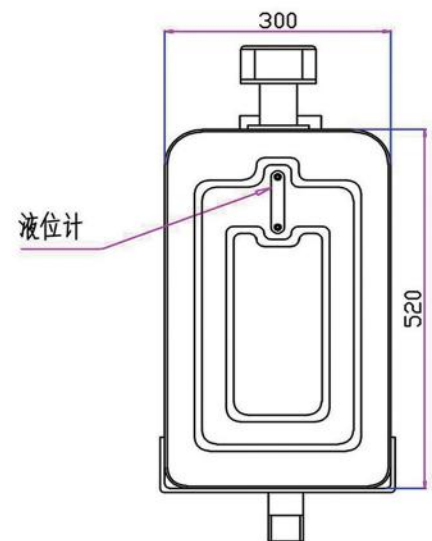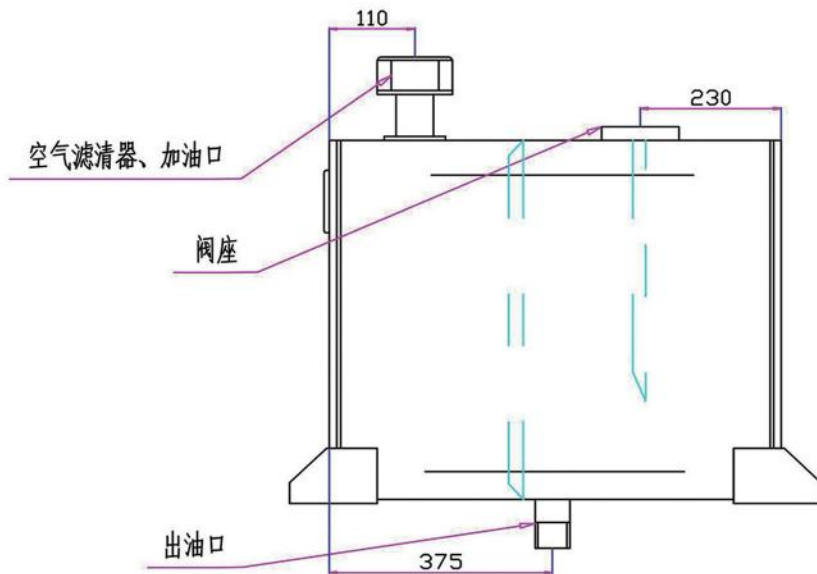

空气滤清器参数	回油滤清器
1. 气精度 30 μ m	1. 公称流量 100L/min
2. 油精度 120 μ m	2. 公称力 2.6MPa
	3. 芯精度 20 μ m



HOSE HP16 - 1000 -00 -90

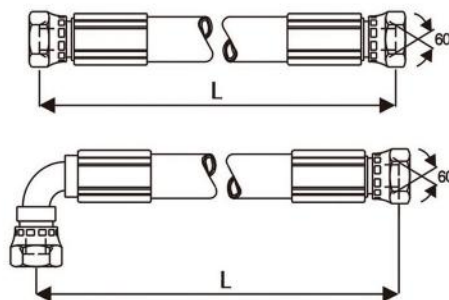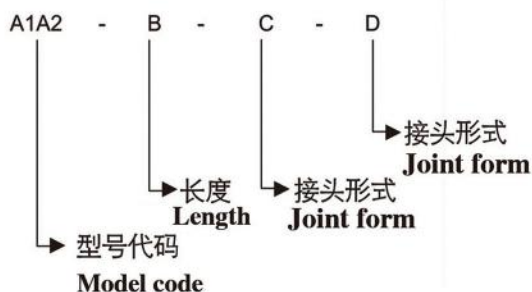

高压油管总成型号说明
High pressure oil pipe assembly model instruction

符号 Symbol	代号 Code	说明 Instruction
A1	HP	高压油管 High Pipe
A2		直径代号 Diameter Code
	08	内径代号-尺寸=1/2" (12.7mm) Inside demeter code
	12	内径代号-尺寸=3/4" (19.0mm) Inside demeter code
	16	内径代号-尺寸=1" (25.4mm) Inside demeter code
B		长度 Length
	700	液压油管长度 700mm Hydraulic oil pipe length
		液压油管长度范围700-4000mm
C/D		接头形式
	00	直通接头
	90	直角接头

高压油管的技术特性
Technical characteristics of hydraulic tubing

型号 Model	规格 Specification	动态工作压力(bar) Dynamic working pressure	最小弯曲半径(mm) Minimum bending radius
HP08	1/2"	310	145
HP12	3/4"	280	195
HP16	1"	225	240


高压管
High pressure pipe



低压油管的技术特性 Low pressure oil pipe assembly model instruction

软管内径 (inch)	内径代号 (inch)	胶管内径 (DN=mm)	胶管壁厚 (mm)	胶管外径 (mm)	最小额定压力 (bar)	弯曲半径 (mm)
1 1/4	20	31.8	5.5-6.5	42.8-44.8	14	205
1 1/2	24	38.1	5.5-6.5	49.1-51.1	7	250
1 3/4	28	44.5	5.5-6.5	55.5-57.5	7	280
2	32	50.8	6.5-7.5	63.8-65.8	7	305

低压油管总成型号说明 Low pressure oil pipe assembly model instruction

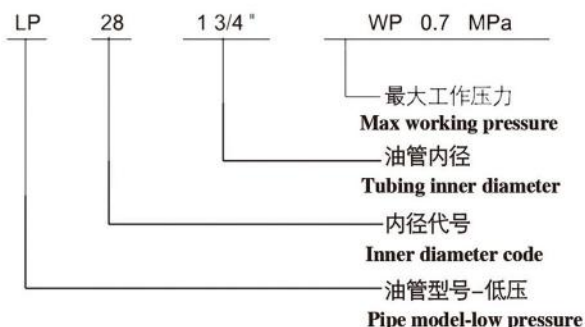

低压管
Low pressure pipe



自卸车液压系统规范操作与保养的一般要求

1.1 一般说明

所有鼎泰油缸系举升专用，禁止作为其他任何用途使用。无论何时不得将油缸作稳定支撑作用。

无论何时不得使用油缸在超载、偏载状况下工作。油缸在偏载状况下工作十分危险。严禁拆卸或调整举升阀上的溢流阀，否则可能发生重大事故，甚至危及人身及财产安全！

1.2 安全举升

不正确操作自卸车是危险的，并有可能发生事故。为了发挥油缸的最佳效果并保证自卸车的安全，请务必遵从以下操作规范：

1.2.1 安全的使用环境

在到达指定地点后请通报相关负责人并服从现场管理。只有当司机认为安全时，方可装卸货物。倾卸货物时，车辆的安全时司机的责任。如果与用户意见达不成一致，请与您的雇主商议。在任何可能发生车辆侧翻的情况下绝不可举升厢体倾卸货物。

在工作区域地面情况不清楚下绝不可进行倾卸。

确保车辆所处地面前后左右结实平坦。

确保车辆保持水平，尽可能不要在下坡处举升，半挂/全挂车举升时，必须保证车主与挂车成一直线。当厢体正在上升或处于举升状态时，严禁任何人员靠近工作区域内站立或行走。

在举升时，操作人员不能离开操作位置。操作者必须小心观察车辆周围有无障碍物，特别是车辆上方，请勿依赖现场人员来指出这些障碍物。

请注意侧向风的影响，作用在大的车厢表面上的风力会导致车辆翻倒。

确保货物在货厢内前后左右承载均匀。

确保正确的轴载，这有助于防止车辆侧翻。假如货物装载的过于靠前，则可能导致液压系统超负荷工作。

当车辆正在装载或停靠在装载区时，决不能站在厢体上。

1.2.2 规范的操作

当车辆挂上档位时请勿结合取力器，在举升完毕后务必将取力器从变速箱上分离。在举升过程中请勿使发动机运转过快，油泵的超速运转会导致液压油供应不足而烧坏油泵。

务必保证在厢体举升到10度前，后门已打开。在试图清除任何滞留在厢体内的障碍物前，请先落下厢体，如果所载货物高于后门，请保证它不会卡住后门，厢体可能因为车厢尾部的承载而造成向后倾翻。

厢体未得到充分的支撑前绝不要站在举升的厢体下。

请注意有些货物很容易遇冷凝固，并冻结在车辆的某一侧，造成卸货时偏载。

请注意有些货物低密度是不均匀的，这可能会导致卸货不均，造成车辆不稳定而发生车辆翻货。

在厢体完全回落到位后，请将气控阀手柄在“下降”位置保持30秒左右，再拨到中间位置，当气控阀手柄处于“下降”位置时，切勿行驶车辆。

卸料时切勿使用倒车档位，取力器、油泵反向旋转容易引起油泵、油封损坏。举升重载厢体过程中，切勿快速回落厢体。

请确保卸载后厢体全空。在厢体落下和后门锁住之前，请勿开动车辆。绝不可以厢体举升状态下开动车辆然后急刹车的方式卸载粘滞货物。

1.2.3 危险处理

当厢体（或车辆）碰到了高压线：跳离车辆。

马上拨打当地紧急电话。

请勿同时接触地面和车辆，否则形成闭合回路引起触电导致重伤或死亡。在电源切断前不得允许任何人回到车辆。

如果厢体的举升角度达到25度左右（厢体已上升半程）货物仍未卸出，请停止举升并检查货物粘滞原因。在走向车辆后部时请注意避让车辆与货物。

如果您认为可能会发生翻车，请停止举升并缓慢下落厢体，然后自己检查原因。

如果车辆开始倾翻：呆在车内，在驾驶室内是安全的。身体紧靠驾驶室椅后背。紧握方向盘。绝不从正在发生倾翻的车辆内向外跳。

请照顾好您的自卸车油缸！保养上的花费是您安全的投资！

2. 保养指南

2.1 安全保养

靠近或在转动部件的地方进行保养是危险的。

保养时若需举起车厢，请确保车厢得到安全支撑。

在未得到安全支撑的车厢上或车厢下面工作将危及生命。

2.2 液压油

为避免液压系统遭受损坏，我们建议液压油的粘度（40°时）应处于75-16mm²/S之间。最高油温不得超过80°。

推荐使用如下表所示抗磨液压油：（液压油的质量符合GB11118.1）

使用环境	推荐液压油型号	粘度指数
东北地区冬季（-40°以下地区）	10	60
东北区（-40°至-10°）	15	80
华北、西北地区（-10°至10°）	22	100
华中、华东、西南地区（10°至25°）	32	100
华南（25°至50°）	46	100
南方夏季50°以上地区	68	100

油温在65°以上时为避免过热，请使用液压油冷却器。

航空液压油也可使用，请在使用前与鼎泰或液压油供应商联系。

事故后处理：应检查液压系统的损坏情况（特别是进油管、油箱及油泵与取力器的联接）。检查所有气压、液压连接部分的损坏和泄露情况。

可降解生物液压油易吸收水分，因此使用带有干燥器的鼎泰空气过滤器非常重要。鼎泰同时推荐在所有系统中使用油箱回油过滤器。

为避免污染液压油，在给油箱加油前请先清洁漏斗及油口周围。油位不要高于油箱油位计最高液位线，以免液压油溢出。

3. 保养规程

类型	保养内容	保养对象	保养周期		
			每天	每周	每半年
一般保养	气控系统	气管	检查有无破损和泄漏		
		气控阀	检查运行是否正常及有无破损和泄漏		
	液压系统	油缸	检查油缸工作、损坏和泄漏情况	清洁油缸外表	
		油泵		检查漏油指示孔有无漏油	
		液压油管及接头	检查有无损坏和泄漏，所有接头是否松动		
		举升阀	检查损坏和泄漏情况		
	油箱总成	油位	检查油位，不足时添加		
		回油滤芯		检查滤芯里是否有杂物	更换回油滤芯
		空气滤芯		检查空气滤芯是否有灰尘、液压油或水	更换空气滤芯
		液压油箱		油箱是否漏油	清洗油箱
		液压油		液压油是否变色、变质	更换液压油
	螺栓、螺母的紧固	螺栓螺母		检查螺栓、螺母是否达到规定扭矩。各种螺栓螺母扭矩详见《螺栓螺母扭矩表》。自锁螺母如已松动，请及时更换新自锁螺母。	
	厢体	所有型号		润滑后翻转轴	
		三面倾卸车		润滑前端铰链	
		机械后门		润滑后门机械锁装置	
	辅助部件	门锁装置厢体剪式稳定系统油缸支架的润滑点		润滑锁钩转轴，润滑固定旋转点（3个）	

注意：不得使用任何蒸汽清洁剂来清洁液压部件（油缸、阀及软管）



收割机油缸 reaping machine hydraulic cylinder



农用设备液压油缸 Agriculture hydraulic cylinder				
规格型号 Model	主要用途	总体尺寸 Total size	缸径 Bore size(mm)	行程 stroke(mm)
DG-E110/70*1500-1907	卸粮油缸 unloading cylinder	1962*133	110	1500
SG-E70/40*260-580	联合收割机 combine harvester	640*83	70	260
SG-E70/40*103-620	起落油缸 up and down cylinder	680*83	70	103
DG-E63/35*195-405	割台油缸 cutting table cylinder	458*76	63	195
DG-E63/35*165-370	转向油缸 swing cylinder	415*76	63	165
YS-E40/22*65-418	变速油缸 shifting cylinder	448*50	40	65



工程机械用液压缸

Hydraulic cylinder for engineering machine



多种规格型号的装载机，挖掘机，推土机、环卫车等工程机械用液压缸供您选择，也可根据您的具体要求为您定做。

Many kinds of model for loader , excavator , bulldozer , Sanitation truck engineering hydraulic cylinder for your choice , we can also customize hydraulic cylinder as your require.



地址/Add: 山东省临清市东外环北首 (高速路口南1公里)
电话/Tel: 400-063-0858 传真/Fax: +86-635-2428288
Https: //lqdingtai.en.alibaba.com
Https: //www.lqdingtai.com
邮编/Post: dingtai@lqdingtai.com

