

减振器EH








CGM/EH系列在垂直方向提供优异的故障安全动态绝缘,无论是牵引和压缩。此类减震器显著减少振动并吸收相当程度的冲击,为高铁动车组,农业机械,拖拉机,越野机械和军事设备的广泛应用提供了极好的全面解决方案。这些减震器特别适用于需要通过组装实现的绝缘结构。

The CGM/EH range provides excellent fail-safe dynamic insulation particularly in vertical direction, both in traction and in compression. They significantly reduce vibrations and absorb considerable levels of shocks to provide an excellent all-round solution to a wide range of applications on agricultural machines, tractors, off-road machines and military equipment. These mounts are specially suitable for insulating structures where through assembly is required.


应用领域APPLICATIONS

发动机 Engines 散热器 Radiators 驾驶室 Cabs 空调压缩机 ACC




Item	Hardness (IRHD)	A	B	F1	D2	L1	L2	L3	Average Stiffness (daN/mm)	Max. Load (daN)	Max Dedflec. (mm)
EH30W	40	30	5.5	8.2	18	16	26.5	10	28,0	42,0	1,5
EH30M	60								50,0	75,0	1,5
EH40W	40	40	19	8.5	16	21.5	33.5	12	35,0	63,0	1,8
EH40M	60								70,0	105,0	1,5
EH50W	40	50	10	13	32	30	50	20	43,0	80,0	1,9
EH50M	60								86,0	130,0	1,5
EH65W	40	65	16	16.5	40	42	61.7	23	58,0	120,0	2,1
EH65M	60								140,0	260,0	1,9
EH90W	40	89	19	24	57	50.5	73	25	130,0	260,0	2,0
EH90M	60								240,0	450,0	1,9
EH125W	40	124	24	27	65	58.5	90.5	32	205,0	512,0	2,5
EH125M	60								415,0	1037,0	2,5

载重(KG)

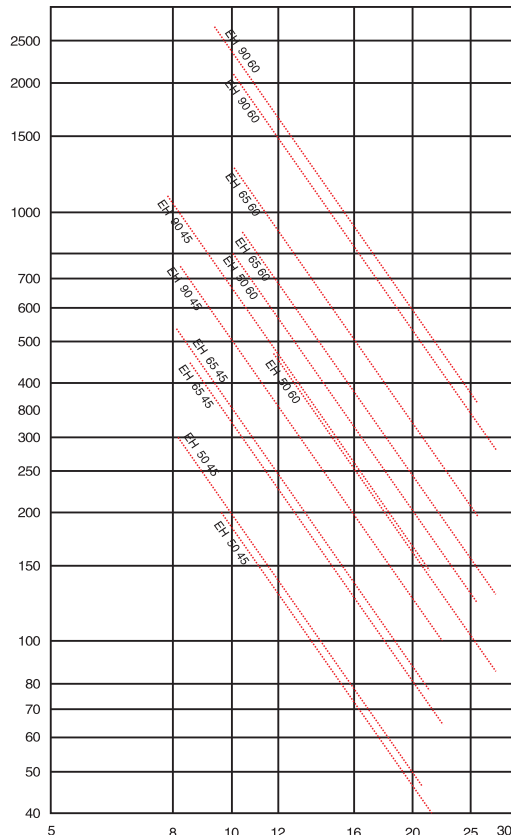

固有频率Hz

载重(KG)

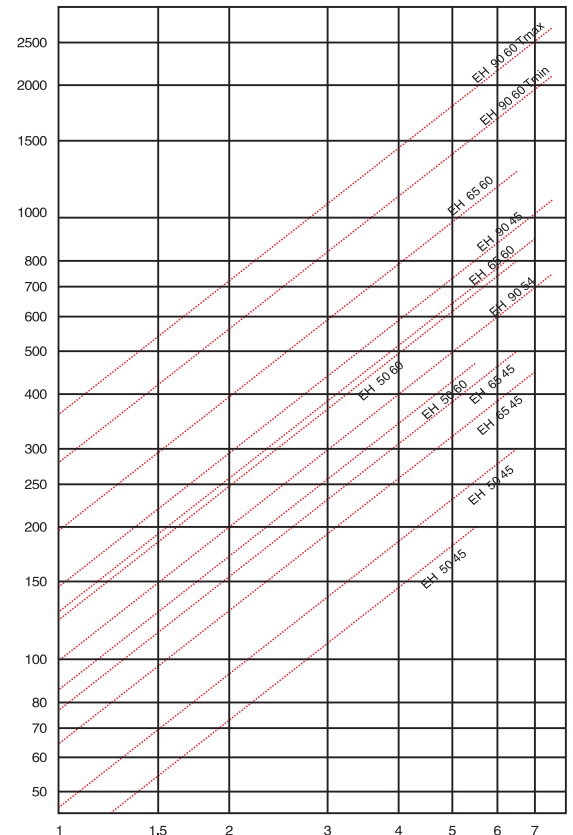

适当压缩量mm