

加强抓 DEMOLITION GRAPPLE

适用对象

建筑垃圾、废铁等强硬垃圾的装卸及分拣。

产品特点


- 大小杂物可一同抓取；
- 耐磨板材设计，更耐磨，使用更持久；
- M + S马达带刹车功能，油缸带美国SUN安全平衡阀；
- 电控和液控系统带有减压阀、溢流阀，更安全稳定，操作方便故障率低。

Applications

Demolition of solid structures, scrap handling, cleaning, moving, loading, sorting and organizing materials in order.

Main features

- Capable of grabbing materials of different sizes in bulk.
- Abrasion resistant steel, durable in use.
- Driven by M+S motor with brake valve; cylinder with USA safety valve (USA SUN brand).
- Pressure reducing valve, relief valve (all the valves are USA SUN brand) are in electrical and hydraulic control system, making it safer and much more stable and durable in use.

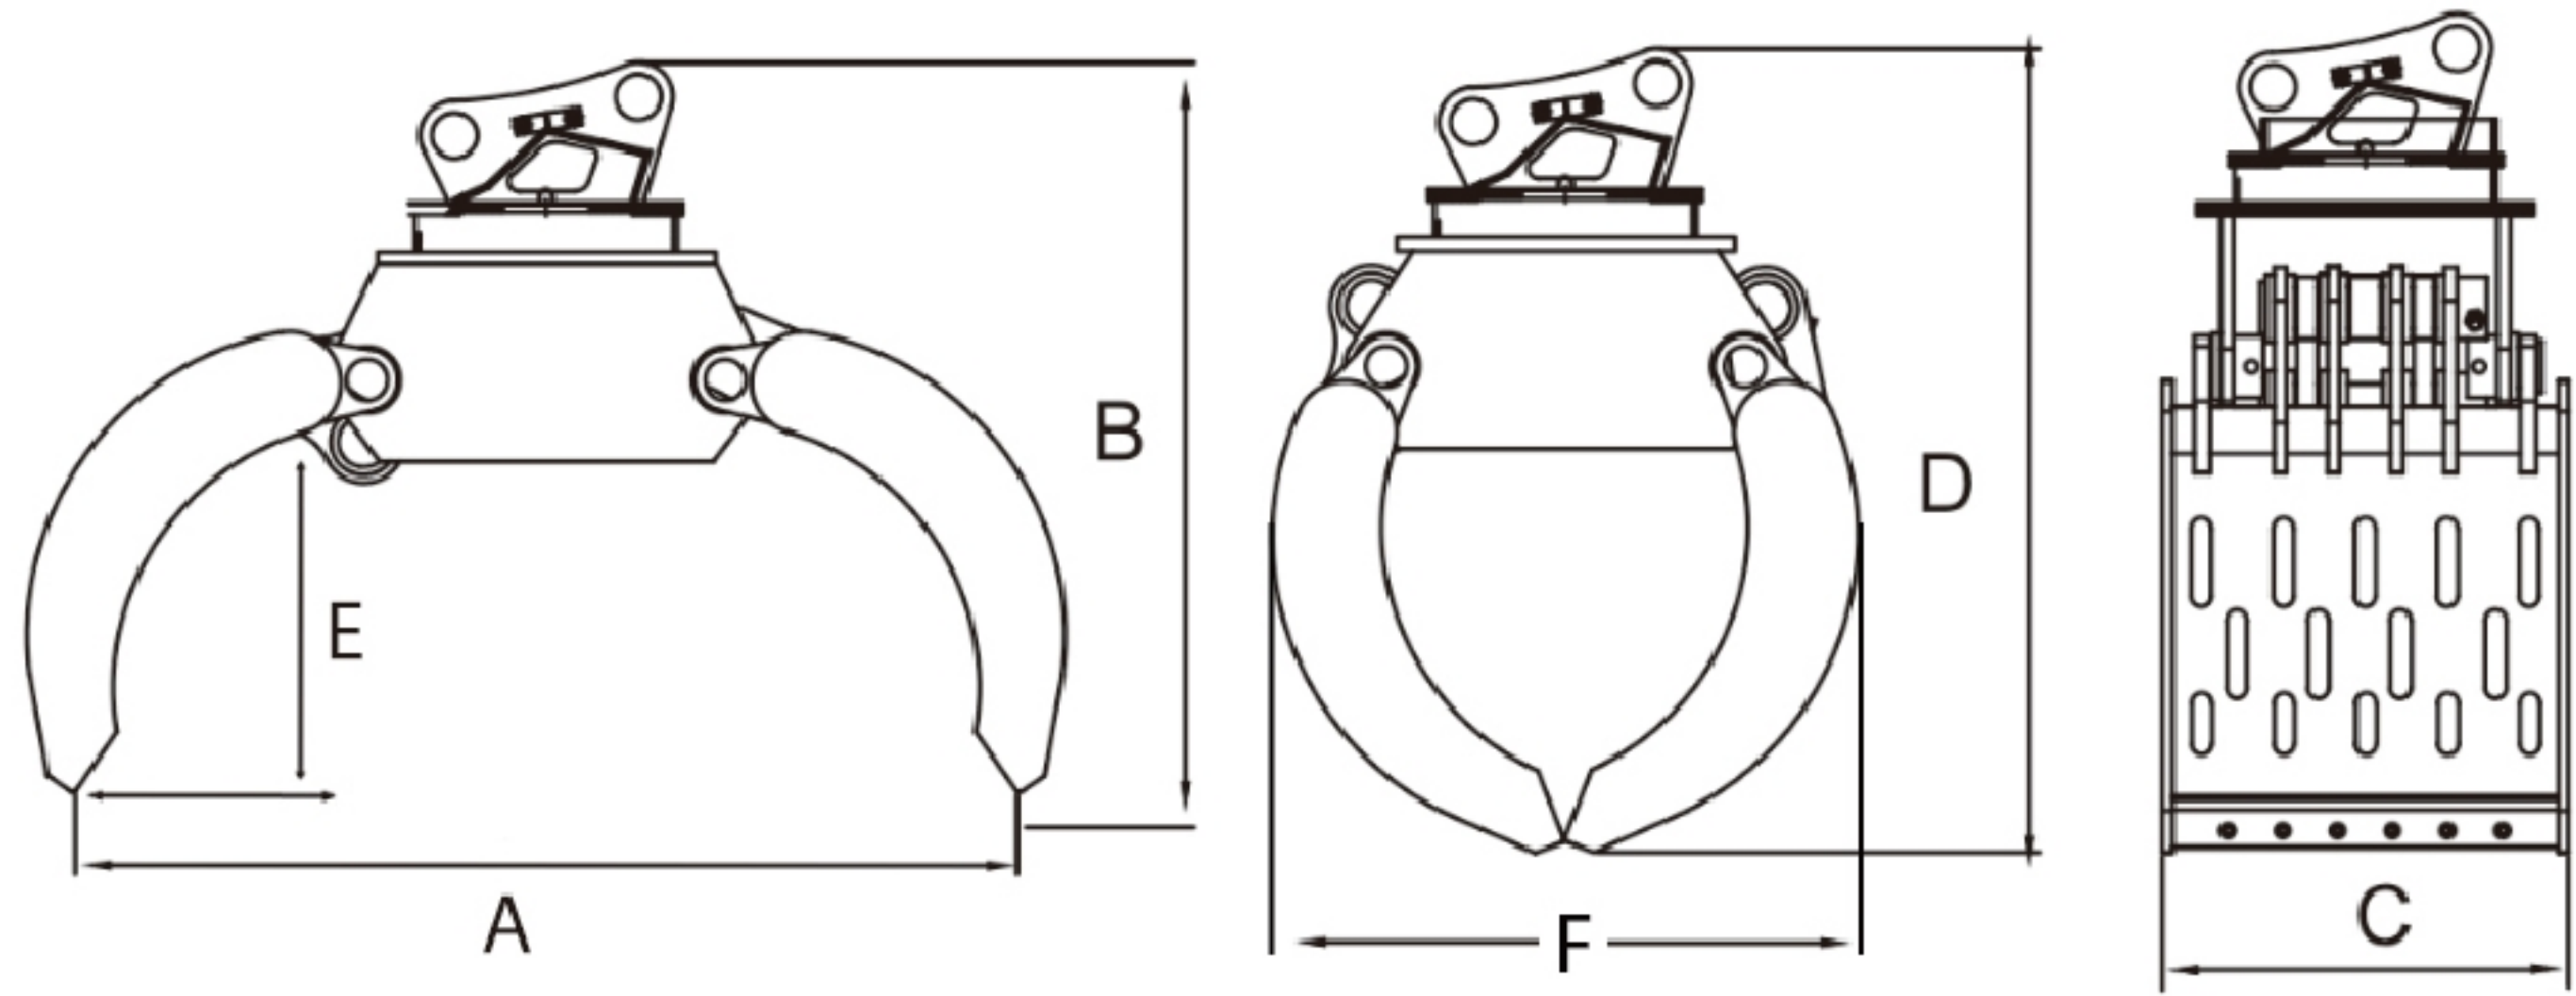

类别/ Category	Unit	JT-00	JT-00S(850)	JT-00S(950)	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10
旋转角度 Rotation Angle	°	-	360	360	360	360	360	360	360	360
马达压力 Motor Pressure	bar	-	90-110	90-110	90-110	110-120	110-120	130-150	130-150	130-150
马达流量 Necessary Flow	lpm	-	20-30	20-30	20-30	30-55	30-55	40-70	40-70	40-70
油缸推力 Oil Cylinder Force	ton	3.8	3.8	3.8	5.3	8.8	10	17.2	19.6	23.7
油缸压力 Oil Cylinder Pressure	bar	160-200	160-200	160-200	160-200	160-200	160-200	200-250	250-300	250-300
油缸流量（单条）Oil Cylinder Flow	lpm	5-15	5-15	5-15	15-30	20-40	25-50	40-60	45-60	50-65
Open Width A	mm	770	850	950	1160	1400	1500	1700	1950	2400
Width C	mm	350	425	425	450	500	600	800	1030	1200
Depth E	mm	205	250	312	326	437	440	445	530	652
闭合外尺寸 F	mm	497	582	625	779	837	884	1055	1179	1379
无头不旋转重量 Fix Type Weight	kg	70	96	102	160	245	316	613	974	1500
旋转设备重量 Rotating Type Weight	kg	-	165-185	170-190	230-240	310-330	440-460	900-960	1350-1500	1700-2100
适配挖机 Suitable Excavator	ton	1-2	2-2.5	2.5-3	3-4	4-6	6-9	12-16	17-25	26-35

质量为先 诚信为本 服务至上
 QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
 www.jtattach.com