





TE缓冲器

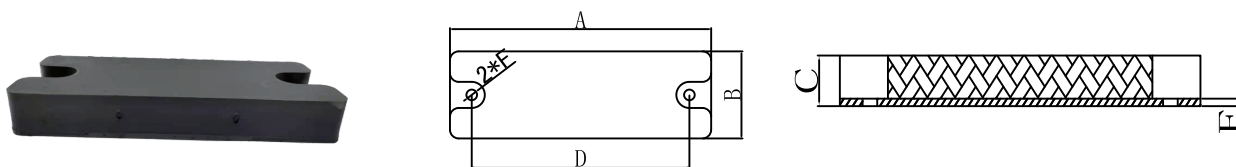

Ttem	A	B	C	D	E	F	G	Optimal load daN
TE250	250	100	34	200	4	17*13	—	800
TE300	300	100	27	250	4	12.2*12.2	—	1200
TE500	500	140	25	470	4	17*9	—	1500

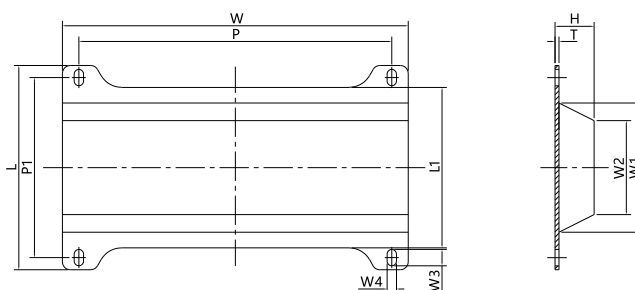

Item	Hardness (IRHD)	W	L	H	P	P1	W1	W2	W3	W4	T	Average Stiffness (daN/mm)	Max Load (daN)	Max Dedflec (mm)
TE44261MH	65	442	261	50	400	230	165	120	21	12	5	800	6400	8

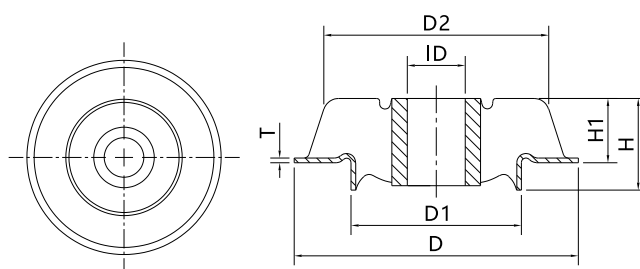

Item	Hardness (IRHD)	D	D1	D2	H	H1	ID	T	Average Stiffness (daN/mm)	Max Load (daN)	Max Dedflec (mm)
TE16066MH	65	160	100	120	66	48	25	3	740	2960	4
TE18660MH	65	186	111	147	60	42	38	3	940	5050	6