

旋转抱式抓木器

ROTATING LIGHT WOOD GRAPPLE

适用对象

抓木头，抓农作物等。

产品特点


- M + S马达带刹车功能，油缸带美国SUN安全平衡阀；
- 电控和液控系统带美国SUN溢流阀和减压阀，更安全稳定，操作方便故障率低；
- 根据需求可做加宽型。

Applications

Light duty job like waste handling cleaning and organizing.

Main features


- Driven by M+S motor with brake valve; cylinder with USA safety valve(USA SUN brand).
- Pressure reducing valve, relief valve(all the valves are USA SUN brand)are in electrical and hydraulic control system, making it safer and much more stable and durable in use.
- Custom service is available.

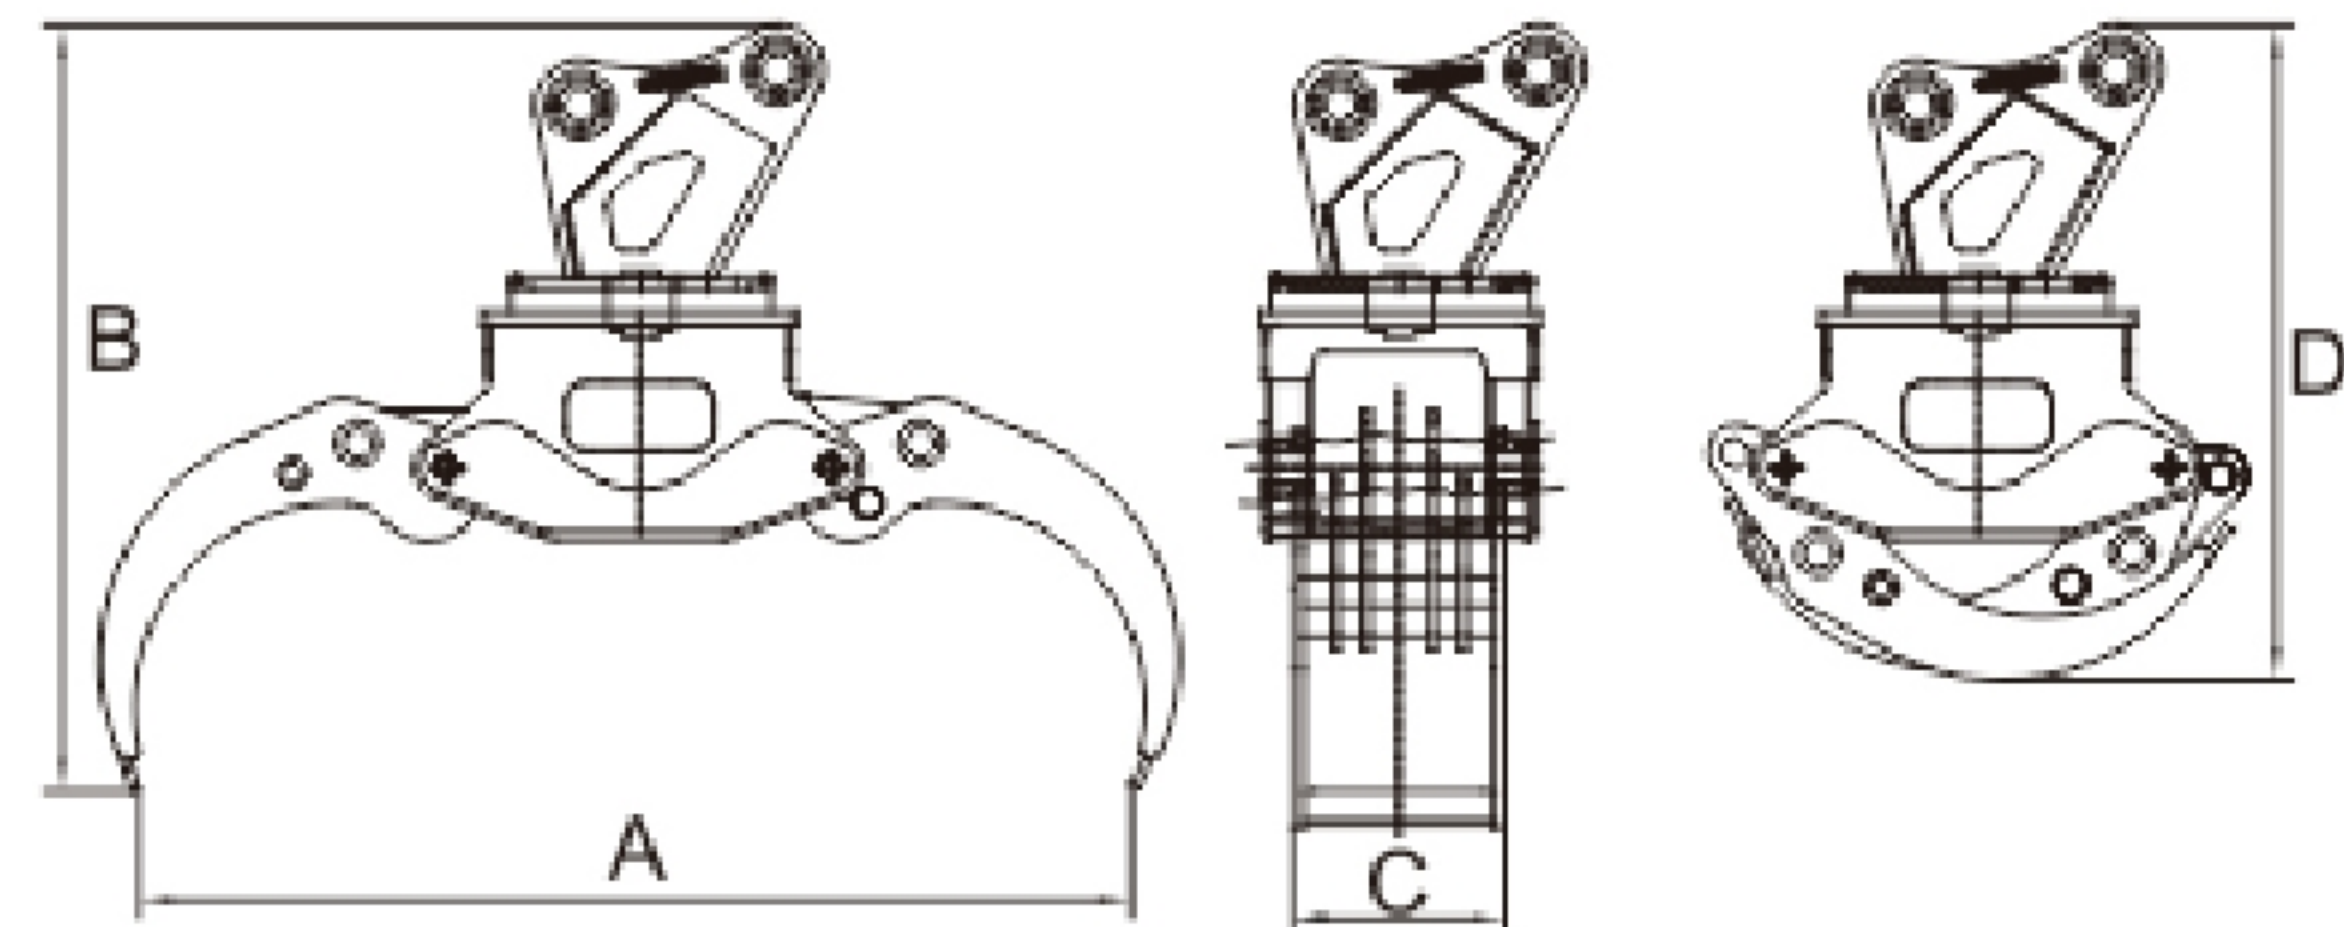

类别/ Category	Unit	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10
旋转角度 Rotation Angle	°	360	360	360	360	360	360
马达压力 Motor Pressure	bar	90-110	110-120	110-120	130-150	130-150	130-150
马达流量 Necessary Flow	lpm	20-35	30-55	30-55	40-70	40-70	40-70
油缸推力 Oil Cylinder Force	ton	3	6	9	12	12	13
油缸压力 Oil Cylinder Pressure	bar	110-140	160-200	160-200	180-230	180-230	180-230
适配挖机 Suitable Excavator	ton	3-4	4-6	6-9	12-16	17-25	26-35
Open Width A	mm	1222	1322	1525	1819	1950	2530
Width C	mm	330	407	470	644	488	604
设备重量 Weight	kg	240-260	350-370	420-450	740-770	810-860	1100-1160

抱式抓木器

LIGHT WOOD GRAPPLE

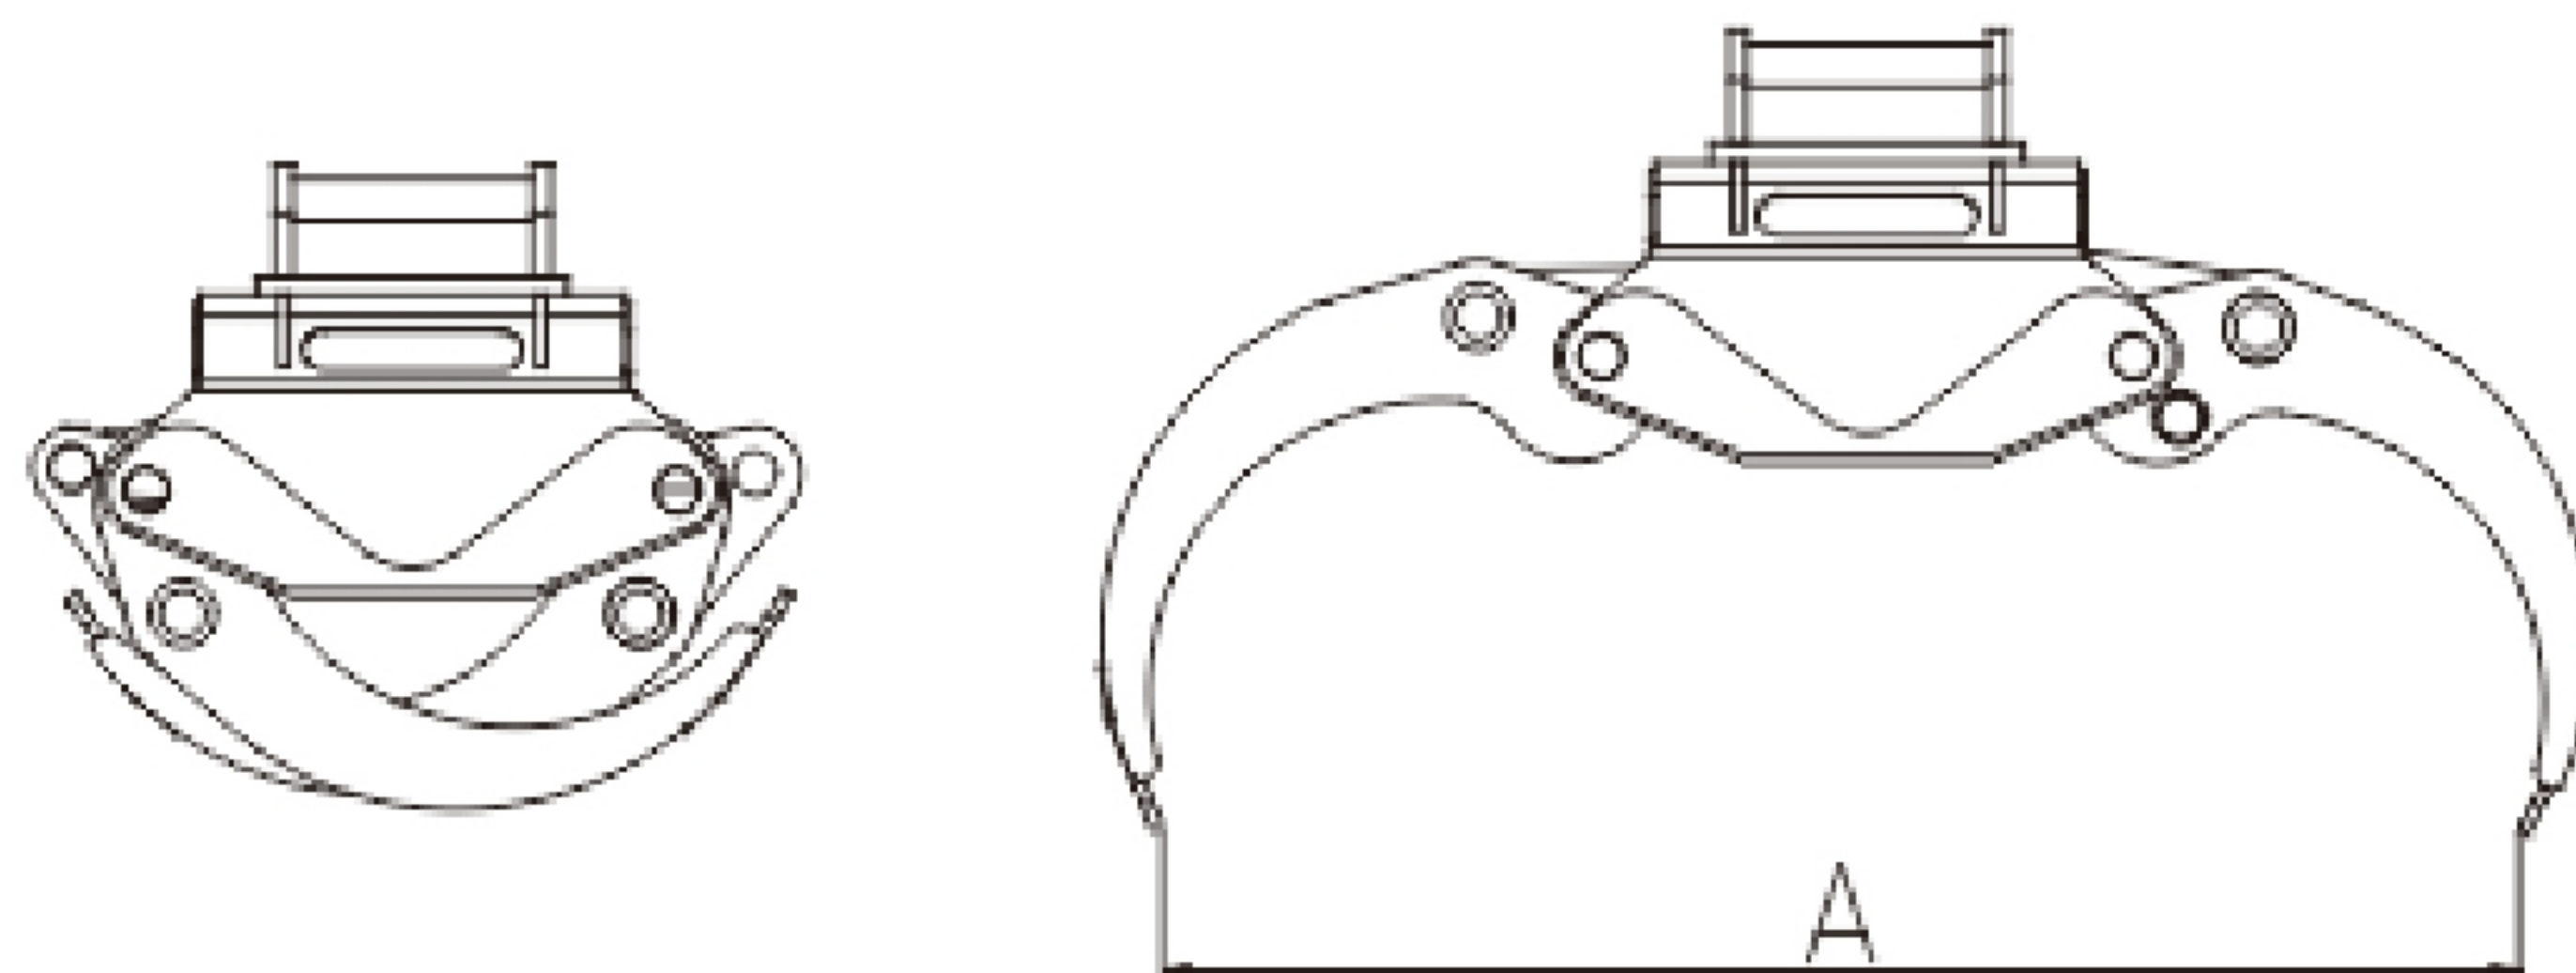

类别/ Category	Unit	JT-00	JT-01	JT-02	JT-04	JT-06	JT-06S	JT-08
A	mm	906	1222	1322	1525	1833	1950	2530
工作压力 Working Pressure	bar	110-140	110-140	160-200	160-200	180-230	180-230	180-230
适配挖机 Suitable Excavator	ton	1-2	3-4	4-6	6-9	11-14	14-16	17-25
设备重量 Weight	kg	80-110	180-220	280-320	365-400	410-440	520-560	800-860

质量为先 诚信为本 服务至上
 QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
 www.jtattach.com