江土重工 JIANGTU HEAVY INDUSTRY

液压破碎锤 HYDRAULIC BREAKER

适用对象

应用于矿山、拆除、建筑、采石场等，可安装于所有普通液压挖掘机、小型挖掘机及其它载货设备上，如滑移装载机、反铲装载机、起重机、伸缩式装卸机、轮式装载机等机械。

产品特点

●缸和主阀：精密加工，防止拉伤；
●活塞与中缸体一对一配磨；
●钎杆： 42CrMo，性能可靠；
●油封：原装进口NOK油封。

Applications

Used for mining,building demolition,quarry.
It can be mounted on all common hydraulic excavator and other carrier, like skid steer loader, backhoe loader, crane, telescopic loader,wheel loader and other machinery.

Main features

●Cylinder & valves: prevents scuffing with precision finishing treatment.
●Piston:every piston tolerance machined perfectly according to each cylinder.
●Chisel:42CrMo, exceptional performance and reliability.
●Seal kit: NOK.













类别/ Category	Unit	JTB450	JTB530	JTB680	JTB750	JTB850	JTB1000	JTB1250	JTB1350	JTB1400
机芯重量 Body Weight	kg	67	85	152	210	278	475	616	846	916
总重量Total Weight (Side/Top/Box)	kg	99/121/139	132/148/168	275/321/325	418/407/413	561/638/629	842/979/948	1381/1463/1427	1609/1698/1650	1950/2050/1978
工作压力Working Pressure	bar	88-117	88-117	108-137	118-147	127-157	147-167	147-167	157-176	157-176
工作流量Working Flow	lpm	20-30	25-50	40-70	50-90	60-100	80-110	90-120	130-150	120-180
冲击频率 Impact Rate	bpm	700-1200	600-1100	500-900	400-800	400-800	350-700	350-650	400-800	350-500
油管直径 Hose Diameter	inch	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1
钎杆直径 Chisel Diameter	mm	45	53	68	75	85	100	125	135	140
适用挖机 Suitable Excavator	ton	1.2-3.0	2.5-4.5	4-7	6-9	7-14	10-15	15-18	18-26	18-26


类别/ Category	Unit	JTB1400A	JTB1500	JTB1550	JTB1650	JTB1650F	JTB1750	JTB1850F	JTB1950	JTB2100
机芯重量 Body Weight	kg	952	1088	1309	1438	1586	1929	2411	2626	3396
总重量Total Weight (Side/Top/Box)	kg	1950/2050/1978	2359/2271/2279	2655/3059/2896	2735/3151/2983	3289/3503/3399	4167/4216/4390	4376/4809	5039/5164	7183/7393
工作压力Working Pressure	bar	157-176	157-176	176-196	176-196	176-196	176-196	186-216	186-216	196-235
工作流量Working Flow	lpm	120-180	150-190	200-260	200-260	200-260	210-290	220-270	220-290	290-350
冲击频率 Impact Rate	bpm	350-500	350-700	250-400	250-400	250-380	200-350	200-250	180-200	150-200
油管直径 Hose Diameter	inch	1	1	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4
钎杆直径 Chisel Diameter	mm	140	150	155	165	165	175	185	195	210
适用挖机 Suitable Excavator	ton	18-26	27-35	28-36	30-40	30-40	35-40	35-45	40-55	60-80

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

破碎锤配件 HYDRAULIC BREAKER PARTS

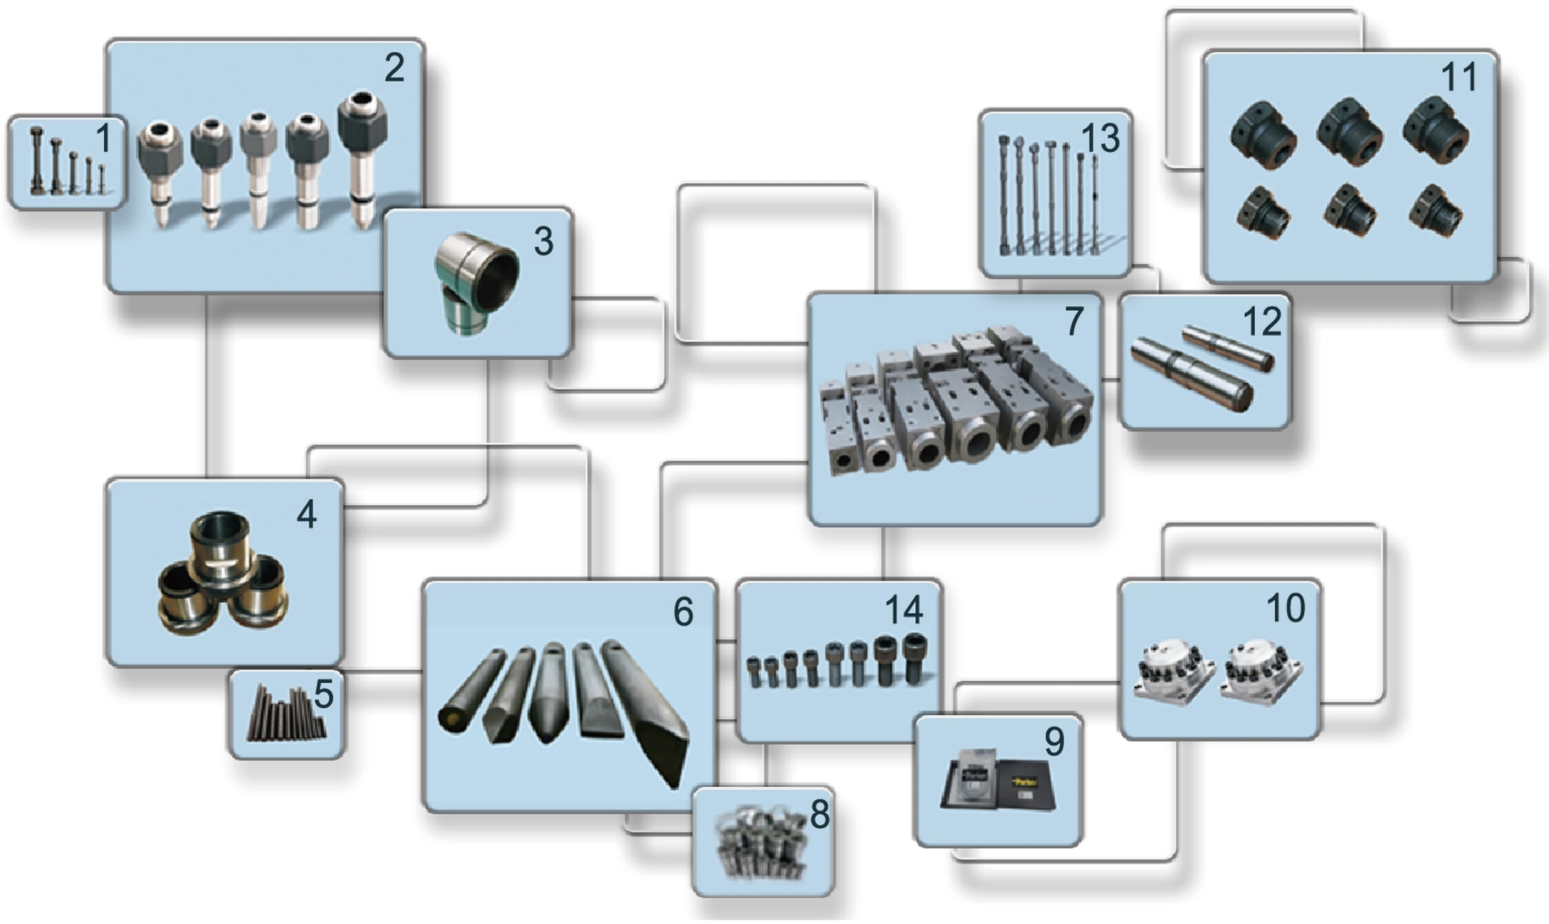


1. 夹板螺栓Side bolt
2. 充气阀Charging valve
3. 内套Inner bush
4. 外套Outter bush
5. 圆销Round pin
6. 钎杆Chisel
7. 上下缸体Front&back head
8. 换向阀Valve
9. 油封Seal kit
10. 蓄能器Accumulator
11. 排气阀Air check valve
12. 活塞Piston
13. 贯穿螺栓Through bolt
14. 蓄能器螺丝Accumulator nuts





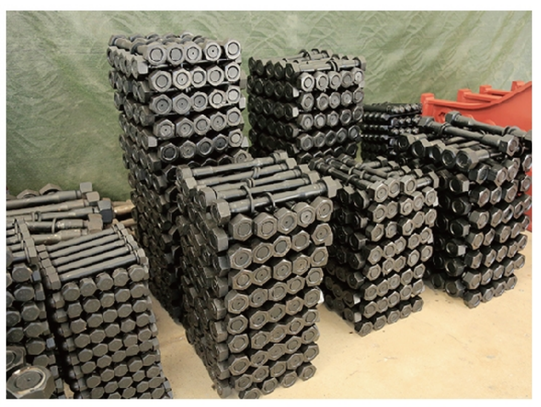


破碎锤生产率 HYDRAULIC BREAKER EXCAVATOR PRODUCTIVITY RATE(BREAKER CAPACITY)

生产率/ Productivity	Unit	400	450	530	680	750	850	1000	1350	1400	1550	1650	1750	1800	1900
非钢筋混凝土 Non-Rein-Forced Concrete(t:30cm)	m³/8hr	2-5	4-8	8-16	20-25	20-50	20-55	30-60	90-200	100-220	250-400	300-550	300-700	350-800	380-950
钢筋混凝土Reinforced Concrete(t:30cm)	m³/8hr	4-16	6-23	12-45	30-75	30-80	30-85	50-110	120-300	150-350	300-600	300-720	300-750	350-950	380-1050
硬石 Hard Rock	m³/8hr	8-20	12-30	24-60	60-100	60-105	60-110	90-200	200-420	220-450	400-800	400-900	450-930	500-1050	550-1150

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com