山东路得威工程机械制造有限公司
SHANDONG ROADWAY CONSTRUCTION MACHINERY MANUFACTURING CO., LTD.
High-Tech Zone Jining Shandong China. **TEL:86-537-2239258 FAX:86-537-5160603** E-mail: roadway@163.com

Walk-behind double drum road roller RWYL34BCT（Hydraulic steering）



World leading hydrostatic driving system guarantees stepless speed control to achieve outstanding compaction result



All function integrated in steering rod head





Hydraulic steering system offers easy operation

American brand double drive motor

山东路得威工程机械制造有限公司
SHANDONG ROADWAY CONSTRUCTION MACHINERY MANUFACTURING CO., LTD.
High-Tech Zone Jining Shandong China. **TEL:86-537-2239258 FAX:86-537-5160603** E-mail: roadway@163.com

Type	RWYL34BCT
Run	
Speed	0—3.5km/h (Forward and back)
Turning angle	15°
Climbing capacity in theory	30%
Compaction	
Static load forward/back	60.7/65.7N/cm
Nominal amplitude	0.5mm
Vibration frequency	65Hz
Exciting force	17kN
Water tank volume	38L
Working	
Drive	Variable plunger pump ,constant displacement hydraulic motor
Vibration	Mechanical drive, electromagnetic clutch
Turning	Hydraulic steering
Engine	
Model	186F
Type	Diesel engine, air cooled, 4stroke, vertical type, single cylinder
Power	8.0hp/3600rpm
Fuel tank volume	5.5L
Lubricant L	1.65L
Fuel consumption	280g/kWh
Dimension	
Width of steel wheel	680mm
Diameter of steel wheel	355mm
Tread	650mm
Total length(keep handrail level)	2460mm
Total width	732mm
Total height(keep handrail	1800mm
Packing size	1450x854x1416mm
Weight	
Working weight	860kg

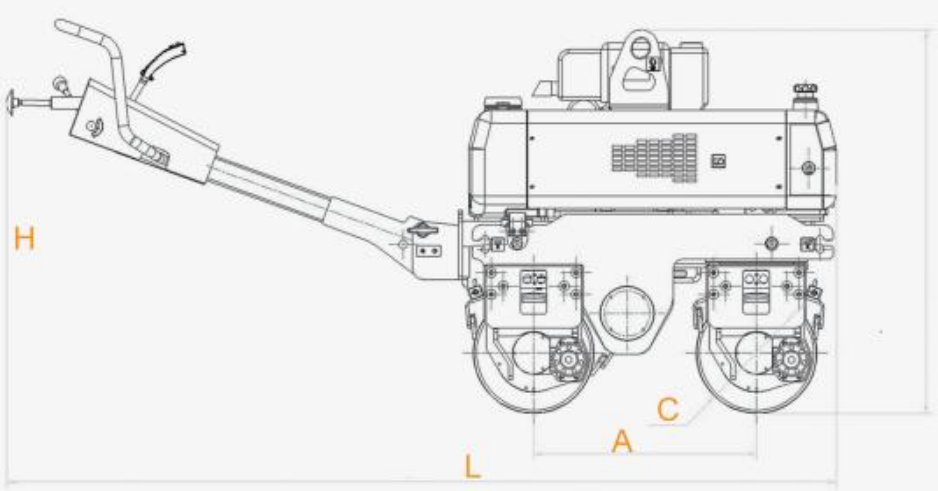

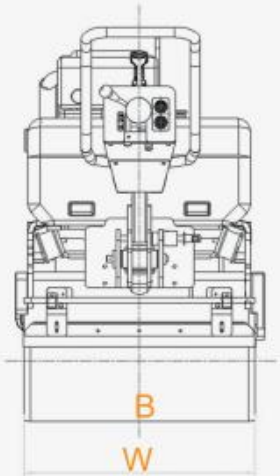

ROADWAY山东路得威工程机械制造有限公司
SHANDONG ROADWAY CONSTRUCTION MACHINERY MANUFACTURING CO., LTD.
High-Tech Zone Jining Shandong China. **TEL:86-537-2239258 FAX:86-537-5160603** E-mail: roadway@163.com

Wheelbase	A	650mm
Width of steel wheel(Forward and Reverse)	B	680mm
Diameter of steel wheel(Forward and Reverse)	C	355mm
Total length	L	2460mm
Total width	W	732mm
Total height	H	1800mm
Packing size		1450x854x1416mm