山东路得威工程机械制造有限公司
SHANDONG ROADWAY CONSTRUCTION MACHINERY MANUFACTURING CO., LTD.
High-Tech Zone Jining Shandong China. **TEL:86-537-2239258 FAX:86-537-5160603** E-mail: roadway@163.com

Ride- on Concrete Trowel RWMG236B

It is used to extract slurry, compact, smooth and polish the concrete surface.



Blade angle adjustment mechanism is hydraulically controlled



with sealed cover without cleaning



HONDA engine, excellent performance, easy to start-up;
The transmission is with big modulus and al-alloy case, free from maintenance;
Trowel supporting arm is made of heat-treated steel with super diameter carbon structure;
Scientific designed centrifugal clutch gear unit with large torque and long life;
Adjusting height mechanism of handrail, storage erectly, easy to transport;
Plastic treated, anti-rust, anti-corrosion and beautiful.


ROADWAY 山东路得威工程机械制造有限公司
SHANDONG ROADWAY CONSTRUCTION MACHINERY MANUFACTURING CO., LTD.
High-Tech Zone Jining Shandong China. **TEL:86-537-2239258 FAX:86-537-5160603** E-mail: roadway@163.com



Accelerator pedal is professional designed, control flexible




Machine transitions

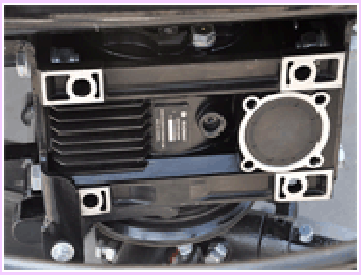

Reduction box worm is through special heat treatment, the turbine is made of imported exclusive materials



Special designed trailer for transitions, compact and convenient

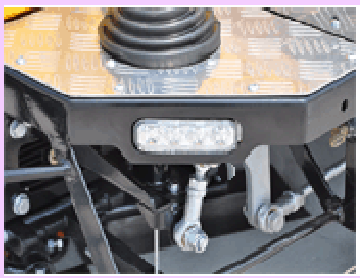

With LED energy-saving, high brightness lamp, embedded installation to make all round protection



Plastic water tank to anti-rust and beautiful

Type	RWMG236B
Working	
Operation mode	Ride-on
Working width	75in
Working speed	80-150rmp
Blade	
Blade quantity	8
Blade size	350x150mm
Fixed hole distance	4.75 in
Engine	
Model	HONDA GX690
Type	Gasoline engine， air cooled, 4stroke, OHV, double cylinder
Power	22.5hp/3600rpm
Fuel tank volume	15L
Lubricant L	1.9L
Fuel consumption	313g/kWh
Dimension	
Total length	2060mm
Total width	1030mm
Total height	960mm
Packing size	2140x1100x1100mm
Weight	
Weight	340kg
FOB Qingdao	