
山东路得威工程机械制造有限公司
SHANDONG ROADWAY CONSTRUCTION MACHINERY MANUFACTURING CO., LTD.
High-Tech Zone Jining Shandong China. **TEL:86-537-2239258 FAX:86-537-5160603** E-mail: roadway@163.com

Remote control trench roller RWYL202C



Reliable radio remote control eliminates problems caused by intense light or the simultaneous use of other machines

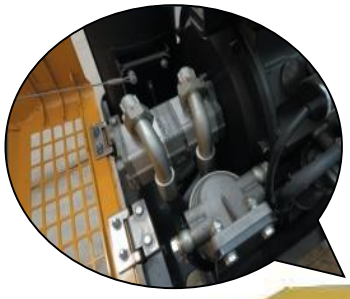

World leading hydrostatic driving system guarantees stepless speed control to achieve outstanding compaction result





Multi-purpose compactor achieves outstanding compaction result at various site condition,compaction in trenches,sewers or pipeline construction




The working width can be easily changed between 600 and 850mm with the drum extension

ROADWAY 山东路得威工程机械制造有限公司
SHANDONG ROADWAY CONSTRUCTION MACHINERY MANUFACTURING CO., LTD.
High-Tech Zone Jining Shandong China. **TEL:86-537-2239258 FAX:86-537-5160603** E-mail: roadway@163.com

Type	**RWYL202C**
Run	
Speed	1.2km/h(low) 2.4km/h(high)
Turning radius	1700mm
Climbing capacity in theory	50%
Compaction	
Static load forward/back	98/90N/cm
Nominal amplitude	1.7mm
Vibration frequency	42Hz
Exciting force	70kN/35kN(Hydraulic control)
Engine	
Model	Yanmar
Type	Diesel engine, water cooled, 4stroke, three cylinder
Power	17.8kw/3000rpm
Fuel tank volume	30L
Lubricant L	2.2L
Fuel consumption	286g/kWh
Dimension	
Width of steel wheel	600mm/850 mm
Diameter of steel wheel	520mm
Tread	1000mm
Total length	1900mm
Total width	850mm
Total height	1300mm
Packing size	2184x1030x1520mm
Weight 重量	
working weight	1635kg

ROADWAY山东路得威工程机械制造有限公司
SHANDONG ROADWAY CONSTRUCTION MACHINERY MANUFACTURING CO., LTD.
High-Tech Zone Jining Shandong China. **TEL:86-537-2239258 FAX:86-537-5160603** E-mail: roadway@163.com

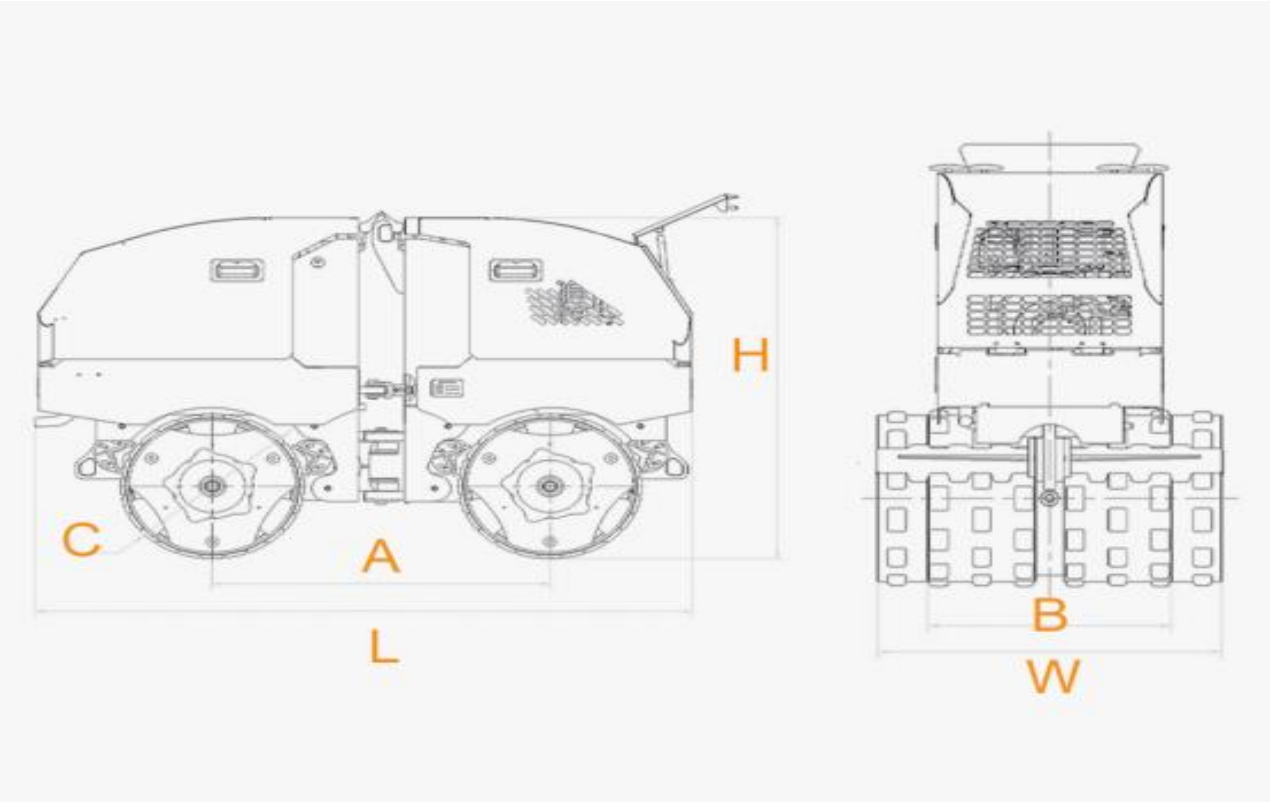

Wheelbase	A	1000mm
Width of steel wheel(Forward and Reverse)	B	600/850mm
Diameter of steel wheel(Forward and Reverse)	C	520mm
Total length	L	1900mm
Total width	W	850mm
Total height	H	1300mm
Packing size		2184x1030x1520mm