NARAN

专业汽配卡箍制造商







天津市昱达机械有阻公司

www.yudahoseclamp.com

公司简介

天津市昱达机械有限公司成立于2008年，总部位于天津静海区，占地面积20,000平方米，拥有专业生产团队30人。作为一家集研发、生产、销售于一体的汽配紧固件制造商，公司产品远销欧洲、北美、澳大利亚、南美等30多个国家和地区，年营业额突破400万美元。

我司设有两处生产车间。其一为汽车排气卡箍生产车间，专注高端汽配紧固件生产，主要产品包括涡轮增压排气卡箍、V型沟槽卡箍、T型卡箍等；第二车间主要生产常规卡箍系列，涵盖单头强力卡箍、德式/美式卡箍、重型卡箍等。

在质控方面， 我们有严格的质量管理体系，专业的实验室工作人员和质检人员，配备材质和硬度检测仪、拉力扭矩测试仪、盐雾试验机等专业设备，确保从生产到交货的产品质量的可靠性。

我司一直致力于产品创新，拥有高精度模具生产设备及成熟研发团队，在非标定制领域具备显著优势，可快速响应客户个性化需求。

我司秉承"持续创新，以技术为核心，视质量为生命，视客户为上帝"的宗旨，公司不断优化生产工艺，提升产品竞争力。未来，我们将继续深耕汽配紧固件领域，为客户提供更优质的产品与服务，致力成为全球供应链中值得信赖的合作伙伴。








厂房概览



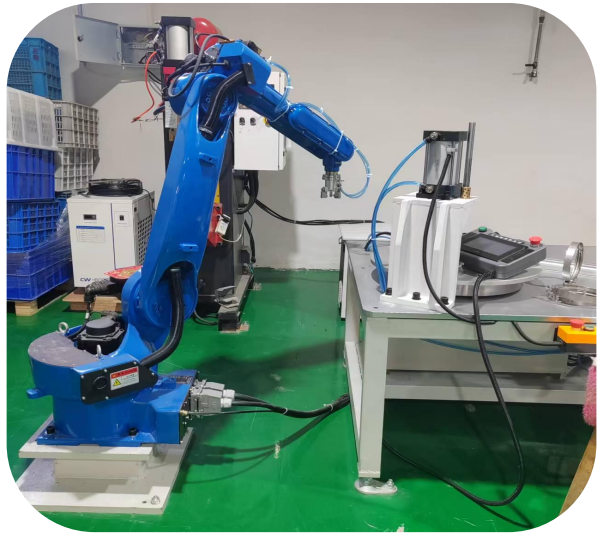









厂房概览







企业荣誉



AENOR

IATF 16949 Certificate

AENOR
QUALITY IN AUTOMOTIVE SECTOR
IATF 16949

RA02-1008/2025
IATF: 0590524

AENOR certifies that the organization

TIANJIN YUDA MACHINERY CO., LTD

has a quality management system according to the IATF 16949:2016 Standard

At the following site of production: 50 METERS WEST OF THE TRAFFIC CONSTRUCTION COMPANY, NANYUANMENGKOU VILLAGE, YANZHIANG TOWN, JINGHAI DISTRICT. 301600 - TIANJIN (China)
IATF USI: CZ4CCS

For the following activities: Manufacturing of exhaust pipe clamps

Exclusion: Product design

Remote location: See Annex

First Issued on: 2025-12-01
Validity date: 2028-11-30

Rafael GARCÍA MEIRO
CEO

AENOR CONFIA, S.A.U.
Génova, 6. 28004 Madrid. España
Tel. 91 432 60 00. - www.aenor.com

Page 1 of 2

ISO9001

QUALITY MANAGEMENT SYSTEM CERTIFICATE

Certificate No.: 04626Q01426R201

We hereby certify that the organization:

Tianjin Yuda Commercial and Trading Co., Ltd.

Unified social credit code: 91120223MA06AXQK67

is in conformity with Quality Management System Standard:
GB/T 19001-2016/ISO 9001:2015
Quality management systems—Requirements

The certificate is valid to the following product(s)/service:
Manufacturing of Fasteners (Turbocharger Compensator Clamps, Exhaust Pipe Clamps, V-band Clamps, Germany Bias Hose Clamps, Quick Install Clamps, Worm Gear Clamps, Worm Gear Clamps with Handle, Single Bolt Clamps, T Bolt Clamps, Mini Clamps, P Type Hose Clamps, Ear Clamps)

Registration Address/ Physical Address: (100m West of Tenghuiyuan Fastener Co., Ltd.) North of Yuanmengkou Village, Yanzhuang Town, Jinghai District, Tianjin, P. R. China

Date of Issue：2026-04-01
Date of Expiry：2029-03-31
Date of Initial Issue：2020-04-03

Issued By: MENG JIANJUN

IAF CNAS 中国认可 国际互认 管理体系 MANAGEMENT SYSTEM CNAS C046-M

Beijing Head International Certification Co.,Ltd. Certificates Appropriation

The effectiveness of the Certificate is subject to QR Code in the lower left corner. Meanwhile, you can search the CNCA website: www.cnca.gov.cn, or search the website of certification body: www.hicchina.com.cn. Surveillance conclusion notice and audit report can obtain from HIC website: www.hicchina.com.cn. Note: Certified client shall receive surveillance audit within the validity period, the certificate shall only be valid when used in conjunction with the Notice Letter of Annual Surveillance Certification Decision.

Beijing Head International Certification Co., Ltd.

Address:Room 701,Building 7,No.19,Beiyuan East Road ,Chaoyang District,Beijing.P.R.China(100012)



Beide Compliance Laboratory

RoHS TEST REPORT

Report No. : B-R2210A3567 Date: 2022-10-25 Page 1 of 8

Applicant : Tianjin Yuda Commercial and Trading CO., LTD

Address : Room 916, Building C, Haihaixinxi Square, Xiqing district, Tianjin, China

Report Query

Client ID : CA2208

Manufacturer : Tianjin Yuda Machinery CO., LTD

Address : No.4 Yuanmengkou Industrial Park, Yanzhuang Town, Jinghai District, Tianjin, China

RoHS

Report on the submitted sample said to be

Sample Name : hose clamp

Model No. : 0588, 0586, 0677

Sample Model : 0588

Sample Received Date : 2022-10-19
Complete Date : 2022-10-25

Test Requested : As specified by client, to determine the Cadmium, Lead, Mercury, Hexavalent Chromium, PBBs / PBDEs, Bis-(2-ethylhexyl) Phthalate (DEHP), Diisobutyl phthalate(DIBP), Dibutyl Phthalate (DBP) & Benzylbutyl Phthalate (BBP) content in the submitted sample.

Test Result(s) :Conform to RoHS Directive 2011/65/EU Annex Ⅱ amending Annex (EU)2015/863 and amending Annex (EU)2017/2102.

*****FOR FURTHER DETAILS, PLEASE REFER TO THE FOLLOWING PAGE(S)*****

Written by: (Chen Qin) Inspected by: (Austin Zhang) Approved by: (Martin Wang)

Beide

This report is considered invalidated without the Special Seal for Inspection of the Beide (Shenzhen) Product Service Limited. This report shall not be altered, increased or deleted. The results shown in this test report refer only to the sample(s) tested. Without written approval of Beide (Shenzhen) Product Service Limited, this test report shall not be copied except in full and published as advertisement.

BEIDE (Shenzhen) Product Service Limited
Address: 9F, Bldg C, Haoxia 3rd Ind Zone, Xixiang, Bao'an Dist, Shenzhen, China
E-mail: a.dmin@szbeide.com Phone: +86 0755 2745 4498 www.szbeide.com



TEST REPORT

Report No. : WTF25F04097177C
Job No. : FSW2504170837CJ
Applicant : Tianjin Yuda Commercial and Trading Co., Ltd
Address : No.4 Yuanmengkou Industrial Park, Yanzhuang Town, Jinghai District, Tianjin, China
Sample Name : Hoop
Test Requested : Refer to next page (s)
Test Method : Refer to next page (s)
Test Conclusion : Refer to next page (s)
Date of Receipt Sample : 2025-04-17
Testing Period : 2025-04-17 to 2025-04-24
Date of Issue : 2025-04-24
Test Result : Refer to next page (s)

WALTEK





Prepared By:
Waltek Testing Group (Foshan) Co., Ltd.
Address: No.13-19, 2/F., 2nd Building, Sunlink Machinery City, Xingye 4 Road, Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun, Shunde District, Foshan, Guangdong, China
Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Signed for and on behalf of Waltek Testing Group (Foshan) Co., Ltd.

Swing Liang
Waltek Testing Group (Foshan) Co., Ltd.
http://www.waltek.com.cn


1 / 10

检测设备


 X射线涂层厚度仪	 金属元素分析仪	 拉力机	 盐雾试验机
 硬度测试仪	 扭矩测试仪	 轮毂转速和硬度测试仪	 MMD-100JS 轮廓仪
 震动测试仪	 六点式强度测试机	 水压、气压、震动测试机	 同心度测试仪

V型卡箍类型


A

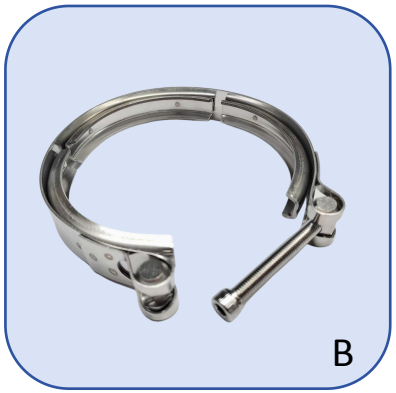
B


C

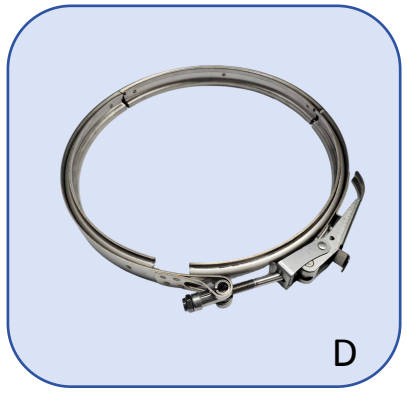
D


E


F


G


H


I


J

V型卡箍紧固方式


图片	类型描述	功能介绍
 A	螺栓锁具	此种锁具用于永久或半永久应用中或安全加压系统中，是最常用的、经济实惠的锁具。
 B	快速释放锁具	此锁具易于拆卸
 C	快速释放锁具	此锁具易于拆卸
 D	快速释放锁具	此锁具易于拆卸
 E	快速释放锁具	此锁具易于拆卸，并且可以按照要求用T型螺栓来代替。
 F	鞍座式快速释放锁具	此锁具易于拆卸，也可按要求替换螺栓
 G	收紧旋钮锁具	不需要借助工具，易于安装拆卸
 H	快速释放锁具	此锁具易于拆卸
 I	普通螺栓锁具	此种锁具用于永久或半永久应用中或安全加压系统中，是最常用的、经济实惠的锁具。
 J	整体类型	具有更强抗压能力

V型卡箍槽型


优势与亮点

- 引进先进沟槽设备
- 精选原材料、源头工厂
- 目前已有23种槽型满足市场需求
- 接受客户个性化定制
- 紧固范围最大可做到20 "


VSS0001

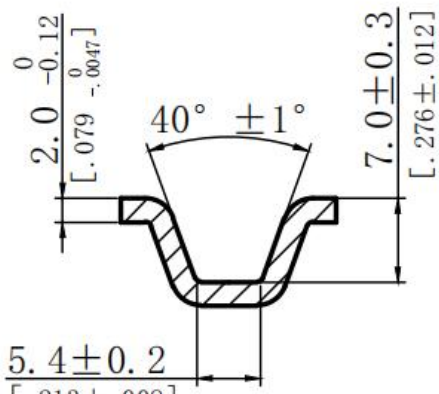


VSS0002

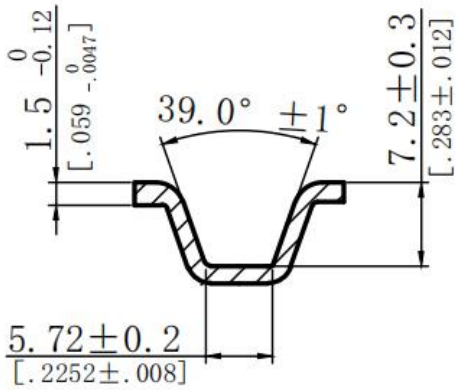


VSS0003

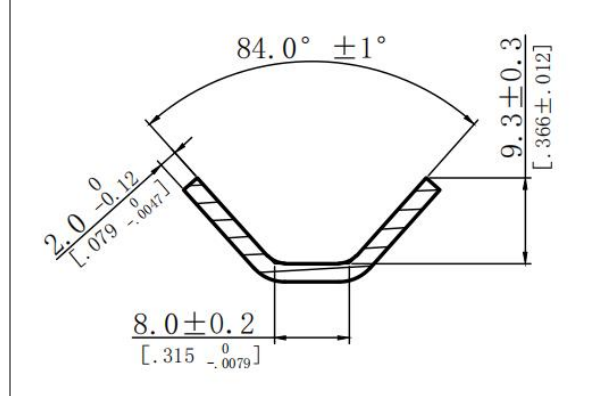


VSS0004

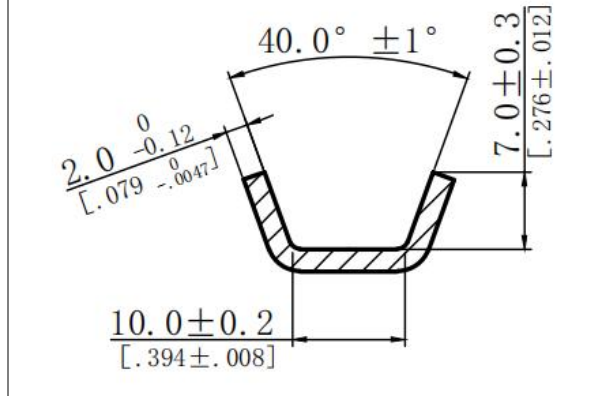


VSS0005

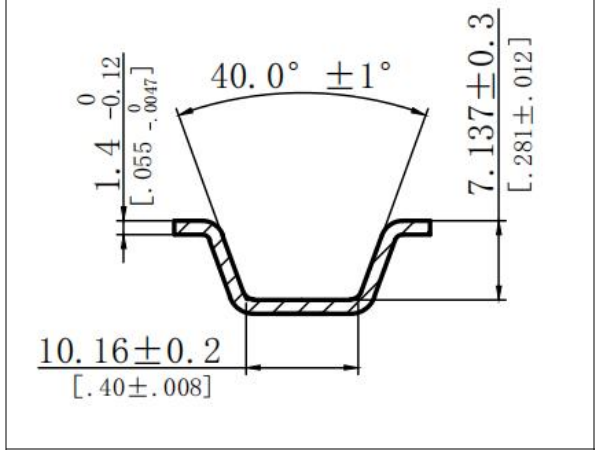


VSS0006

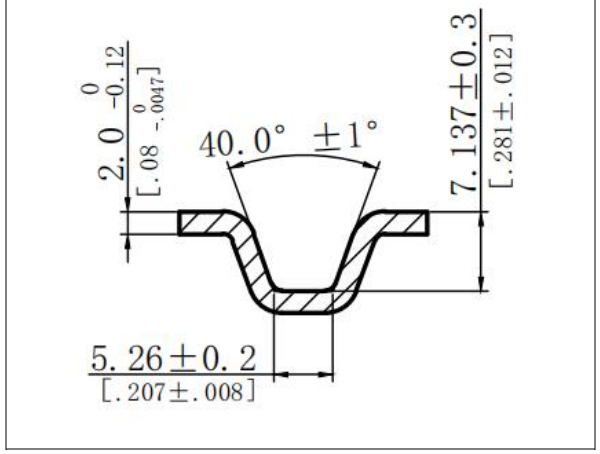


VSS0007

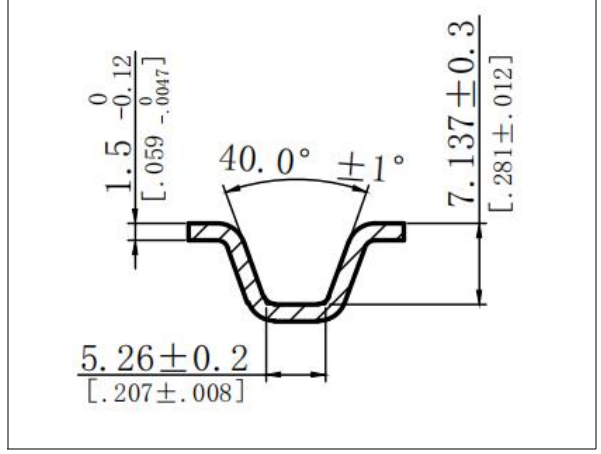


VSS0008

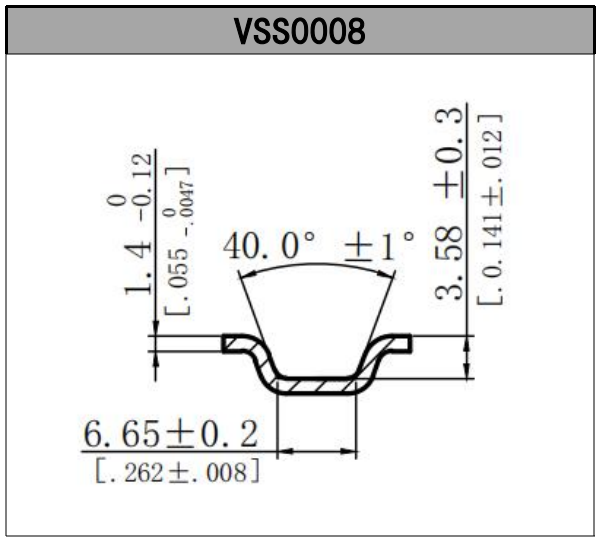


VSS0009

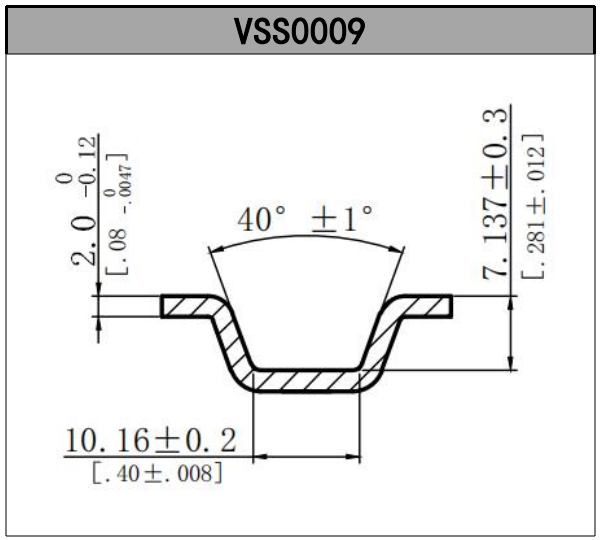


VSS0010

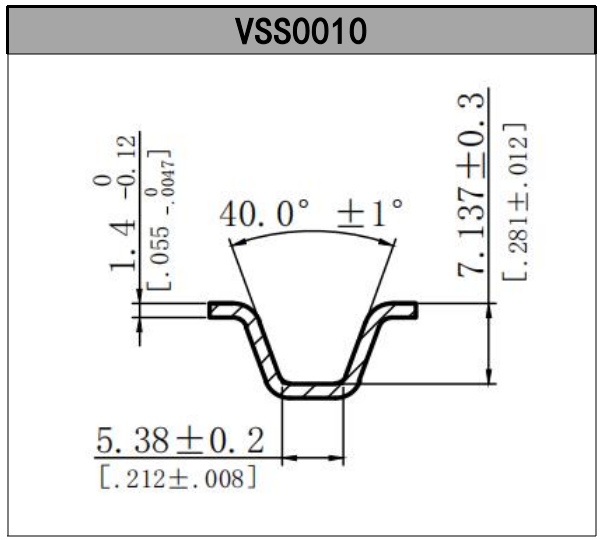


VSS0011

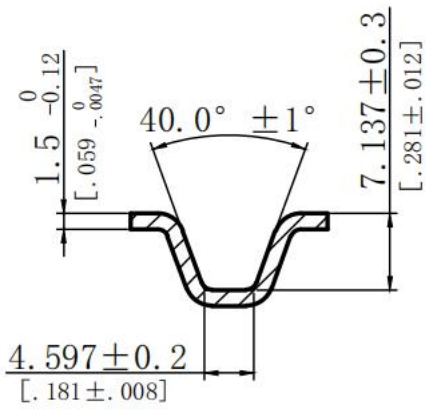


VSS0012

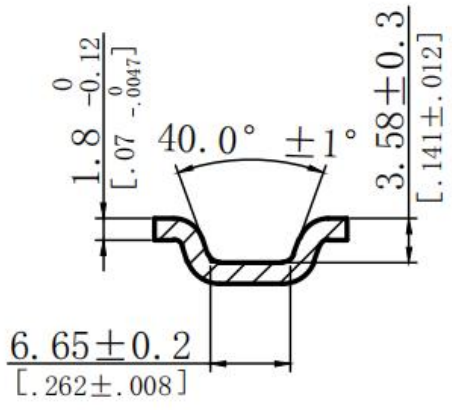


VSS0013

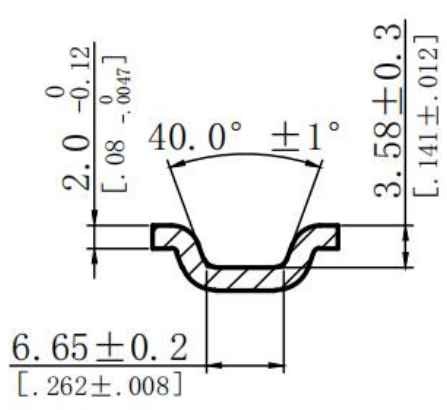


VSS0014

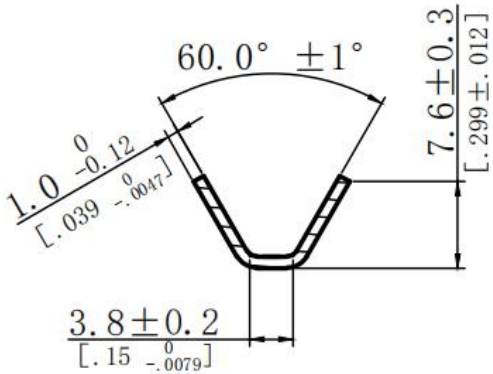

VSS0015

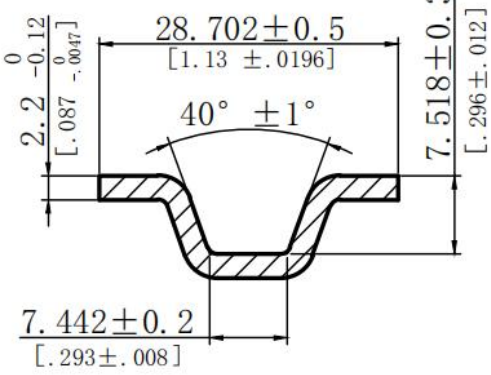


VSS0016

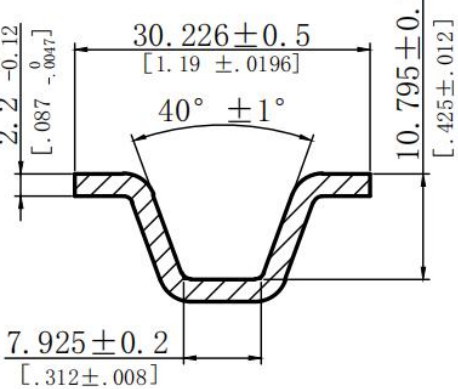


V型卡箍槽型


VSS0017

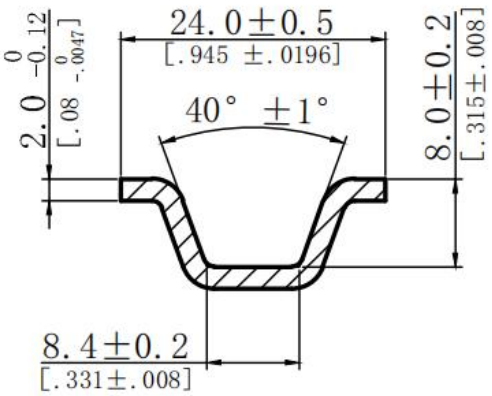


VSS0018

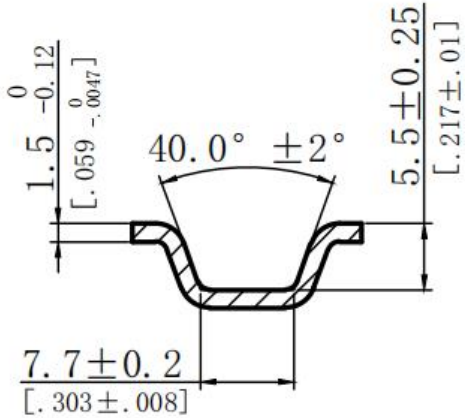


VSS0019

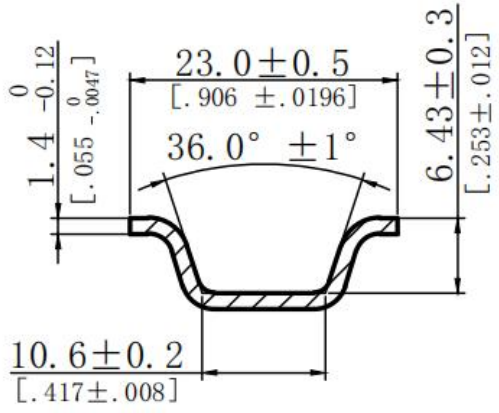


VSS0020

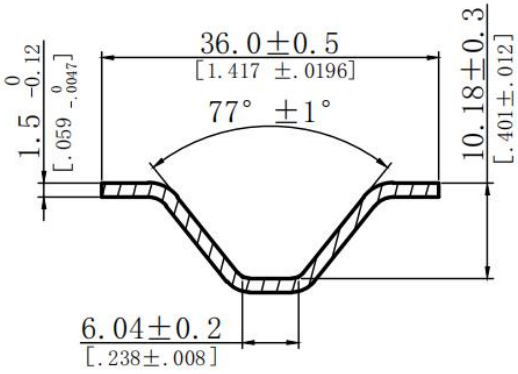

VSS0021

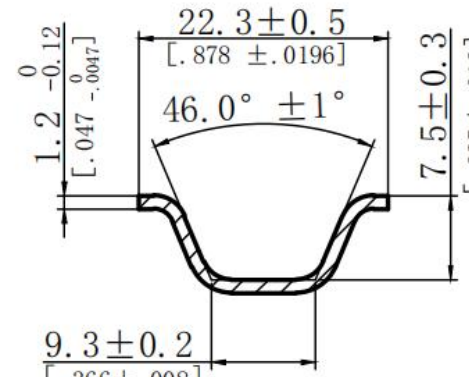


VSS0022

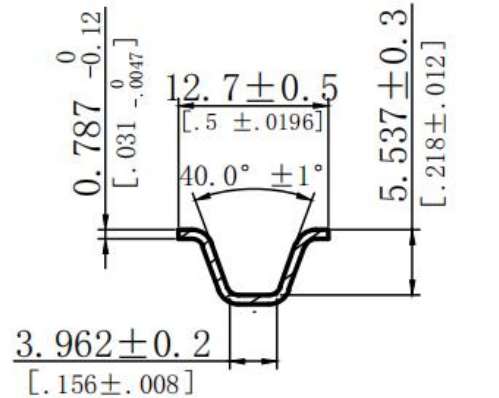

V型卡箍槽型

VSS0023

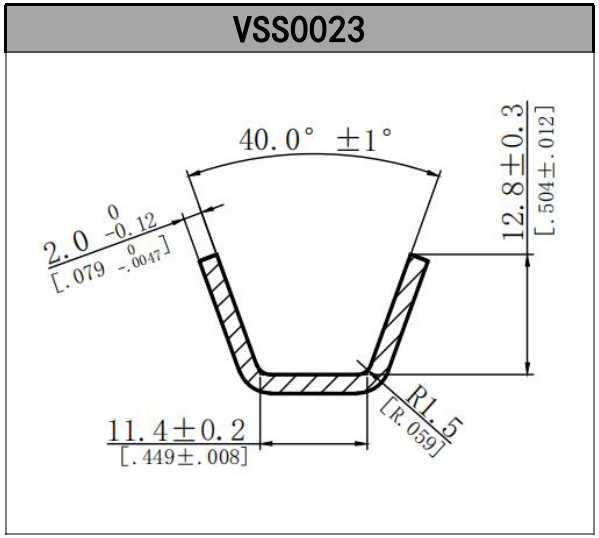

昱达会开发更多的槽型
敬请期待

可选带条	带宽(mm)	16	17	19	19	22	22	25
	带厚(mm)	0.6	1.5	1.0	1.2	1.0	1.2	1.5



法兰内径



卡箍内径

V型卡箍螺栓

法兰内径（inch）	法兰内径(mm)
1.5"	38.9
1.75"	45.2
2.0"	51.6
2.25"	57.9
2.36"	60.5
2.5"	64.3
2.75"	70.6
3.0"	77
3.25"	83.3
3.5"	89.7
4.0"	102.4
4.5"	115.1
5.0"	127.8
6.0"	153.2
最大20"	508

卡箍内径（mm）	卡箍内径（mm）
60.3	61.4
67	68.2
72.6	75.6
78.9	81.9
81.5	84.5
85.3	88.3
91.6	94.6
98	101.0
104.5	107.3
110.7	113.7
123.4	126.4
136	139.1
149	151.8
174	177.2
最大20"	

图片	螺栓描述
	不锈钢

螺纹尺寸	1/4-28	5/16-24
推荐扭矩IN.-LBS	75[8.5]	180[20.3]
极限拉伸强度LBS	3322[1508]	5320[2414]

注：可根据客户需求提供更多尺寸和材质。以上数据仅供参考。

V型卡箍螺母

图片	螺母描述	螺母尺寸		是否自锁
	尼龙内嵌螺母	1/4-28	5/16-24	是
	开槽自锁螺母	1/4-28	5/16-24	是
	机加工螺母，镀锌	1/4-28	5/16-24	否
	不锈钢六角螺母	1/4-28	5/16-24	否
	不锈钢六角法兰螺母	1/4-28	5/16-24	否
	不锈钢六角螺母（镀银）	1/4-28	5/16-24	是
	手紧旋钮，钢材质	1/4-28	5/16-24	否

V型卡箍可选材质

昱达V型卡箍为了适应广大消费市场的需求，可以提供如下材质，消费者可以根据自己使用环境选用，以达到更好的使用效果。


材质	长期耐温	适用卡箍位置	优缺点
321 (1Cr18Ni9Ti)	650° C-850° C	增压器排气端、排气管前段	性价比最高，原厂主流标:配，抗蠕变强
304SS	0° C-400° C	后处理 DPF/SCR低温管路	温度超过400° C易晶间腐蚀松脱，不可用于涡轮端
310S(2520)	950-1100° C	排气歧管、涡轮出口超高温区	耐温最强，价格翻倍，重载矿机/发电机组选用

排气卡箍简介



特性与优势

1. 360° 反作用力块：确保均匀的拉伸力分布，消除管道变形，并完全密封接头。
2. 高夹紧力：实现牢固连接，不会造成排气管永久变形。
3. 预装配设计：简化安装和维修。
4. 扭矩规格：拧紧至 40-60 英尺磅 以获得最佳性能。
5. 可重复使用：易于拆卸和重新安装。

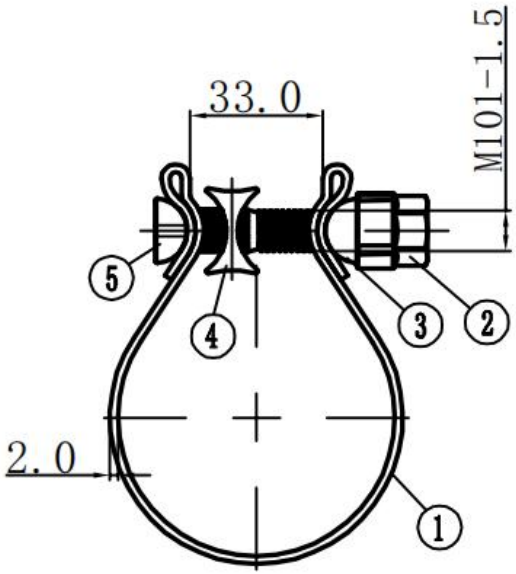

图片	部件	材质				表面处理	
	⑤	40Cr				达克罗	
	④	Q235				镀锌	灰色达克罗
	③	Q235				镀锌	
	②	40Cr				镀锌	
	①	DX53D+AS80	430SS	409SS	304SS	镀锌镍合金	镀铝锌


紧固范围												
英寸	1-3/4	2	2-1/4	2-1/2	2-3/4	3	3-1/2	4	4-1/2	5	6	7
毫米	44.5	50.8	57.2	63.5	69.9	76.2	88.9	101.6	114.3	127.0	152.4	177.8


排气卡箍简介



特性与应用：

1. 采用预安装配件
2. 配备高强度 8 级螺栓
3. 304 不锈钢材质箍带
4. 适用于搭接式与对接式管道连接，安装简易、快速、精准
5. 常用于高性能排气卡箍、工业管道等

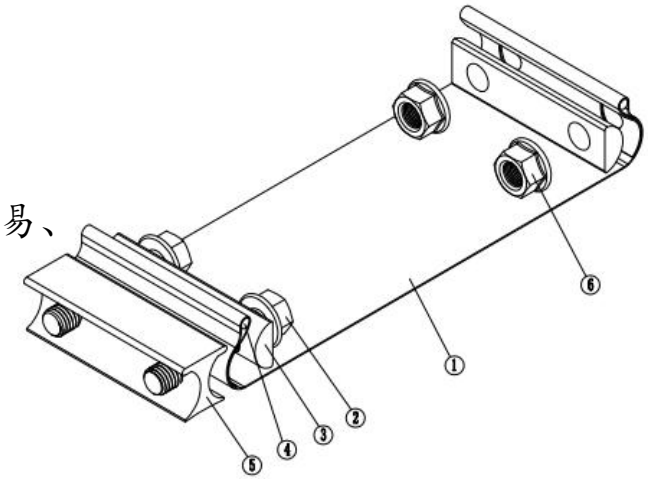


图片	部件	材质	表面处理
	⑥	40Cr	镀锌TRI
	⑤	Aluminum	/
	④	304SS	/
	③	Q235	镀锌TRI
	②	40Cr	镀锌TRI
	①	304SS	/




紧固范围												
英寸	2	2-1/4	2-1/2	2-3/4	3	3-1/2	4	4-1/2	5	6	7	8
毫米	50.8	57.2	63.5	69.9	76.2	88.9	101.6	114.3	127.0	152.4	177.8	203.2


对接式排气卡箍简介

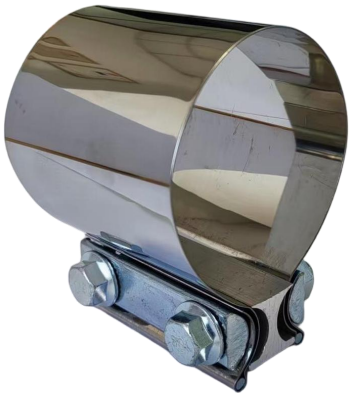

特性与应用：

1. 预组装对接式接头
2. 优异的夹紧负载能力
3. 镀铝钢与304不锈钢材质
4. 适用于管道、柔性管与消音器

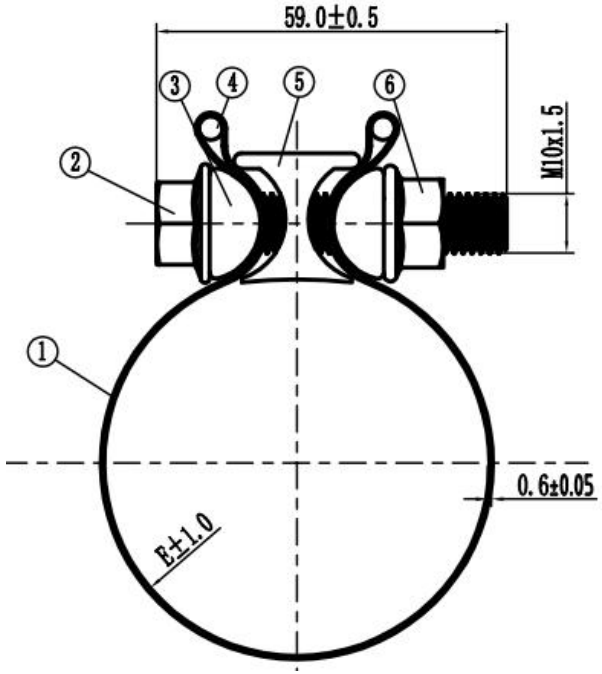

图片	部件	材质	表面处理
	⑥	40Cr	镀锌TRI
	⑤	Aluminum	/
	④	304SS	/
	③	Q235	镀锌TRI
	②	40Cr	镀锌TRI
	①	304SS/Carbon steel	NON/Aluminum plated


紧固范围									
英寸	2	2-1/4	2-3/4	3	3-1/2	4	4-1/2	5	6
毫米	50.8	57.2	69.9	76.2	88.9	101.6	114.3	127.0	152.4

搭接式排气卡箍简介



特性与应用：

1. 预组装搭接式接头
2. 出色的卡箍负载能力
3. 镀铝钢与304不锈钢材质
4. 适配管径2”-6”

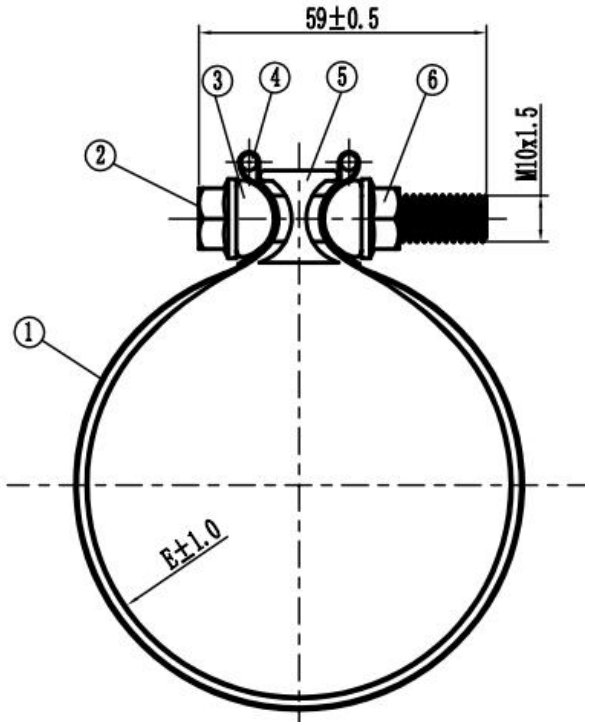

图片	部件	材质	表面处理
	⑥	40Cr	镀锌TRI
	⑤	Aluminum	/
	④	304SS	/
	③	Q235	镀锌TRI
	②	40Cr	镀锌TRI
	①	304SS/Carbon steel	NON/Aluminum plated


紧固范围										
英寸	2	2-1/4	2-1/2	2-3/4	3	3-1/2	4	4-1/2	5	6
毫米	50.8	57.2	63.5	69.9	76.2	88.9	101.6	114.3	127.0	152.4


旋转式排气卡箍简介



性能与特点：

1. 耐用的排气管接头，便于维护，同时提供高夹紧力。
2. 角度可调，最大可调 6 度，重量轻，泄漏率低，比传统球形法兰连接具有更高的扭转强度

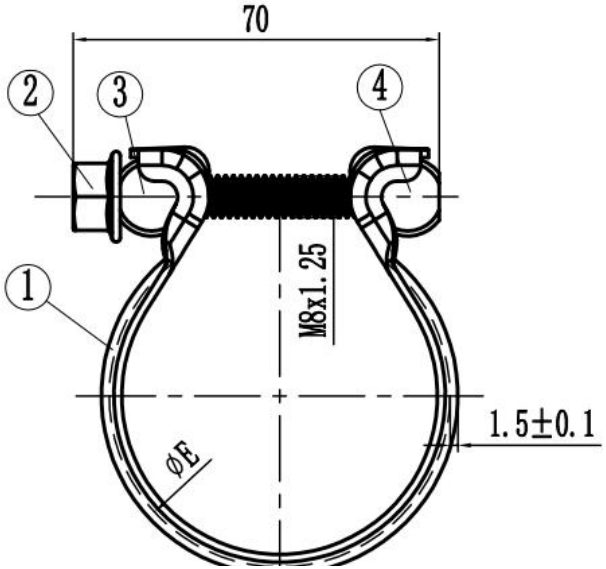

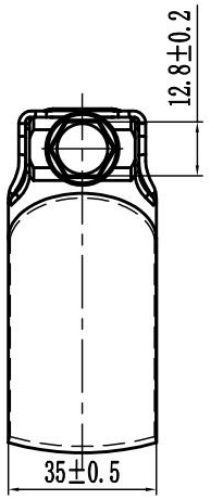

图片	部件	材质	表面处理
	④	304SS	/
	③	304SS	/
	②	10B21	MAGNI565
	①	304SS	/


紧固范围						
英寸	2	2-1/4	2-1/2	2-3/4	3	3-1/2
毫米	55	60	65	70	75	90

排气管连接器卡箍简介



性能与特点：

1. 该零件设计用于连接相同直径的排气管，包含双夹紧机构。
2. 这类连接器常见于汽车尾气系统修复，利用两侧的螺栓进行紧固。

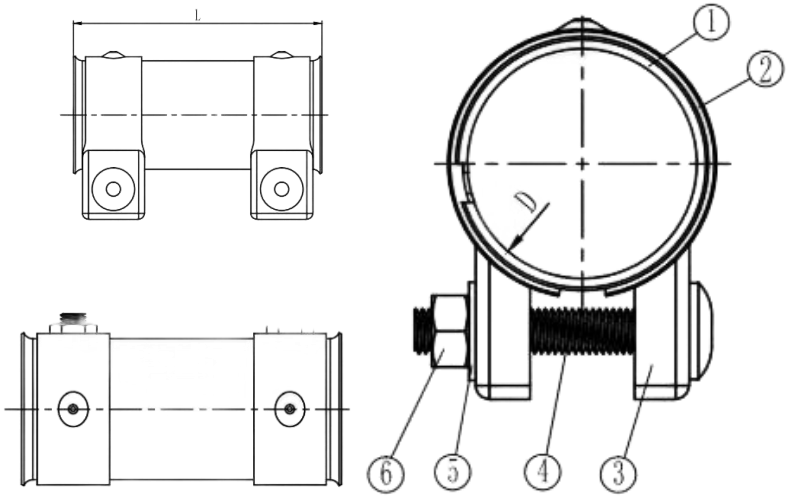


图片	编号	材质			表面处理	
	⑥	304SS		Q235	无	镀锌
	⑤	304SS		Q235	无	镀锌
	④	304SS		Q235	无	镀锌
	③	304SS		Q235	无	镀锌
	②	304SS		Q235	无	镀锌
	①	304SS	Q235	409SS	无	镀锌


产品规格													
直径	38	40	45	50	65	60	40	45	55	60	45	50	60
长度 ±5	90	80	80	80	80	80	90	90	90	90	125	125	125

排气卡箍拓展品


图片	部件	材质	表面处理
	⑥	Q235	镀锌
	⑤	40Cr	达克罗
	④	Q235	镀锌
	③	Q235	镀锌
	②	40Cr	镀锌
	①	DX53D+AS80	镀铝锌

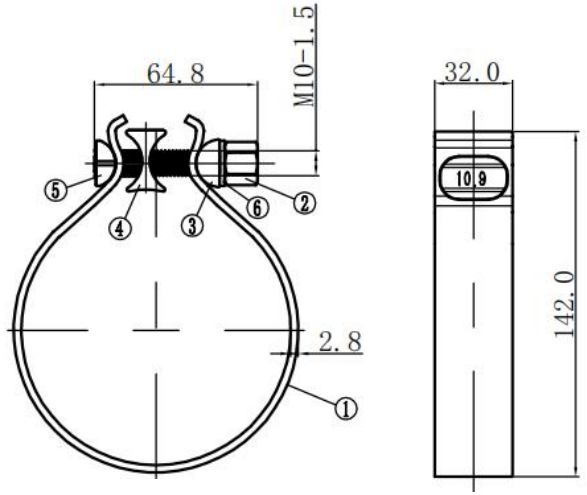


图片	部件	材质	表面处理
	⑤	40Cr	镀锌
	④	Q235	镀锌
	③	Q235	镀锌
	②	40Cr	达克罗
	①	304SS	/

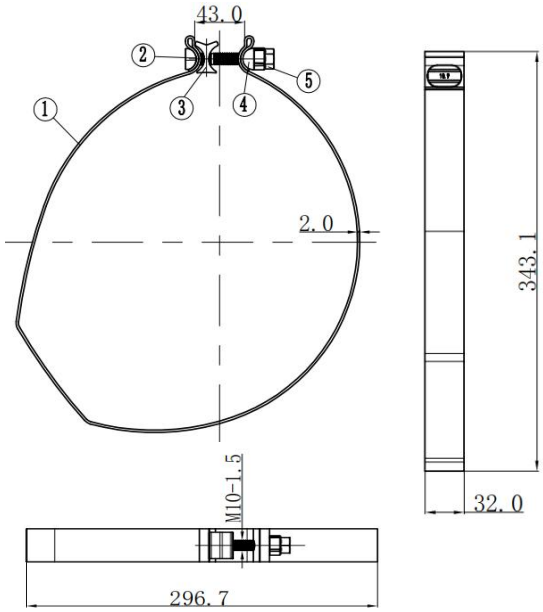


排气卡箍拓展品

图片	部件	材质	表面处理
	⑥	Q235	镀锌
	⑤	40Cr	镀锌
	④	40Cr	镀锌
	③	铝	/
	②	Q235	镀锌
	①	DX53D+AS80	镀锌

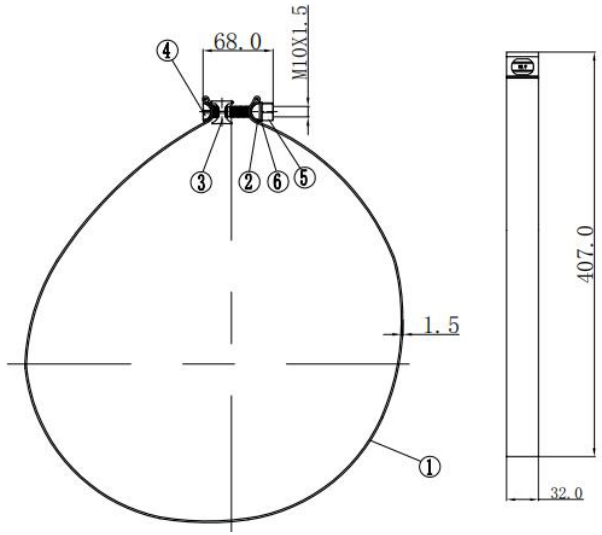



图片	部件	材质	表面处理
	⑧	40Cr	镀锌
	⑦	304SS	/
	⑥	铝	/
	⑤	Q235	镀锌
	④	Q235	镀锌
	③	40Cr	镀锌
	②	40Cr	镀锌
	①	430SS	/

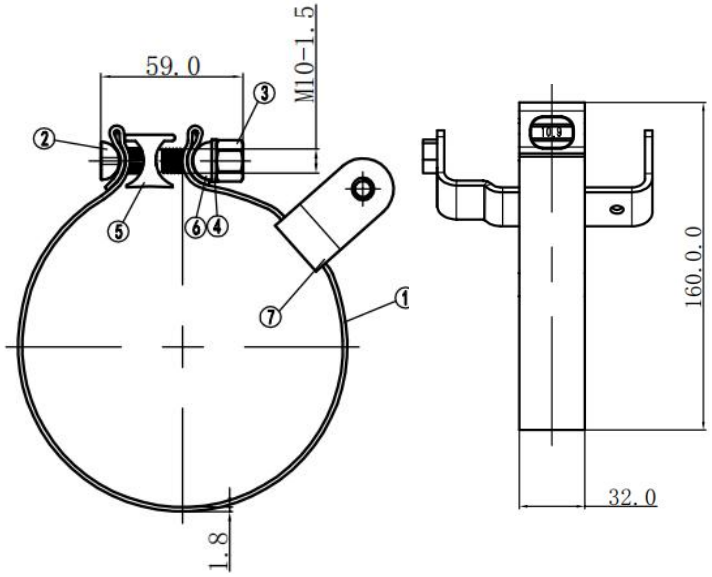


排气卡箍拓展品

图片	部件	材质	表面处理
	⑥	Q235	镀黄锌
	⑤	40Cr	达克罗
	④	Q235	镀锌
	③	Q235	镀锌
	②	40Cr	镀锌
	①	409SS	/

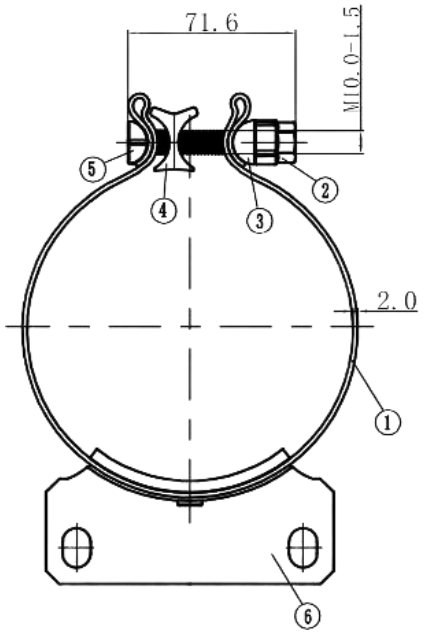



图片	部件	材质	表面处理
	⑧	40Cr	镀锌
	⑦	409SS	/
	⑥	409SS	/
	⑤	40Cr	镀锌
	④	Q235	镀锌
	③	Q235	镀锌
	②	40Cr	Dacromet Yellow Loctite 黄色乐泰胶
	①	409SS	电泳黑

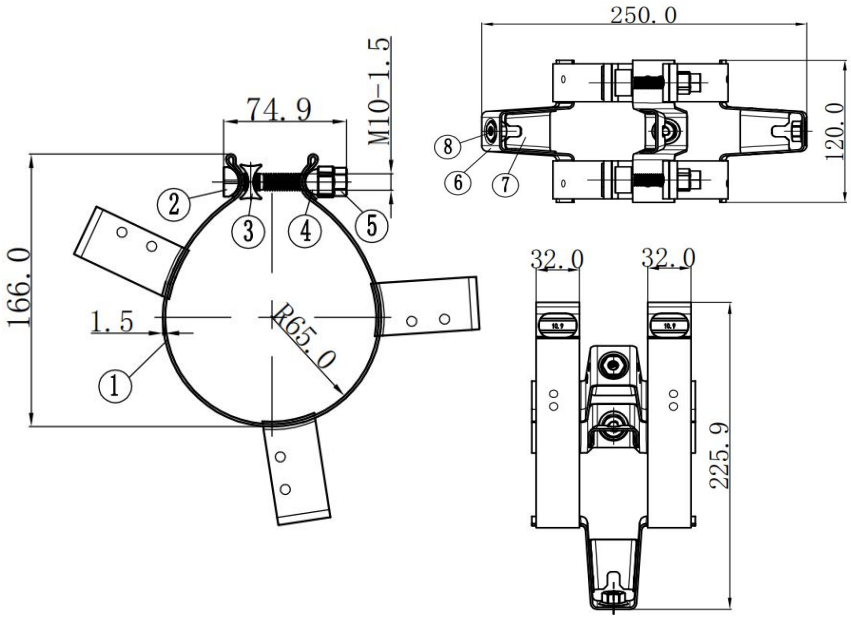


排气卡箍拓展品

图片	部件	材质	表面处理
	⑦	409SS	/
	⑥	40Cr	镀锌
	⑤	Q235	镀锌
	④	Q235	镀锌
	③	Q235	灰色达克罗
	②	40Cr	Dacromet white Loctite黄色乐泰胶
	①	409SS	/

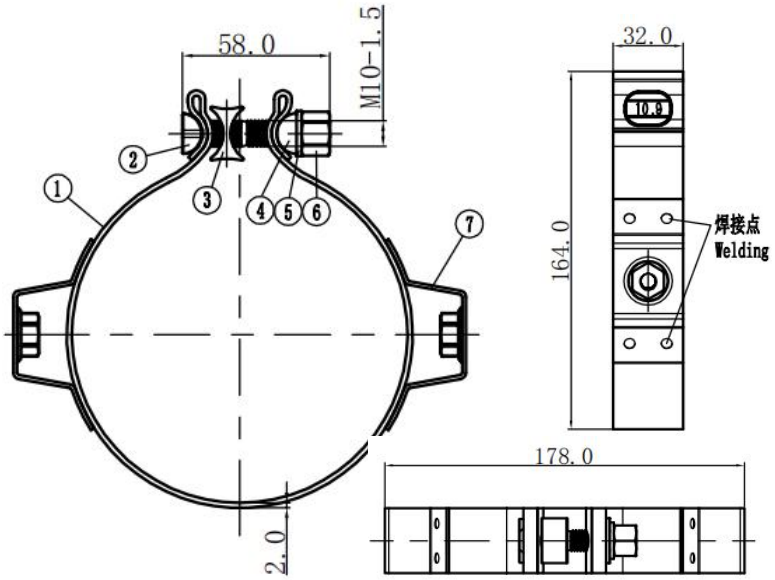


图片	部件	材质	表面处理
	⑧	40Cr	达克罗
	⑦	DX53D+AS80	镀铝锌
	⑥	铝	/
	⑤	Q235	镀锌
	④	Q235	镀锌
	③	40Cr	镀锌
	②	40Cr	镀锌
	①	DX53D+AS80	镀铝锌

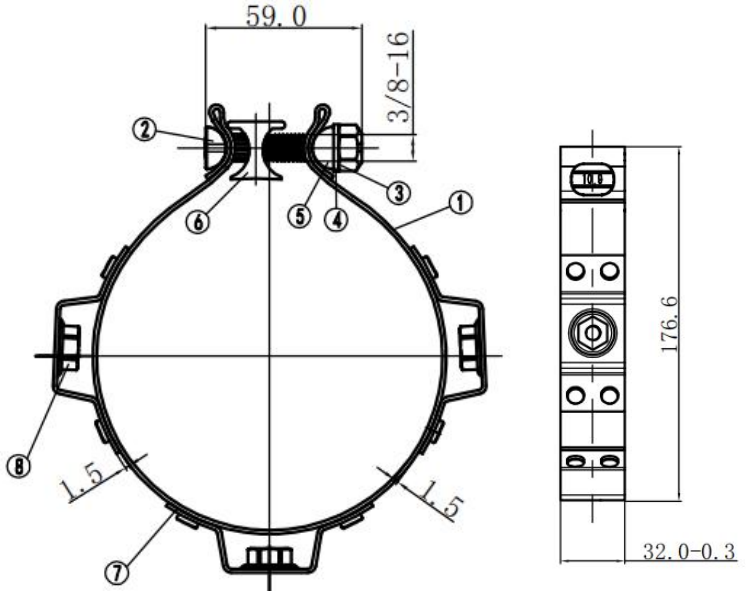


排气卡箍拓展品

图片	部件	材质	表面处理	
	⑧	CRCA sheet GB 08AL（SPCC）	镀锌镍合金	
	⑦	Q235	电泳黑	电泳灰
	⑥	40Cr	Dacromet 达克罗绿色乐泰胶	
	⑤	铝	镀锌	
	④	Q235	镀锌	
	③	Q235	镀锌	
	②	40Cr	达克罗	
	①	CRCA sheet GB 08AL（SPCC）	镀锌镍合金	

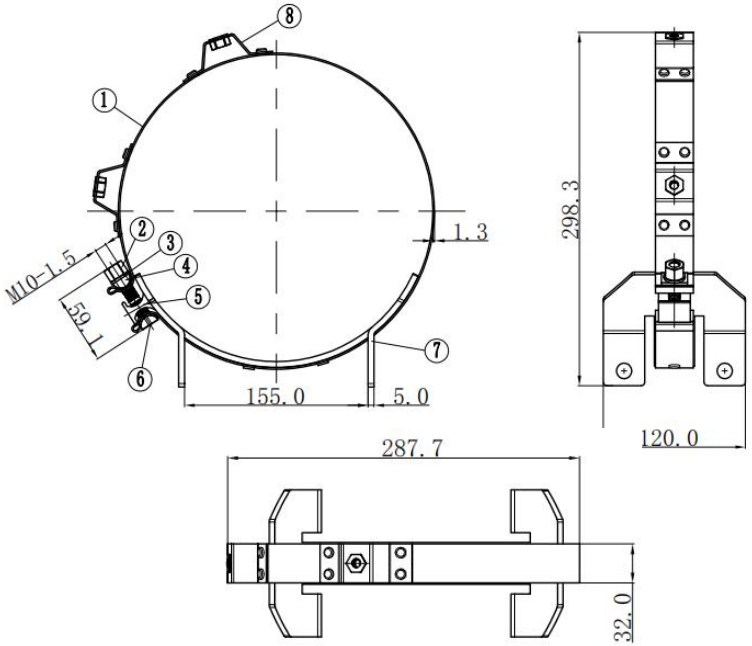


图片	部件	材质	表面处理
	⑧	DX53D+AS80	镀铝锌
	⑦	CRCA sheet GB 08AL（SPCC）	镀锌
	⑥	40Cr	镀黄锌
	⑤	铝	/
	④	Q235	镀锌
	③	Q235	镀锌
	②	40Cr	镀锌
	①	DX53D+AS80	镀铝锌

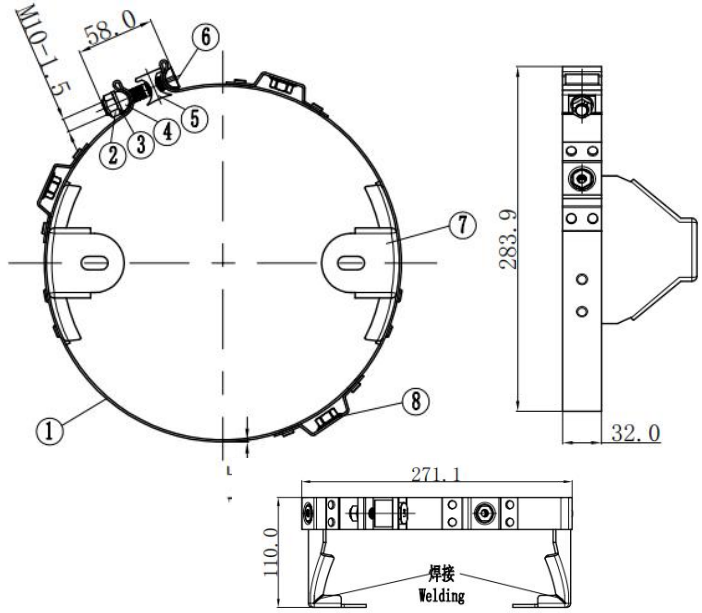



排气卡箍拓展品

图片	部件	材质	表面处理
	⑰	65Mn	Gray Coating
	⑯	EPDM	/
	⑮	40Cr	镀锌
	⑭	EPDM	/
	⑬	EPDM	/
	⑫	Q235	电泳黑
	⑪	铝和树脂	/
	⑩	304SS	抛光
	⑨	304SS	抛光
	⑧	300SS	/
	⑦	CRCA sheet GB 08AL (SPCC)	电泳灰
	⑥	CRCA sheet GB 08AL (SPCC)	镀锌镍合金
	⑤	40Cr	镀锌
	④	Q235	镀锌
	③	Q235	镀锌
	②	40Cr	镀锌
	①	CRCA sheet GB 08AL (SPCC)	镀锌镍合金

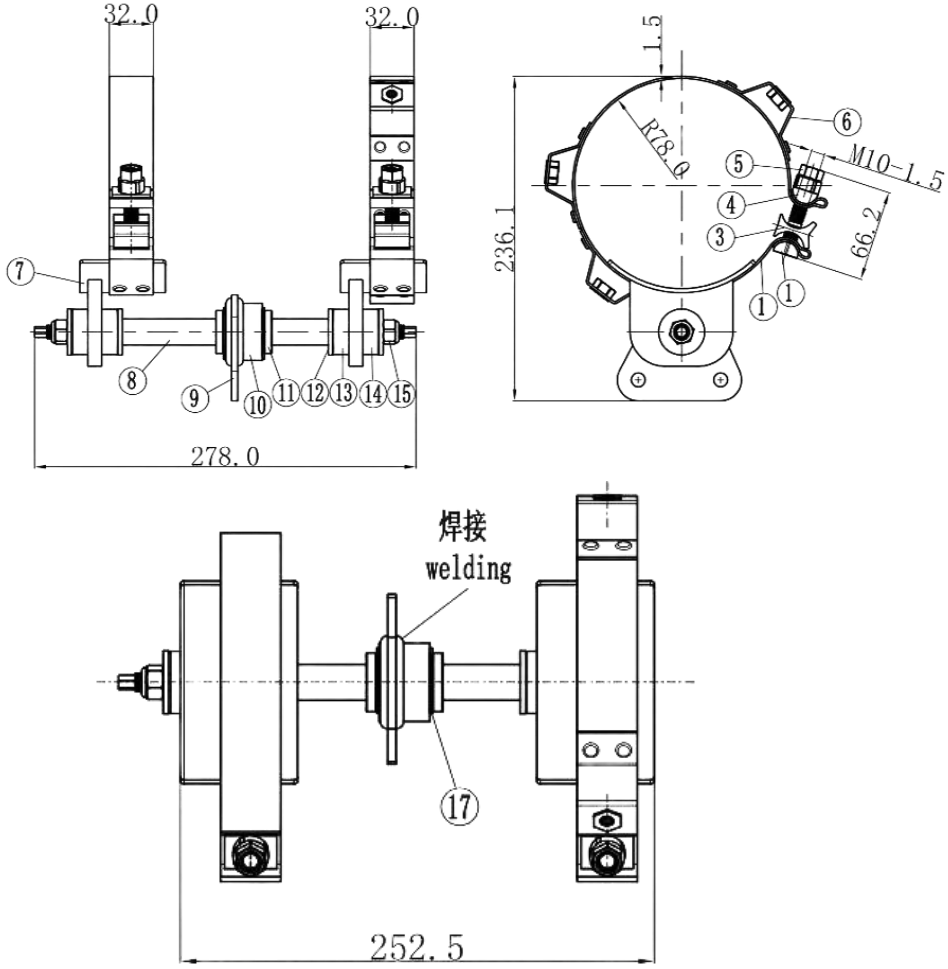



变径排气卡箍

图片	部件	材质	表面处理
	⑦	Q235	镀锌
	⑥	40Cr	达克罗
	⑤	铝	/
	④	Q235	镀锌
	③	40Cr	达克罗
	②	430SS	/
	①	DX53D+AS80	镀铝锌

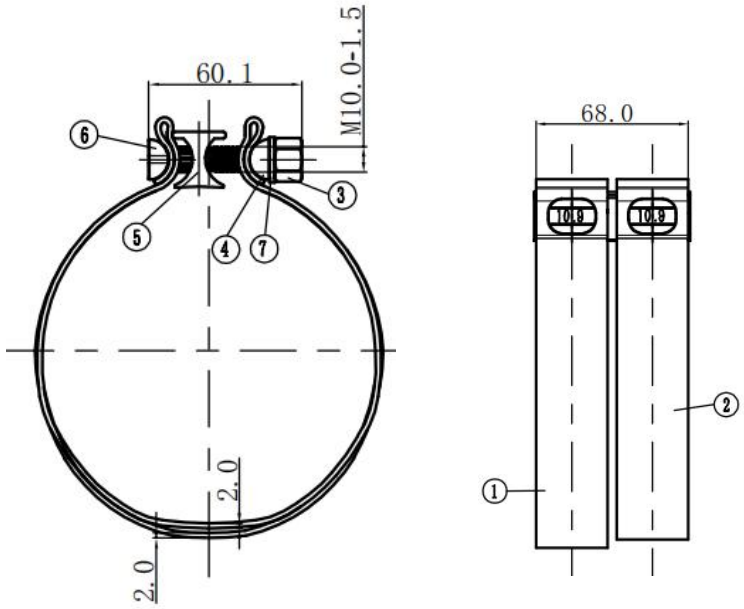


变径排气卡箍拓展品

图片	部件	材质	表面处理
	⑥	40Cr	镀锌
	⑤	40Cr	达克罗
	④	Q235	达克罗
	③	Q235	达克罗
	②	409SS	/
	①	409SS	/

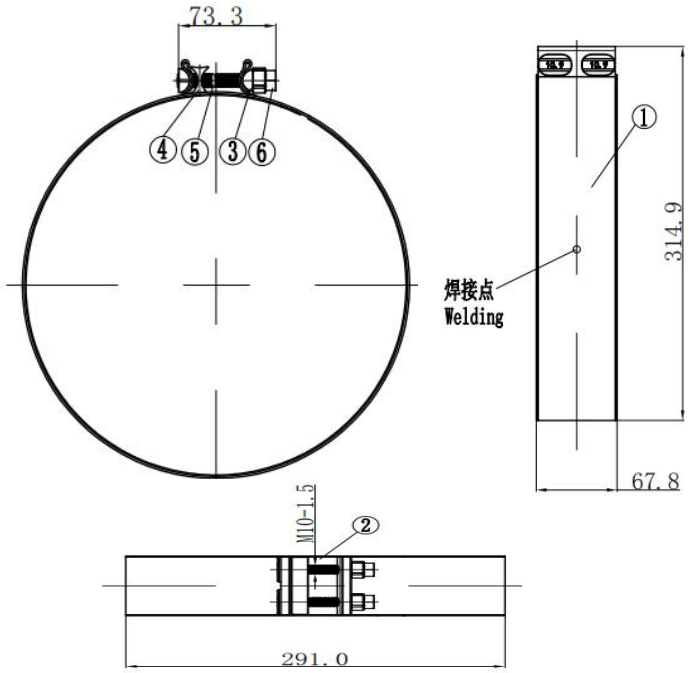


变径排气卡箍拓展品

图片	部件	材质	表面处理
	⑤	40Cr	达克罗
	④	40Cr	达克罗
	③	Q235	达克罗
	②	430SS	/
	①	430SS	/

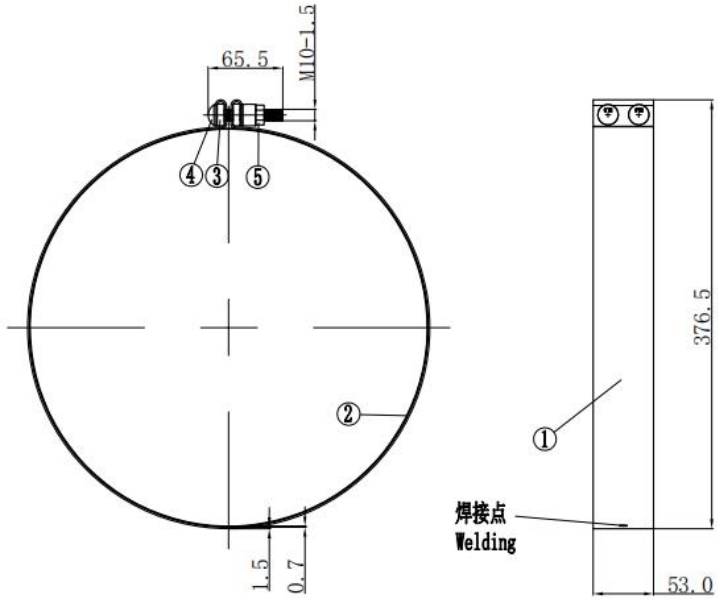


T型卡箍

图片	部件	材质	表面处理
	④	304SS	/
	③	304SS	/
	②	304SS	/
	①	304SS	/

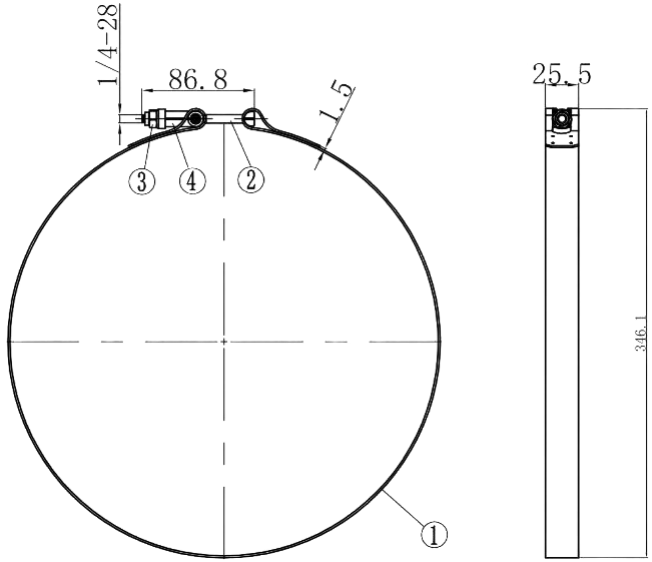


T型卡箍拓展品

图片	部件	材质	表面处理
	⑨	304SS	/
	⑧	40Cr	达克罗
	⑦	304SS	/
	⑥	430SS	/
	⑤	304SS	抛光
	④	304SS	/
	③	304SS	/
	②	40Cr	/
	①	304SS	/

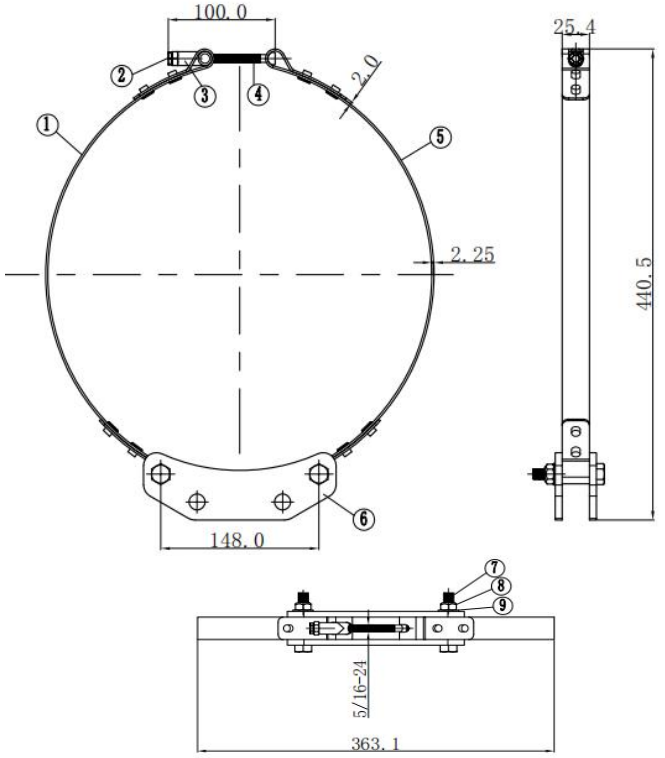


图片	部件	材质	表面处理
	⑤	40Cr	表面镀银
	④	304SS	/
	③	304SS	/
	②	304SS	/
	①	304SS	/

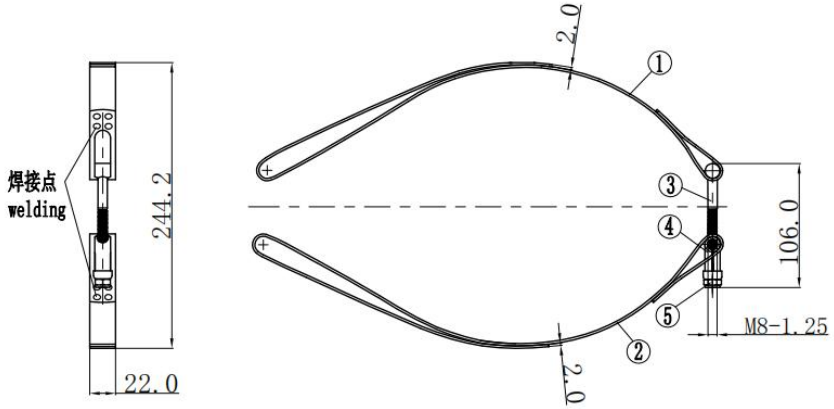


T型卡箍拓展品


图片	部件	材质	表面处理
	⑤	304SS	镀银
	④	304SS	/
	③	304SS	/
	②	304SS	/
	①	304SS	/

图片	部件	材质	表面处理
	⑤	304SS	/
	④	304SS	/
	③	304SS	镀黄锌
	②	304SS	/
	①	304SS	/

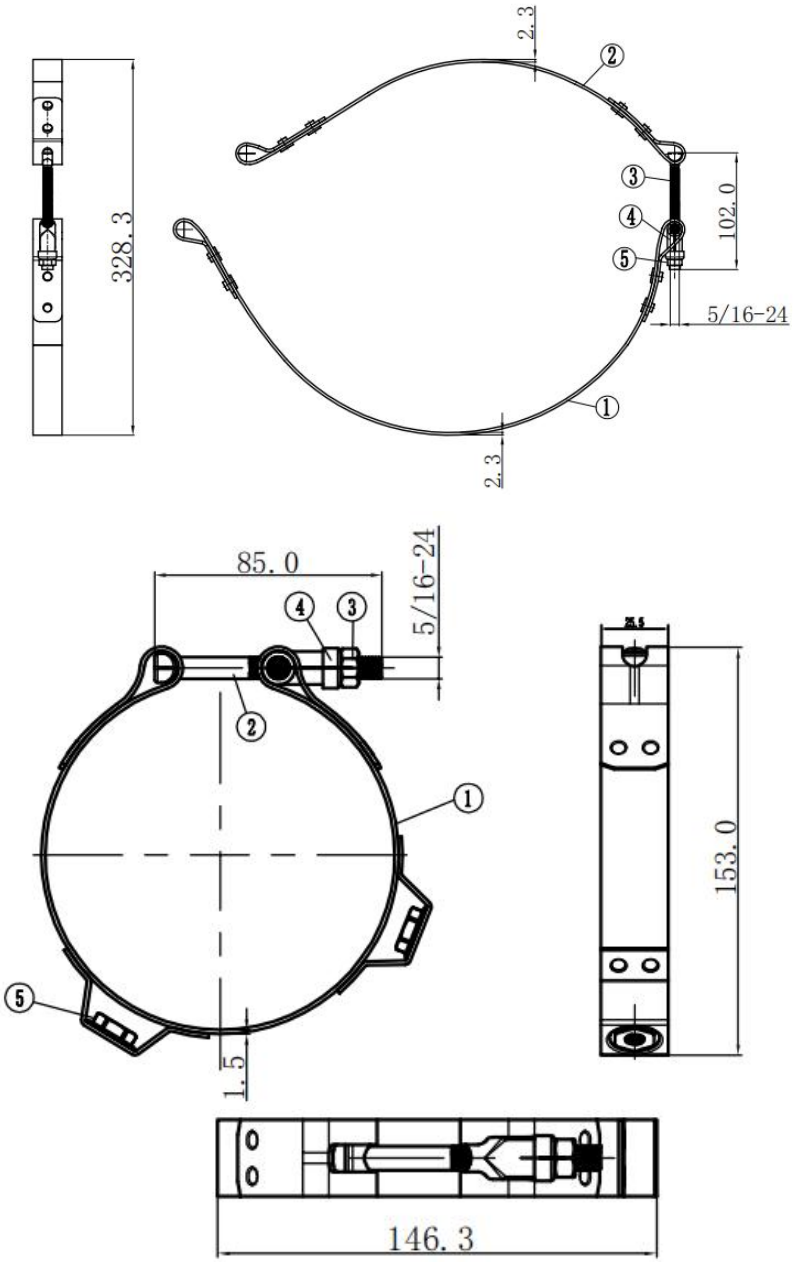


T型卡箍拓展品

图片	部件	材质	表面处理
	⑤	304SS	/
	④	40Cr	镀锌
	③	40Cr	达克罗
	②	Q235	达克罗
	①	304SS	/

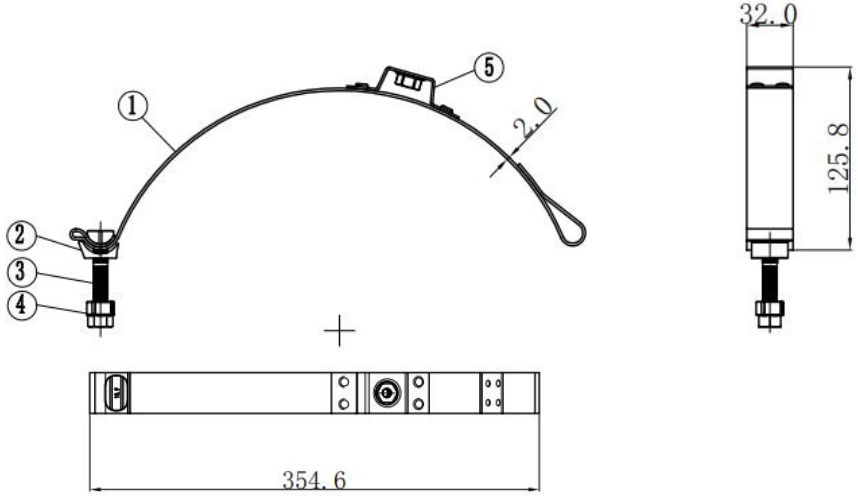



图片	部件	材质	表面处理
	③	304SS	/
	②	40Cr	镀蓝白锌
	①	304SS	/

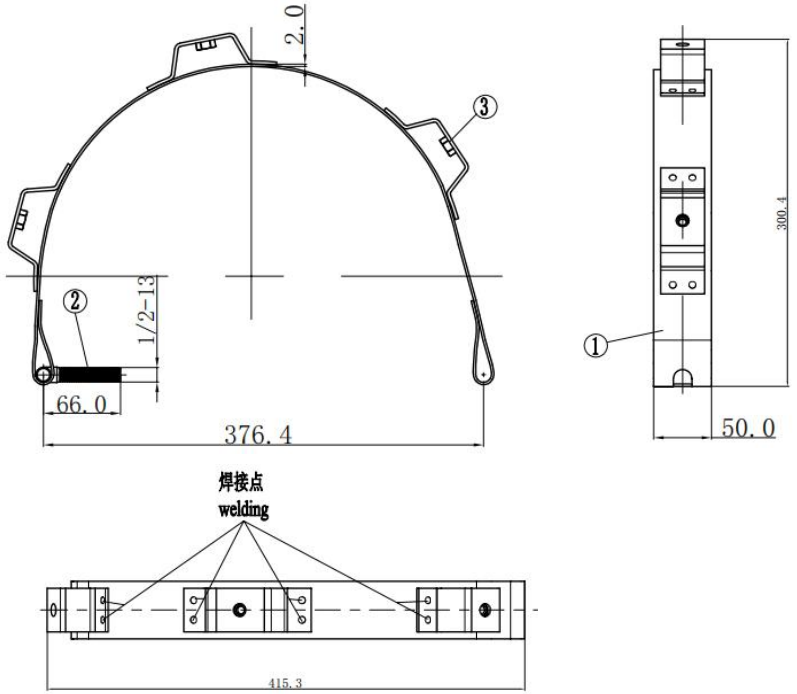



其他定制类卡箍


图片	部件	材质	表面处理
	⑤	40Cr	电泳黑
	④	CRCA sheet GB 09AL (SPCC)	电泳黑
	③	40Cr	电泳黑
	②	CRCA sheet GB 08AL (SPCC)	电泳黑
	①	CRCA sheet GB 08AL (SPCC)	电泳黑

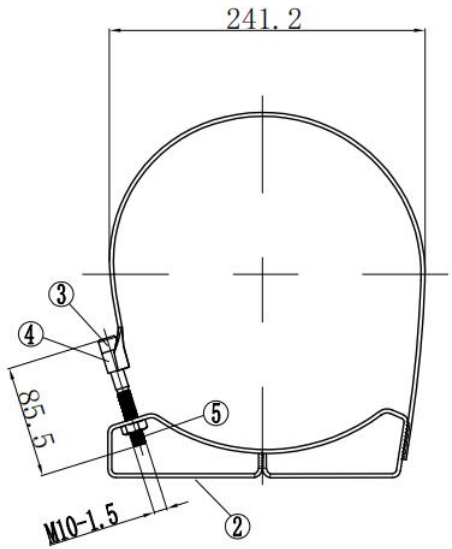

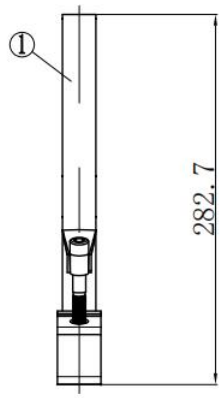

图片	部件	材质	表面处理
	②	304SS	/
	①	304SS	/

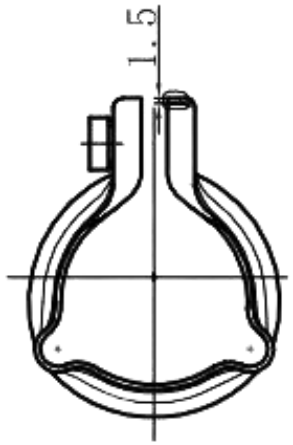

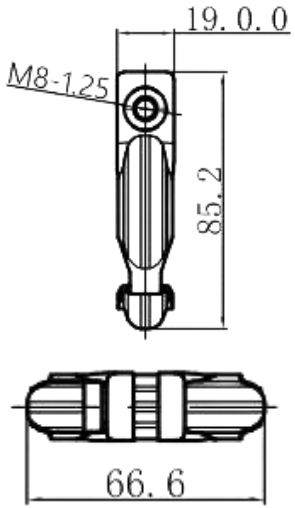


其他定制类卡箍


图片	部件	材质	表面处理
	①	304SS	/


图片	部件	材质	表面处理
	①	DX53D+AS80	镀铝锌


图片	部件	材质	表面处理
	②	40Cr	镀锌
	①	Q235B	镀锌

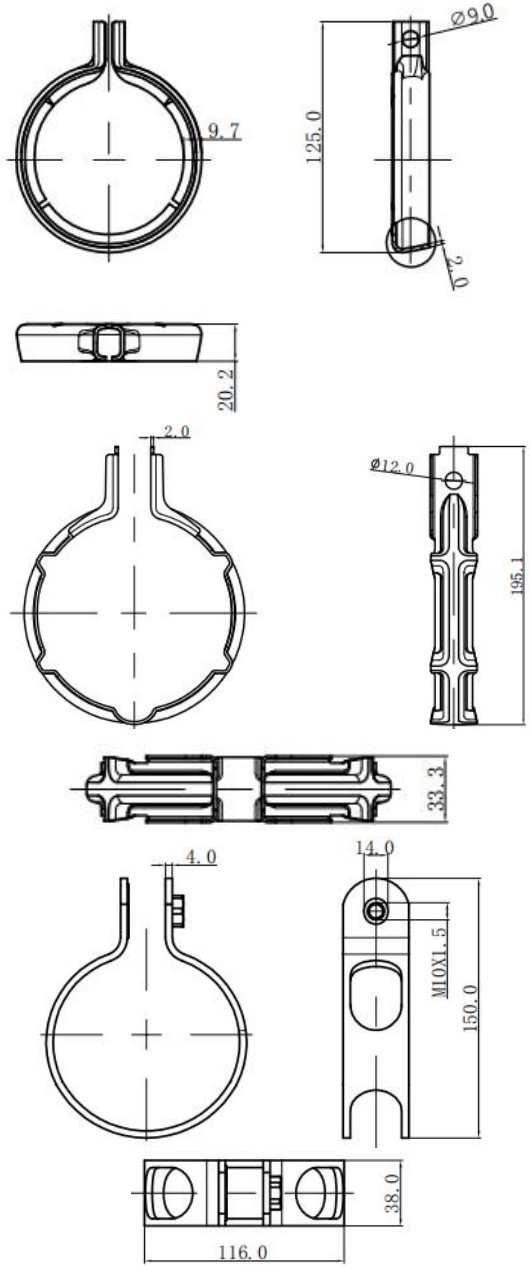


其他定制类卡箍

图片	部件	材质	表面处理
	⑤	40Cr	镀锌镍合金
	④	Q235B	镀黄锌
	③	40Cr	镀黄锌
	②	Q235B	镀黄锌
	①	Q235B	镀黄锌

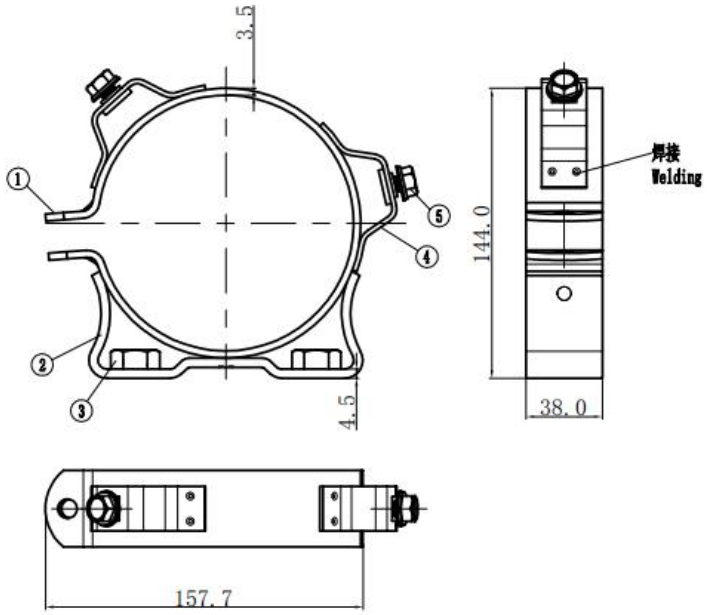


图片	部件	材质	表面处理
	③	40Cr	镀锌
	②	Q235B	镀锌
	①	Q235B	镀锌

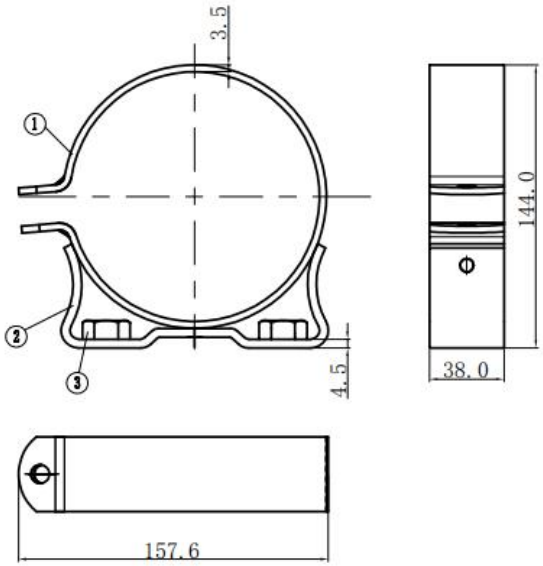

其他定制类卡箍


图片	部件	材质	表面处理
	④	304SS	/
	③	304SS	/
	②	304SS	/
	①	304SS	/

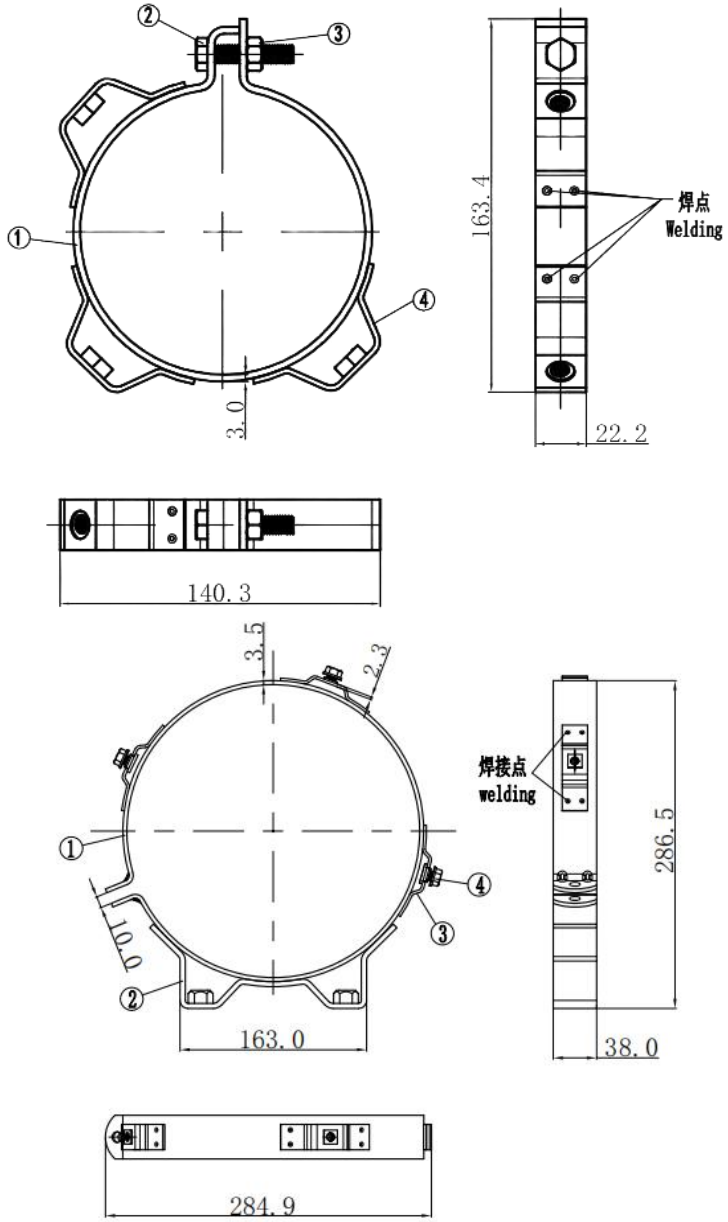


图片	部件	材质	表面处理
	④	40Cr	镀锌镍合金
	③	Q235B	镀锌
	②	Q235B	镀锌
	①	Q235B	镀锌

其他定制类卡箍

图片	部件	材质	表面处理
	③	40Cr	镀锌镍合金
	②	Q235B	镀黄锌
	①	Q235B	镀黄锌

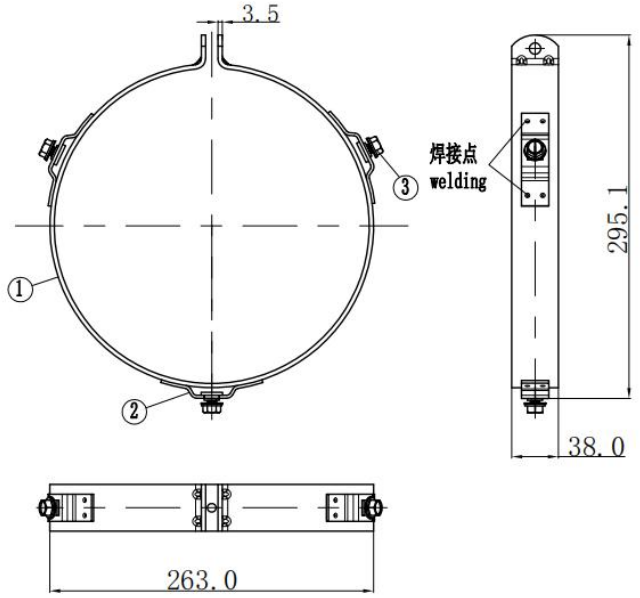



图片	部件	材质	表面处理
	④	304SS	/
	③	CRCA sheet GB 08AL (SPCC)	电泳黑
	②	CRCA sheet GB 08AL (SPCC)	电泳黑
	①	304SS	/

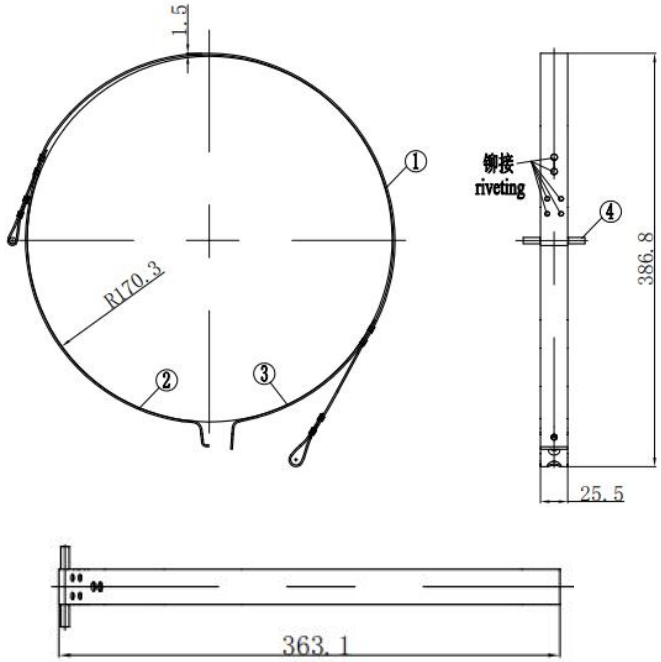



其他定制类卡箍


图片	部件	材质	表面处理
	⑤	Q235B	达克罗
	④	40Cr	达克罗
	③	Q235	镀锌
	②	40Cr	镀锌
	①	Q235B	达克罗

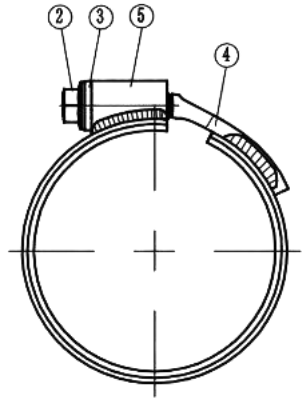


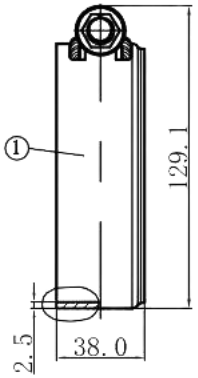




图片	部件	材质	表面处理
	④	40Cr	镀锌
	③	塑料	白色
	②	304SS	/
	①	Q235	黑色喷涂

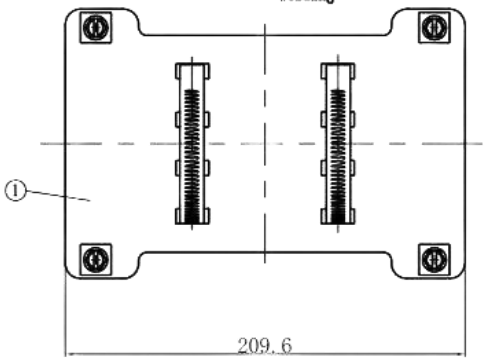




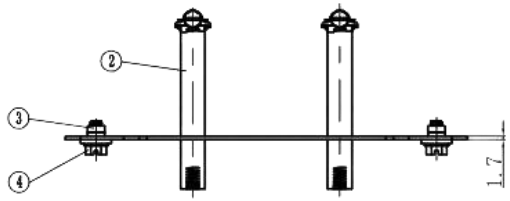


其他定制类卡箍

图片	部件	材质	表面处理
	④	LOW CARBON STEEL SAE 1040	电泳黑
	③	LOW CARBON STEEL SAE 1040	电泳黑
	②	CRCA sheet A1008	电泳黑
	①	CRCA sheet A1008	电泳黑

图片	部件	材质	表面处理
	①	Q235B	镀蓝白锌


图片	部件	材质	表面处理
	②	40Cr	电泳黑
	①	Q235	电泳黑

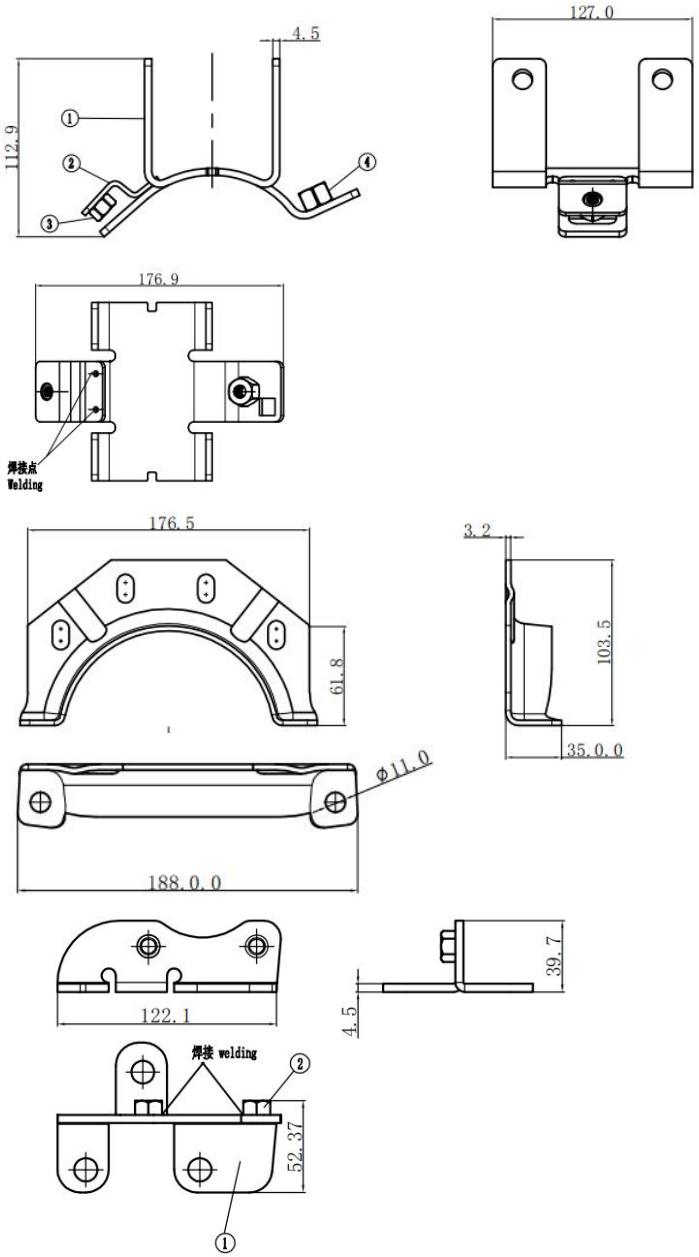

我们的团队




TIANJIN YUDA COMMERCIAL AND TRADING CO.

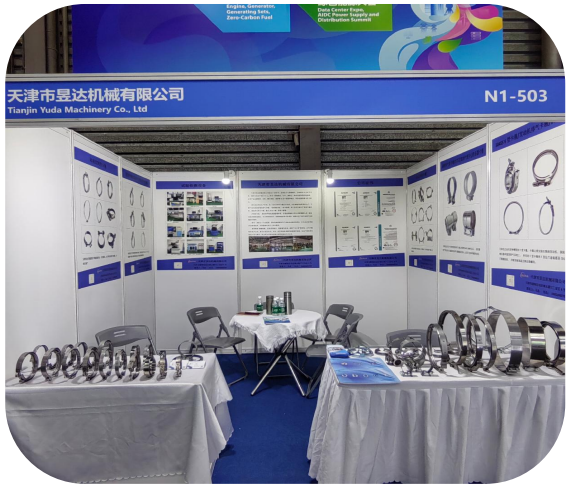
天津市昱达机械有限公司
Tianjin Yuda Machinery Co., Ltd
N1-503


Shanghai Automechanika in 2025


NARAN


TIANJIN YUDA COMMERCIAL AND TRADING CO.,LTD
E4.20b

天津市昱达机械有限公司
TIANJIN YUDA MACHINERY CO.,LTD

地址：天津市静海区沿庄镇元蒙口工业园区
电话：15022245773
网站：www.yudahoseclamp.com
邮箱：jack@yuda-clamp.com