


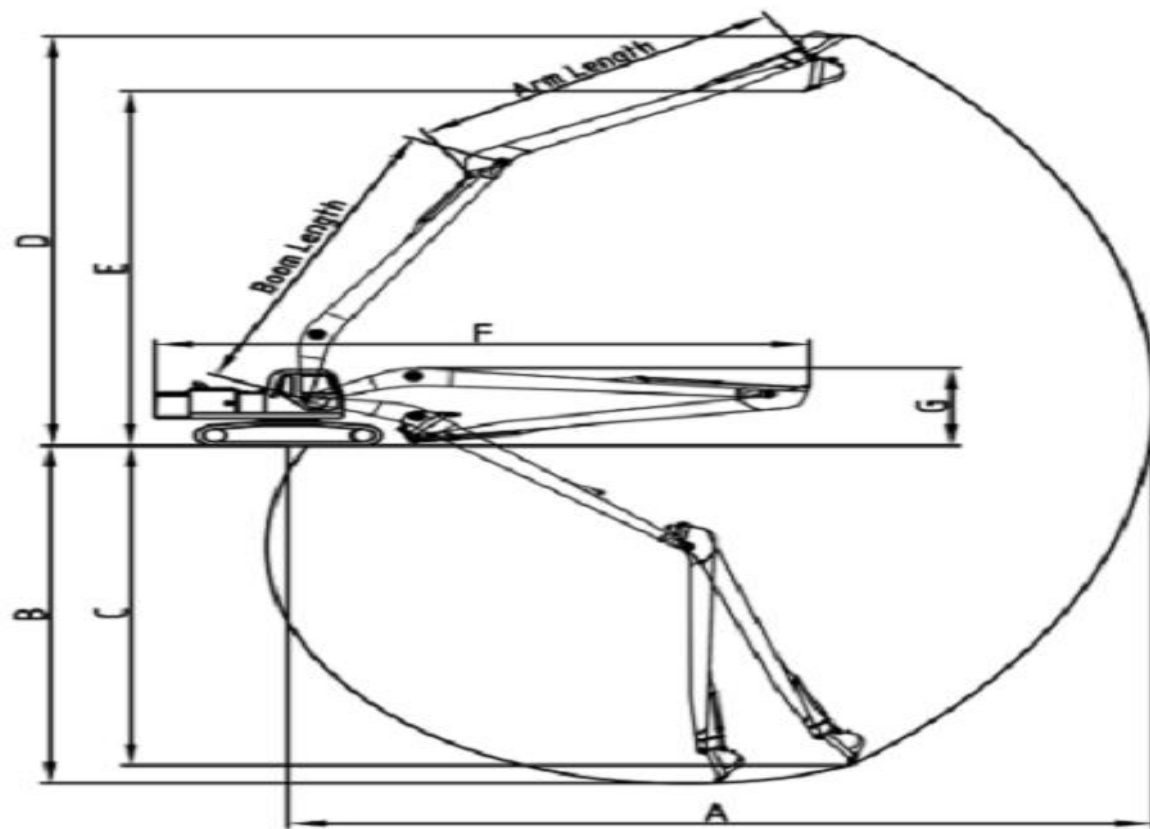

Excavator Tonnage	12-20	20-25		30-36		30-36	40-47			45-55	>50
Total Boom Arm Length (m/")	13/42.7"	15.4/50.5"	18/59.1"	18/59.1"	20/65.6"	22/72.2"	20/65.6"	22/72.2"	24/78.7"	26/85.3"	28/91.9"
Bucket Capacity (M3)	0.3	0.5	0.4	0.9	0.7	0.5	1	0.8	0.6	0.4	0.4
Max. Digging Radius (m/") (A)	12.5/41"	15/49.2"	17.3/56.8"	17.3/56.8"	19.2/63"	21.02/69"	19.2/63"	21.02/69"	23.02/75.5"	25/82"	26.8/87.9' ,
Max. digging depth (m/") (B)	8.6/28.2"	10.3/33.8"	12.1/39.7"	12.1/39.7"	14/45.9"	15.41/50.6"	14/45.9"	15.41/50.6"	16.41/53.8"	17.5/57.4' ,	19.1/62.7' ,
Max. vertically digging depth (m/") (C)	8.1/26.6"	9.4/30.8"	11.2/36.7"	11.2/36.7"	13.1/43"	15.52/50.9"	13.1/43"	14.52/47.6"	15.52/50.9"	16.7/54.8' ,	18.4/60.4' ,
Max cutting Height	11.3/37.1"	12.8/42"	15.3/50.2"	15.3/50.2"	16.6/54.5"	17.17/56.3"	15.6/51.2"	16.17/53.1"	17.17/56.3"	20.3/66.6' ,	21.3/69.9' ,

Max. unloading height (m/")(E)	9.8/321.5"	10.2/33.5"	12.2/40"	12.2/40"	13.5/44.3"	14.83/48.7"	13.7/44.9"	14.92/49"	15.63/51.3"	17/55.8"	18.2/59.7"
Min. Rotary radius	4/13.1"	4.72/15.5"	5.1/16.7"	5.1/16.7"	13.5/44.3"	6.2/20.3"	6.2/20.3"	7.74/25.4"	7.74/25.4"	8.3/27.2"	9.5/31.2"
Boom Length (m/")	7.1/23.3"	8.6/28.2"	9.9/32.5"	9.9/32.5"	11/36.1"	12/39.4"	11/36.1"	12/39.4"	13/42.7"	14/45.9"	15/49.2"
Arm Length (m/")	5.9/19.4"	6.8/22.3"	8.1/26.6"	8.1/26.6"	9/29.5"	10/32.8"	9/29.5"	10/32.8"	11/36.1"	12/39.4"	13/42.7"
Stick Max. cutting force(KN)	82	82	64	115	94	78	167	138	109	109	109
Bucket Max. cutting force (KN)	151	151	99	151	151	151	151	151	151	151	151
Folding Length (mm) (F)	10/32.8"	12.6/41.3"	14.3/46.9"	14.3/46.9"	15.3/50.2"	1.696/5.6"	15.3/50.2"	16.96/55.6"	17.96/58.9"	19.4/63.6"	20/65.6"
Folding Height (m/")(G)	3/9.8"	3.34/11"	3.48/11.4"	3.545/11.6"	3.57/11.7"	3.67/12"	3.67/12"	3.67/12"	3.67/12"	3.8/12.5"	3.8/12.5"
Counterweight (ton)	0	0	1.5	0	3	3.5	2	3	3.5	4	5