安 强 铸 轮
Anqiang Cast Wheels

为工矿而生 为耐用而铸造
Born for industry and mining Cast for durability

聚力打造全球·安强工矿铸轮领军品牌
Join forcgs to build a global leading brand for Angiang industrial and mining cast wheels

地址：河南省安阳市汤阴宜沟工业园区
电话：0372-6372567
邮箱：aysdy@126.com
网址：http://www.aysdycy.com

安强车轮
AN QIANG CHE LUN

中国铸造车轮引领者

安阳市安强车轮有限公司
ANYANG ANQIANG WHEEL CO.,LTD.



安强铸轮 承千钧重任
中国矿卡 拓万里山河



公司简介 Company Profile

Established in 2015 and located in the Yigou Industrial Park, Tangyin County, Anyang City, Henan Province, Anyang Anqiang Wheel Co., Ltd. is a national-level high-tech enterprise specializing in the R&D, production, and sales of off-road specialty wheels, engineering vehicle wheels, mining truck wheels, and custom-made wheels. The company occupies an area of 70,000 square meters, currently employs 200 staff members—including more than 30 engineering and technical personnel—and has an annual output value of 300 million yuan. The company holds 4 invention patents and hundreds of utility model patents. Its product range includes seamless, one-piece alloy cast wheels, construction machinery wheels, structural steel commercial vehicle wheels, forklift wheels, and various cast chassis components. It can customize special-shaped, non-standard wheels and cast chassis components according to customer requirements. The company maintains long-term partnerships with many well-known domestic construction machinery enterprises, and its products are exported to more than 150 countries and regions worldwide.

安阳市安强车轮有限公司成立于2015年，坐落于河南省安阳市汤阴县宜沟工业园区是一家专注于非道路特种车轮、工程车辆、矿卡及非标定制车轮研发、生产与销售的国家级高新技术企业。公司占地7万平方米，现有职工200人，工程技术人员30余人，年总产值3亿元。拥有4项发明专利、数百项实用新型专利。产品覆盖合金铸造一体无焊缝车轮、工程机械车轮、型钢商用车车轮、叉车车轮及各类铸造底盘配件，可按照客户需求定制异形非标车轮与铸造底盘配件。公司与国内多家知名工程机械企业长期合作，产品远销全球150多个国家和地区。


















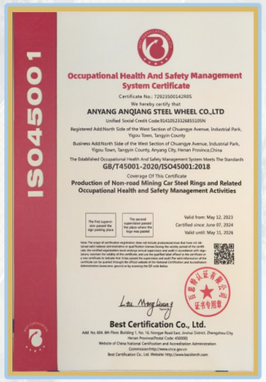

专利证书





























Anqiang Wheels is setting new standards for cast wheels in China. With a deep focus on wheels for mining and heavy-duty construction applications, the company has overcome the challenges of traditional welded steel rims through its one-piece casting process. Dedicated to the R&D and smart manufacturing of high-strength cast wheels, Anqiang Wheels delivers products that withstand heavy loads, resist cracking, and prevent deformation, providing reliable wheel solutions for mines, wide-body vehicles, and construction machinery, and establishing the solid technical prowess of domestically produced heavy-duty wheels.

安强车轮，正在开创中国铸造车轮新高度。深耕矿用、工程重载车轮领域，以一体铸造工艺打破传统焊接钢圈痛点，专注高强度铸造车轮研发智造，抗重载、抗开裂、抗变形，为矿山、宽体车、工程机械提供可靠车轮解决方案，铸就国产重载车轮硬实力。



产品目录

01 合金铸造车车轮 5

02 型钢工程车车轮 6

03 非标定制异型车轮 7

04 叉车车轮 15

05 农林机械车轮 16

06 车轮配套轮毂产品 18

合金铸造车车轮 Gold casting car wheels

专用拉沙、石、矿合金铸造一体化无焊缝载重车钢圈产品一览表
Casting integrated seamless load-bearing truck steel rims


序号 NO.	车轮型号 Wheel Type	推荐配用轮胎 Tyre Model	轮辐厚度(㎜) Disc Thickness	螺栓孔直径(㎜) Bolt Hole Diameter	中心孔直径(㎜) C.B.D	分布圆直径(㎜) P.C.D	配用车型 Tyre Model	备注 Remarks
1	29-13.00/2.5	18.00-29	25	24-⌀27	446	500	宽体矿用车	三件式
2	25-11.25/2.0	16.00-25	23	18-⌀26 12-⌀26	371	425	非公路矿用车 工程自卸车重汽	三件式
3	25-10.00/2.0	14.00-25	23	12-⌀26	371	425	非公路矿用车 工程自卸车重汽	三件式
4	10.0-20	14.00-20	15	10-⌀24	282	335	防爆车轮	三件式
5	8.8-20	12.00-20	22	10-⌀26	281	335	非公路矿用车 工程自卸车重汽	两件式



25-11.25/2.0



29-13.00/2.5

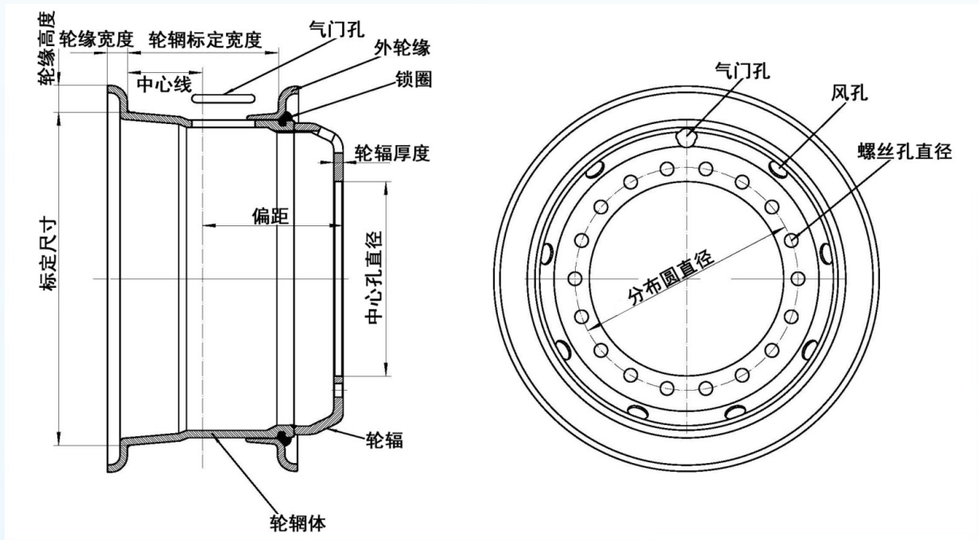

型钢工程车车轮 Steel engineering vehicle wheels

型钢钢圈参数表

车轮规格 Specifications	轮辐厚度 Disc Thickness	螺栓孔 Bolt Hole 孔数 Holes	螺栓孔 直径 Diameter	螺栓孔 分布圆 P.C.D	中心孔直径 C.B.D	偏距 Offset	适用轮胎 Tyre Model	适用车型 Vehicle Model
5.50F-16	12 14	6	20.5	190	140	108	6.50-16 7.00-16	BJ 130
	12 14	6	32.5	222.25	164	135		江淮
	12 14	6	32.5	222.25	163	127		东风小卡
	12 14	6	32.5		164	127		江淮
	12 14	6	20.5	190	140	108		CA 1046
	12 14	6	22	190	163	127		跃进1043
6.00G-16	12 14	6	20.5	190	140	108	7.50-16 8.25-16	BJ 130
	12 14	6	32.5	222.25	164	127		江淮
	12 14	6	32.5	222.25	163	127		东风小卡
	12 14	6	32.5		164	135		江淮
	12 14	6	20.5	190	140	108		CA 1046
	12 14	6	22	190	163	127		跃进1043
6.50-15	10 12	10	27 32	225	176	125 135	8.25-15	低平板车
6.50-16	12 14	6	32.5	222.25	163	127	8.25-16	东风小卡
	12 14	6	32.5	224	164	135		江淮
	12 14	5	32.5	235	164	135		江淮
	12 14	8	24	211	161.5	135		东风八孔
	14	6	24.5	211	164	135		奥铃捷运
	14	8	25	211	163	135		跃进1063
6.50-20	14 16	8	32	275	214	145	9.00-20	CA 141
	14 16	8	26	275	224	145		欧曼
	14 16	8	26	275	214	145	8.25-20	欧曼
7.00T-20	14 16	8	32	275	214	153	9.00-20	EQ 151
	14 16	8	26	275	214	153		欧曼
7.50V-20	14 16	8	32	275	214	168	10.00-20	EQ 151
	14 16	10	32	285.75	222	168		CA 153
	14 16	10	26	285.75	220	168		五吨王
	14 16	10	26	335	281	168		斯太尔
	14 16	8	32	285	221	168		五十铃
8.00V-20	16 18	10	32	285.75	222	172	11.00-20	CA 153
	16 18	10	26	285.75	220	172		五吨王
	16 18	10	26	335	281	176		斯太尔
8.50-20	16 18	10	26	370	320	180	12.00-20	北奔坑口自卸车
	18 20	10	26	335	281	176		斯太尔
8.80-20	18 20	10	26	335	281	190	12.00-20	斯太尔
9.00-20	18 20	10	26	335	281	193	12.00-20	斯太尔
10.00-20	18 20	10	26	335	281	204	14.00-20	斯太尔
8.50-24	16 18	10	26	335	281	180	12.00-24	专用车
	16 18	12	26.5	425	371	180	12.00-24	专用车

也可来图定制

非标定制异型车轮 Non-standard customized special-shaped wheels


安强车轮 AN QIANG CHE LUN

两件式型钢非标定制车轮产品参数（有内胎、实心胎车轮均可定制）

2-Piece steel non-standard customized wheel product parameters (inner tube/solid tire wheels can be customized)

序号 NO.	车轮规格 Wheel Type	推荐配用轮胎 Tyre Model	螺栓孔直径（mm） Bolt Hole Diameter	中心孔直径（mm） C.B.D	分布圆直径（mm） P.C.D	偏距（mm） Offset
1	6.5-16	8.25-16	自定	自定	自定	自定
2	6.5-20	9.00-20 8.25-20	自定	自定	自定	自定
3	7.0-15	9.00-15	自定	自定	自定	自定
4	7.0-20	9.00-20	自定	自定	自定	自定
5	7.5-15	10.00-15	自定	自定	自定	自定
6	7.5-20	10.00-20	12-∅22	353	406	127
7	8.0-16	11.00-16	自定	自定	自定	自定
8	8.0-20	11.00-20	自定	自定	自定	自定
9	8.5-20	12.00-20	自定	自定	自定	自定
10	10.0-20	14.00-20	自定	自定	自定	自定
11	8.5-24	12.00-24	10-∅22	420	616	108
12	10.0-24	14.00-24	自定	自定	自定	自定




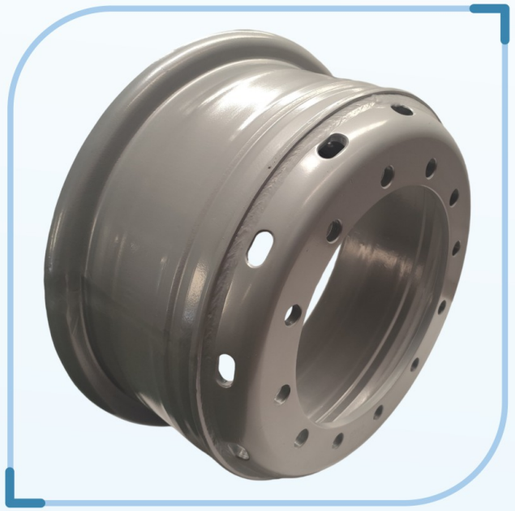

三件式非标定制车轮产品参数（有内胎、无内胎、实心胎车轮均可定制）

Three piece non-standard customized wheel product parameters (inner tube, tubeless, solid tire wheels can be customized)

序号 NO.	车轮规格 Wheel Type	推荐配用轮胎 Tyre Model	螺栓孔直径(mm) Bolt Hole Diameter	中心孔直径(mm) C.B.D	分布圆直径(mm) P.C.D	偏距(mm) Offset
1	15-9.75/1.7	355/65-15	8-∅24	175.8	225	15
2	18-9.75/1.5	355/65-18	10-∅26.5	380	335	212
3	20-7.5/1.7	10.00-20	10-∅22	352	406	0
4	20-8.0/1.7	11.00-20	10-∅26.5	281	335	自定
5	20-8.5/1.7	12.00-20 13.00-20	10-∅26.5	281	335	188
6	20-10.00/1.7	14.00-20	10-∅26.5	281	335	202
7	20-10.00/2.0	14.00-20	10-∅26.5	281	335	自定
8	20-11.00/1.7	15.00-20	10-∅24	352	400	自定
9	20-13.00/2.0	18.00-20	10-∅22	374	414	自定
10	20-14.00/2.0	17.50-20	10-∅26.5	281	335	自定
11	20-22.00/2.0	26.50-20	自定	自定	自定	自定
12	21-18.00/1.5	24.00-21	自定	自定	自定	自定

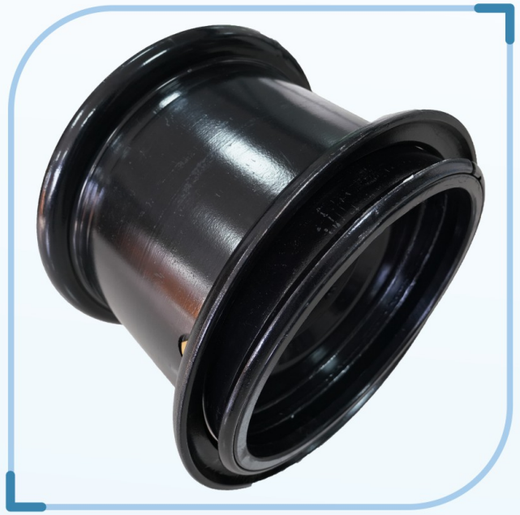



非标定制异型车轮


Non-standard customized special-shaped wheels


三件式矿用宽体车车轮产品参数（有内胎、无内胎、实心胎车轮均可定制）

Three piece mining wide body vehicle wheel product parameters (with inner tube, tubeless, solid tire wheels can be customized)

序号 NO.	车轮规格 Wheel Type	推荐配用轮胎 Tyre Model	螺栓孔直径(mm) Bolt Hole Diameter	中心孔直径(mm) C.B.D	分布圆直径(mm) P.C.D	偏距(mm) Offset
1	22-11.00	415/80R22	10-∅26	287	335	自定
2	24-8.5/1.7	12.00-24 13.00-24	12-∅26.5	371	425	188
3	24-10.00/1.7	14.00-24	12-∅26.5	371	425	204
4	25-8.5/1.5	13.00-25	12-∅26.5	371	425	186
5	25-14.00/1.5	17.50-25	自定	自定	自定	自定
6	25-10.00/2.0	14.00-25	12-∅26.5	371	425	204
7	25-11.25/2.0	16.00-25	12-∅26.5	371	425	226
8	25-13.00/2.0	18.00-25	12-∅26.5	371	425	242
9	25-22.00/2.5	26.50-25	12-∅26.5	371	425	自定
10	29-13.00/2.5	18.00-29	18-∅27	445.8	500	294


注:1、轮辋和轮辐厚度可根据客户需求定制。 2、偏距也可以根据客户需求定制

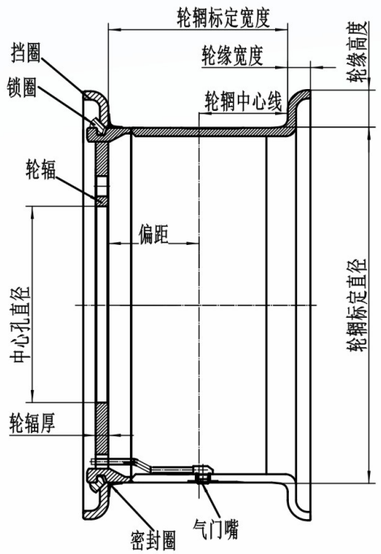

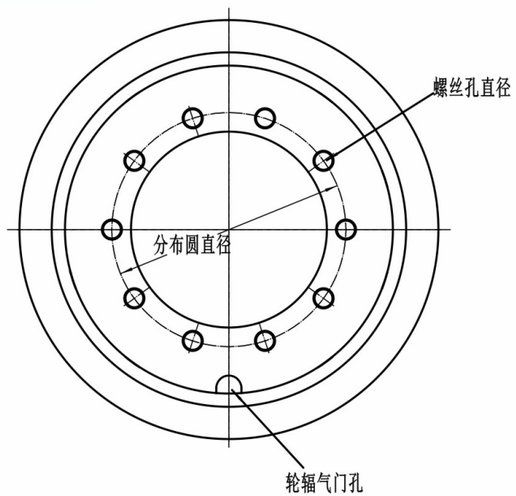


三件式无内胎车轮


3-piece tubeless rim

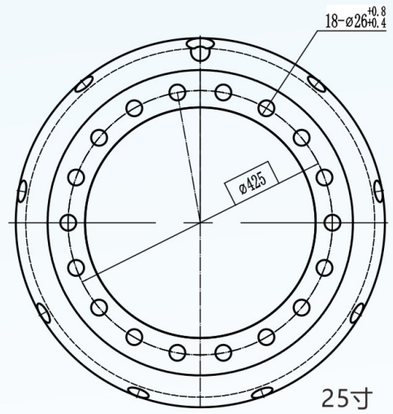

矿用车轮轮辐图

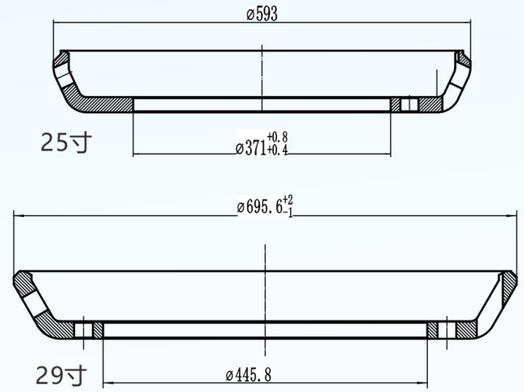

矿用车轮轮辐图

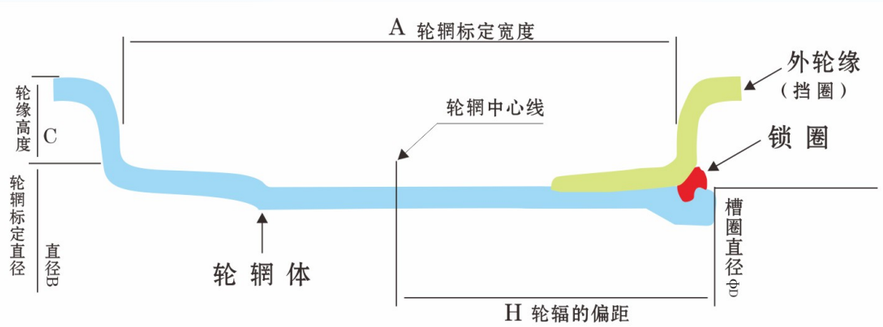

矿用宽体车轮轮辋截面图



矿用宽体车钢圈




型钢一体化真空钢圈

非标定制异型车轮
Non-standard customized special-shaped wheels

安强车轮 AN QIANG CHE LUN

五件式无内胎车轮
5-piece tubeless rim

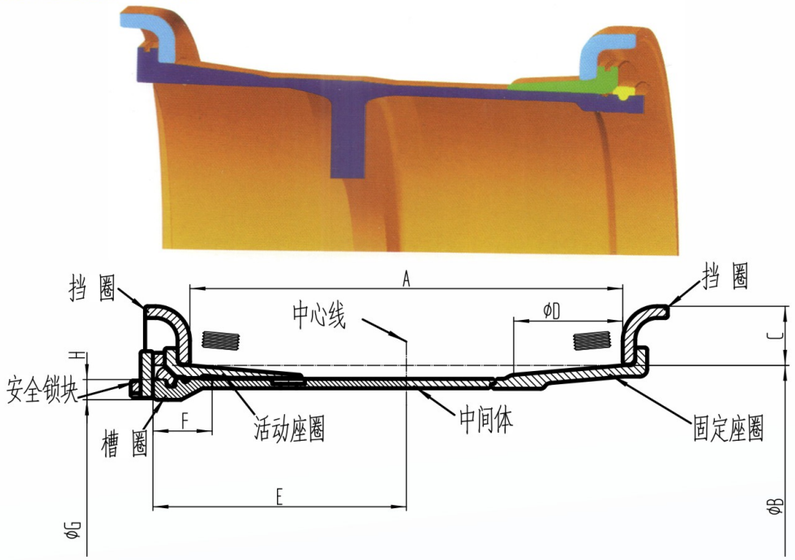

三件式无内胎车轮参数
3-piece tubeless rim

轮辋规格 Rim Size	推荐配用轮胎 Standard Tyre	主要尺寸 Component Size(mm)								重量 Weight (kg)	配件代码 Accessories Code		
		A	B	C	D	E	F	G	H		轮辋体 Rim Body	挡圈 Side Ring	锁圈 Lock Ring
20–10.00/1.7	14.00–20	254.0	514.4	43.0	473.0	140.0	51.6	476.4	18.2	54.4	AQ2010001702T	AQ1720T	AQ20T
21–10.00/1.7	14.00–21	254.0	533.4	43.0	492.0	140.0	51.6	495.4	18.2	57.3	AQ2110001703T	AQ1721T	AQ21T
21–18.00/1.5	24.00–21	475.0	533.4	38.1	492.0	250.8	51.6	495.4	18.2	78.0	AQ2008001503T	AQ1521T	AQ21T
21–18.00/1.7	12.00–25	215.9	614.4	43.0	574.0	140.2	51.6	551.0	18.2	66.3	AQ2408501703T	AQ1724T	AQ21T
24–10.00/1.7	14.00–24	254.0	614.4	43.0	574.0	140.2	51.6	551.0	18.2	66.3	AQ2410001703T	AQ1724T	AQ24T
25–10.00/1.5	14.00–25	254.0	635.0	38.1	593.6	140.2	51.6	597.0	18.2	68.5	AQ2510001503T	AQ1525T	AQ25T
25–14.00/1.5	17.50–25	381.0	635.0	38.1	593.6	203.7	51.6	597.0	18.2	82.0	AQ2514001503T	AQ1525T	AQ25T
25–17.00/1.7	20.50–25	430.0	635.0	43.0	568.2	228.2	51.6	597.0	18.2	87.0	AQ2717001703T	AQ1725T	AQ25T
25–30.00/1.5	67X34.00–25	762.0	635.0	38.1	593.6	294.2	51.6	597.0	18.2	128.0	AQ2530001503T	AQ1525T	AQ25T
25–36.00/1.5	66X44.00–25	914.4	635.0	38.1	593.6	470.4	51.6	597.0	18.2	143.0	AQ2536001503T	AQ1525T	AQ25T
20–7.5/1.7	10.00–20	190.5	514.4	43	469	122	72.3	443	22.2	46	AQ2007501703QS	AQ1720QS	AQ20QS
20–10.5/1.7	14.00–20	254	514.4	43	469	143	72.3	443	22.2	58	AQ202010001703QS	AQ1720QS	AQ20QS
20–11.25/2.0	16.00–20	286	514.4	51	469	170	72.3	443	22.2	67	AQ2011252003QS	AQ2020QS	AQ20QS
25–17.00/2.0	20.50–25	430.0	635.0	51.0	574.6	273.4	82.7	597.0	26.2	165	AQ2517002003EM	AQ2025EM	AQ25QS
25–19.50/2.5	23.50–25	595.0	635.0	51.0	574.6	273.4	82.7	597.0	26.2	186	AQ2519502503EM	AQ2525EM	AQ25EM
25–22.00/3.0	26.50–25	559.0	635.0	76.2	574.6	305.4	82.7	597.0	26.2	215	AQ2522003003EM	AQ3028EM	AQ25EM
25–24.00/3.0	30/65–25	609.6	635.0	76.2	574.6	330.7	82.7	597.0	26.2	225	AQ2524003003EM	AQ3025EM	AQ25EM
25–25.00/3.5	29.50–25	635.0	635.0	88.9	574.6	343.4	82.7	597.0	26.2	257	AQ2525003503EM	AQ3525EM	AQ25EM

五件式无内胎车轮参数
5-piece tubeless rim

轮辋规格 Rim Size	推荐配用轮胎 Standard Tyre	主要尺寸 Component Size(mm)								重量 Weight (kg)	配件代码 Accessories Code			
		A	B	C	D	E	F	G	H		轮辋体 Rim Body	挡圈 Side Ring	活动座圈 Boad Seat	锁圈 Lock Ring
25×10.00/1.5	14.00-25	254	635	38.1	574.6	1733	82.7	546	27	125	AQ2510001505EM	AQ1525EM	AQ25EMS01	AQ25EM
25×11.25/2.0	16.00-25	285.8	635	50.8	574.6	185.7	82.7	546	27	136	AQ2511252005EM	AQ2025EM	AQ25EMS01	AQ25EM
25×13.00/2.5	18.00-25	330.2	635	63.5	574.6	211.4	82.7	546	27	166	AQ2513002505EM	AQ2525EM	AQ25EMS01	AQ25EM
25×14.00/1.5	17.5-25	356	635	38.1	574.6	224.1	82.7	546	27	153	AQ2514001505EM	AQ2155EM	AQ25EMS01	AQ25EM
25×15.00/3.0	21.00-25	381	635	76.2	574.6	236.5	82.7	546	27	188	AQ2515003005EM	AQ3025EM	AQ25EMS01	AQ25EM
25×17.00/2.0	20.5-25	431.8	635	50.8	574.6	262	82.7	546	27	167	AQ2517002005EM	AQ2025EN	AQ25EMS01	AQ25EM
25×19.50/2.5	23.5-25	495.3	635	63.5	574.6	293	82.7	546	27	195	AQ2519502505EM	AQ2025EM	AQ25EMS01	AQ25EM
33×13.00/2.5	18.00-33	330.2	838.2	63.5	574.6	2114	82.7	749.2	27	223	AQ3313002505EM	AQ2533EN	AQ33EMS01	AQ33EM
25×13.00/2.5	18.00-25	330.2	635	63.5	574.6	2114	82.7	546	27	178	AQ2513002505EM	AQ2525	AQ25EML01	AQ25EM
25×15.00/3.0	21.00-25	381	635	76.2	574.6	236.5	82.7	56	27	195	AQ2515003006EM	AQ3025	AQ25EML01	AQ25EM
25×22.00/3.0	26.5-25	558.8	635	76.2	574.6	328.6	82.7	546	27	223	AQ2522003005EM	AQ3025	AQ25EMLO1	AQ25EM
25×25.00/3.5	29.5-25	635	635	88.9	574.6	363.8	82.7	546	27	243	AQ2525003505EM	AQ3525	AQ25EMLO1	AQ2SEM
25×24.00/3.0	30/65-25	610	635	76.2	574.6	352.7	82.7	546	27	234	AQ2524003005EM	AQ3025	AQ25EML01	AQ25EM
29×17.00/3.5	24.00-29	431.8	726.6	88.9	676.2	263.6	82.7	647.6	27	255	AQ2917003505EM	AQ3529	AQ29EML01	AQ29EM
29×22.00/3.0	26.00-29	558.8	736.6	762	676.2	327.1	82.7	647.6	27	273	AQ2922003005EM	AQ3029	AQ29EML01	AQ29EM
33×13.00/2.5	18.00-33	330.2	838.2	62.5	777.8	212.8	82.7	803.2	27	225	AQ3313002505EM	AQ2533	AQ33EML01	AQ33EM
33×17.00/2.5	24.00-33	431.8	838.2	88.9	777.8	236.6	82.7	803	27	283	AQ3317003505EM	AQ3533	AQ33EML01	AQ33EM
33×28.00/3.5	35/65-33	711.2	838.2	88.9	777.8	403.3	82.7	803.2	27	347	AQ3328003505EM	AQ3533	AQ33EML01	AQ33EM
35×15.00/3.0	18.00-35	381	889	762	828.6	238.2	82.7	854	27	276	AQ3513003005EM	AQ3035	AQ35EML01	AQ3SEM
35×17.00/3.0	21.00-35	431.8	889	88.9	828.9	263.6	82.7	854	27	309	AQ3517003505EM	AQ3535	AQ35EML01	AQ35EM
29×17.00/3.5	24.00-29	431.8	736.6	88.9	679.2	261.9	90.6	631.8	35	256	AQ2917003005EM	AQ3529	AQ29EML01	AQ29EM
29×22.00/3.0	26.50-29	558.8	136.6	76.2	676.2	328.6	90.6	631.8	35	273	AQ2922003005EM	AQ3029	AQ29EML01	AQ29EM
29×24.00/3.0	30/65-29	609.6	736.6	76.2	676.2	355.2	90.6	631.8	35	289	AQ2924003005EM	AQ3029	AQ29EML01	AQ29EM
29×24.00/3.5	26.5-29	609.6	736.6	88.9	676.2	355.2	90.6	631.8	35	204	AQ2924003505EM	AQ3529	AQ29EML01	AQ29EM
29×25.00/3.5	29.5-29	635	736.6	88.9	6762	363.5	90.6	631.8	35	301	AQ2925003505EM	AQ3529	AQ29EML01	AQ29EM







非标定制异型车轮

Non-standard customized special-shaped wheels

轮辋规格 Rim Size	推荐配用轮胎 Standard Tyre	主要尺寸 Component Size(mm)								重量 Weight (kg)	配件代码 Accessories Code			
		A	B	C	D	E	F	G	H		轮辋体 Rim Body	挡圈 Side Ring	活动座圈 Boad Seat	锁圈 Lock Ring
33×13.00/2.5	18.00-33	330.2	838.2	62.5	777.8	205.6	90.6	733.4	35	253	AQ3313002505EM	AQ2533	AQ33EML01	AQ33EM
33×17.00/3.5	24.00-33	431.8	8382	88.9	777.8	261.9	90.6	733.4	35	282	AQ3317003505EM	AQ3533	AQ33EML01	AQ33EM
33×28.00/3.5	35/65-33	711.2	838.2	88.9	777.8	405.7	90.6	733.4	35	328	AQ3328003505EM	AQ3533	AQ33EML01	AQ33EM
35×15.00/3.0	18.00-35	381	889	76.2	828.6	236.5	90.6	784.2	35	292	AQ3513003005EM	AQ3035	AQ35EML01	AQ35EM
35×17.00/3.5	21.00/35	431.8	889	88.9	828.6	261.5	90.6	784.2	35	323	AQ3317002505EM	AQ3535	AQ35EML01	AQ35EM
33×13.00/2.5	18.00-33	330.2	838.2	63.5	777.2	220.4	90.6	768	35	251	AQ3513002505EM	AQ2533	AQ33EV	AQ33EV
33×22.00/4.0	27.00-33	558.8	838.2	101.6	777.2	334.7	90.6	768	35	301	AQ3322004005EM	AQ4033	AQ33EV	AQ33EV
33×28.00/3.5	35/65-33	711.2	838.2	88.9	777.2	410.9	90.6	763	35	327	AQ3328003505EM	AQ3533	AQ33EV	AQ33EV
33×28.00/4.0	33.5-33	711.2	838.2	101.6	777.2	410.9	90.6	763	35	385	AQ3332004005EM	AQ4033	AQ33EV	AQ33EV
35×15.00/3.0	21.00-35	381	889	76.2	828	245.8	90.6	818.8	35	292	AQ3515003005HD	AQ3035	AQ35EV	AQ35EV
35×17.00/3.5	24.00-35	431.8	889	28.9	828	271.2	90.6	818.8	36	323	AQ3517003505HD	AQ3535	AQ35EV	AQ35EV
35×27.00/3.5	33.25-35	685.6	889	88.9	828	398.1	90.6	818.8	36	528	AQ3527003505HD	AQ3535	AQ35EV	AQ35EV
35×31.00/4.0	37.25-35	787.4	889	101.6	828	449	90.6	761.6	36	569	AQ3530040085HD	AQ4035	AQ35EV	AQ35EV
39×28.00/4.0	33.5-39	111.2	990.6	101.6	929.6	410.9	90.6	920.4	36	493	AQ3928004005HD	AQ4039	AQ39EV	AQ39EV
39x32.00/4.0	50/65-39	812.8	990.6	101.6	929.6	461.7	90.6	920.4	36	529	AQ3932004005HD	AQ4039	AQ39EV	AQ39EV
39x32.00/4.5	41.25/70-39	812.8	990.6	114.3	929.6	461.7	90.6	920.4	36	562	AQ3932004005HD	AQ4539	AQ39EV	AQ39EV
45x36.00/4.5	45/65-45	9144	1143	114.3	1082	512.5	90.6	1020	36	739	AQ4536004505HD	AQ4545	AQ45EV	AQ45EV
49×15.00/3.0	21-49	381	1244.6	76.2	1184	245.8	90.6	1174	36	457	AQ4915003005HD	AQ3049	AQ49EV	AQ49EV
49x17.00/3.5	24-40	431.8	1244.6	88.9	1184	271.2	90.6	1174	36	489	AQ4917003505HD	AQ3549	AQ49EV	AQ49EV
49x19.50/4.0	27.00-49	495.3	1244.6	101.6	1184	303	90.6	1174	36	537	AQ4919504005HD	AQ4049	AQ49EV	AQ49EV
49×22.00/5.0	31.80-49	558.8	1244.6	114.3	1184	334.7	90.6	1174	36	553	AQ4922003505HD	AQ4049	AQ49EV	AQ49EV
33×22.00/3.5	27.00-33	558.8	838.2	101.6	771.2	335		710.7	47	391	AQ3322004005HD	AQ4033	AQ33EV	AQ33EV
33×28.00/5.0	35/65-33	711.2	838.2	88.9	771.2	411.1		710.7	47	403	AQ3328003505HD	AQ3533	AQ33EV	AQ33EV
33x28.22/4.0	33.5-33	711.2	838.2	101.6	771.2	411.1		710.7	47	412	AQ3332004005HD	AQ4033	AQ33EV	AQ33EV
33x32.00/4.5	37.5-33	812.8	838.2	88.9	771.2	464.3		710.7	47	452	AQ3332004005HD	AQ4533	AQ33EV	AQ33EV
51×24.00/5.0	33.00-51	609.6	1295.4	127	1213	404.9	149	710.7	48	963	AQ5124005005HD	AQ5051	AQ51HD	AQ51HD
51×26.00/5.0	36.00-51	660.4	1295.4	127	1213	430.3	149	710.7	48	975	AQ5126005005HD	AQ5051	AQ51HD	AQ51HD
51×40.00/4.5	50/60-51	1016	1295.4	114.3	1213	608	149	710.7	48	1323	AQ5140004505HD	AQ4551	AQ51HD	AQ51HD
57×27.00/6.0	37.00-57	685.8	1447.8	152.4	1365	443	149	761.6	48	1251	AQ5727006005HD	AQ6057	AQ57HD	AQ57HD
57×29.00/6.0	40.00-57	736.6	1447.8	152.4	1365	470	149	761.6	48	1268	AQ5729006005HD	AQ5057	AQ57HD	AQ57HD
57×32.00/5.0	44/80-57	812.8	1447.8	127	1365	507	149	863.2	48	1383	AQ5732005005HD	AQ5057	AQ57HD	AQ57HD
57×32.00/6.0	46/90-57	812.8	1447.8	152.4	1365	512	149	863.2	48	1401	AQ5732006005HD	AQ6057	AQ57HD	AQ57HD
57×32.00/6.5	48/95-57	812.8	1447.8	165.1	1365	512	149	863.2	48	1422	AQ5732006505HD	AQ6557	AQ57HD	AQ57HD
57×34.00/6.0	50/90-57	863.6	1447.8	152.4	1365	534.4	149	1016	48	1635	AQ5734006005HD	AQ6057	AQ57HD	AQ57HD
57×36.00/6.0	50/80-57	914.4	1447.8	152.4	1365	584.2	149	1117	48	1538	AQ5736006005HD	AQ6057	AQ57HD	AQ57HD
57×44.00/50	55/80-57	1117.6	1447.8	127	1365	685.8	149	1117	48	1837	AQ5744005005HD	AQ5057	AQ57HD	AQ57HD
57×44.00/6.0	55.5/80-57	1117.6	1447.8	152.4	1365	685.8	149	1117	48	1913	AQ5744006005HD	AQ6057	AQ57HD	AQ57HD
57×47.00/5.0	60/85-57	1193.8	1447.8	127	1365	701	149	1117	48	1851	AQ5747005005HD	AQ5057	AQ57HD	AQ57HD
57×47.00/6.0	58/85-57	1193.8	1447.8	152.4	1365	701	149	1117	48	1866	AQ5747006005HD	AQ6057	AQ57HD	AQ57HD
63×36.00/5.0	53/80-63	914.4	1600.2	127	190.5	6152				2653	AQ6336005005HD	AQ1720T	AQ63HD	AQ20T
63×41.00/5.0	55/80-63	1041.4	1600.2	127	190.5	678.7				2828	AQ6341005005HD	AQ1721T	AQ63HD	AQ21T
63×44.00/5.0	58/80-63/ 59/80-63	1117.6	1600.2	127	190.5	701.8				2927	AQ6344005005HD	AQ1521T	AQ63HD	AQ21T

也可来图定制

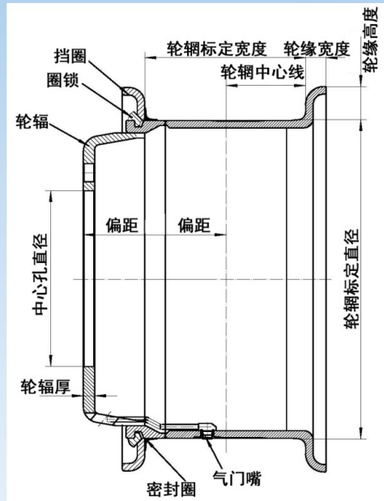

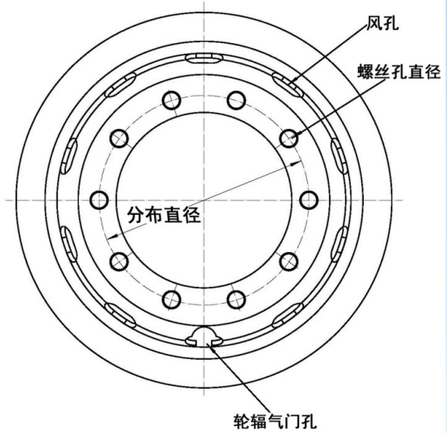







叉车车轮 Forklift wheel

叉车钢圈技术参数
CHACHEGANGQUANJISHUCANSHU

序号 No.	钢圈型号 Rim Type	轮胎型号 Tyre Model	中孔 C.B.D	螺栓孔/分布圆 Bolt Hole/P.C.D	固定孔/分布圆 Fixed hole/P.C.D	适用车型 Vehicle model
1	3.00D–8	5.00–8	110	5*15 140	5*10.5 154	长葛三轮车
2	3.50D–8	5.00–8	100	6*15 125	6*13 164	合力1.5吨后轮
		5.00–8	106	6*14.5 148	6*10.5 156	无锡电瓶车成都
		5.00–8	110	6*14 148	6*10 155	杭叉1.5吨后轮
3	4.00E–09	6.00–9	130	8*16 160	8*13 185	合力2.5吨后轮
		6.00–9	150	6*14 180	6*13 180	杭叉2吨后轮
		6.00–9	150	6*18 180	6*13 180	台励福2.5吨后轮
4	4.33R–9	7.00–9	140	6*16.5 170	6*13 170	合力2吨后轮
5	5.00F–10	6.50–10	130	8*16 160	8*13 185	合力3吨后轮
		6.50–10	140	6*17 170	6*13 195	杭叉3吨后轮
		6.50–10	150	6*18 180	6*13 190	台励福3吨后轮
		6.50–10	150	6*17.5 180	6*13 190	合力1.5吨前轮
6	5.00S–12	7.00–12	150	6*27 200	6*17 240	合力2吨前轮
		7.00–12 7.00–12	145 180	8*27 190 5*24.5 225	8*17 240 5*17 240	台励福2.5吨后轮 杭叉
7	6.50–15	8.25–15	200	6*32.5 250		合力5吨后轮凹顶
		8.25–15	240	10*32.5 290		合力5吨前轮凸顶
		8.25–15	240	8*32.5 290		杭叉5吨前轮
8	7.50T–15	28*9–15	150	6*32.5 200		合力3吨前轮
		28*9–15	180	6*23 220		杭叉3吨前轮
		28*9–15	165	8*27 210		台励福3吨前轮

序号 No.	产品名称 Rim Model	螺栓孔 Bolt Hole			中心孔 C.B.D	偏距 Offset	配用轮胎 Tyre Model	适用车型 Vehicle model
		孔数 Holes	直径Φ Diameter	分布圆Φ P.C.D	直径Φ Diameter	mm		
9	7.00T–16	6	32.5	250	200	87	9.00–16	叉车4吨前轮
10	7.00T–16	5	32	360	200	10		叉车8吨后轮
11	7.00T–16	8	32	260	200	82		叉车8吨后轮
12	7.00T–16	6	32	240	180	70		叉车8吨后轮
13	7.00T–20	10	32	390	340	143	9.00–20	叉车10吨前轮
14	7.00T–20	8	32	335	281	30		叉车10吨前轮
15	7.00T–20	6	15	302	270	–13		林业机械

也可来图定制

农林机械车轮 Agricultural wheel

型号 No.	轮辋厚度 Wheel rim thickness	轮辐厚度 Wheel spoke thickness	所配轮胎型号 Standard Tyre	型号 No.	轮辋厚度 Wheel rim thickness	轮辐厚度 Wheel spoke thickness	所配轮胎型号 Standard Tyre
12x6J	3	8	7.00-12	17.5x6.75	5	10	/
12x7J	3	8	10.0/80-12	18x9	5	10	12.5/80-15
12x8.0	3	8	AT29.5x9-12				11.5/80-18
12x8.5J	3	8	30X10-12	18x11	5	10	12.5/80-15
12x9.0	3	8	/				13.0/68-15
12x10.5	3	8	300/65-12	18x13	5	10	/
			320/60-12	19.5x7.50	6	12	240/70R19.5
14.5x6	5	10	26x12-12				
14.5x7	5	10	7-14.5	19.5x8.25	6	12	285/70R19.5
14.5x10	5	10	9-14.5				
15x5.0	3	8	14-14.5	19.5x11.75	6	12	385/65R19.5
15x7.0	3	8	6.0/80-15				
15x8.0	3	8	9.5L-15	19.5x14.00	6	12	445/65R19.5
			AT29.6x10-15				
			AT35x10-15	20x13	5	10	
			11L-15	20x9	5	10	
15x9	4	8	11L-15	20x11	5	10	315/55-20
15x10LB	3	8	12.5L-15	22.5x9.00	6	12	295/60R22.5
			12.5L-15				305/70R22.5
15x13LB	5	10	400/60-15.5	22.5x11.75	6	12	360/60-22.5
			31X15.5-15				385/65-22.5
15.3x9	4	10	10.0/75-15.3				15R22.5
			260/70-15.3				385/65R22.5
			300/80-15.6	22.5x13.00	7	14	400/55-22.5
			320/80-15.3				400/60-22.5
			11.5/80-15.3	22.5x14.00	6	12	18R22.5
			12.5/80-15.3				445/65R22.5
15.3x10				22.5x16.00	6	12	500/45-22.5
15.5x13	5	10	400/60-15.5				500/50-22.5
							500/60-22.5
16x6	5	10	6.50-16				550/45-22.5
16xW8	4	8	10.0/65-16				550/60-22.5
			9.50-16	22.5x20.00	6	12	600/50-22.5
16.5x8.25	5	10	10-16.5				600/55-22.5
16.5x9.75	5	10	12-16.5				650/50-22.5
16.5x12	5	10	33x15.5-16.5	22.5x24.00	6	12	700/40-22.5
16.5x13	5	10	33x15.5-16.5				700/50-22.5
17x13	5	10	15.0/55-17				710/40-22.5
17x16	5	10	500/50-17	22.5x28	6	12	800/45-22.5
			19.0/45-17	26.5x20	6	12	600/55-26.5
17.5x10.5	5	10	14x17.5	26.5x24	6	12	700/50-26.5
17.5x11.75				26.5x28	6	12	800/45-26.5
17.5x14				6Jx14	3	8	

适用于拖拉机、农用运输车、联合收割机、农用挂车和其它农林机械配充气轮胎的车轮



农林机械车轮 Agricultural wheel

序号 No.	轮辋厚度 Wheel rim thickness	轮胎型号 Standard Tyre
1	14x6J	215/75R14LT
2	14x7J	235/70R14LT
3	14x7.5J	255/75R14LT
4	15x6J	215/75R15LT
5	15x7.5J	255/75E15LT
6	15x10	32x10.50R15LT
7	16xW7	235/60x16ST
8	16x10	32x10.50R15LT
9	16.5x6.75	9R16.5
10	17.5x8.25	11R17.5
11	20xW7	8.3-20
12	20xW8	9.5-20
13	20xW9	11.2-20
14	20xW10	11.2-20
		14.00-20
		16.00-20
15	24xW10	11.2.-24
		14.00-24
		16.00-24
16	24xW12	13.6-24
17	24xW13	16.9-24
18	24xW14	15.5-24
19	24xW15	16.9-24
20	24xW16	18.4-24
21	24xW18	20.8-24
22	DW20x26	23.1-26
23	DW15x28	16.9-28














Wheel Hub 车轮配套轮毂产品

技术参数
Technical Specifications

序号 No.	品名 Items	型号 Models	内轴承 Inner bearing	外轴承 External bearings	外盘 external market	盘孔 Disk hole	盘孔分度圆 P.C.D	刹车子口 Pilot Dia	总高 Height	成品重 Weight
1	前轮毂 Front Hub	40T(90149417254)	Φ215深58	Φ190深43	Φ466	18--Φ24	Φ425	Φ392	305.5mm	71.6kg
2		50T(90149418504)	Φ230深69	Φ215深55	Φ542.5	18--Φ24	Φ500	Φ466	365mm	116kg
3	后轮毂 Rear Hub	40T(90149417254)	Φ250深64	Φ230深58	Φ466	18--Φ24	Φ425	Φ392	240mm	71.4kg
4		50T(90149418504)	Φ310深58	Φ310深55	Φ542	18--Φ24	Φ500	Φ467.5	243mm	78.9kg
5	轮边 Wheel Edge	40T（6143）	内孔Φ350.5		Φ460	18--Φ24.25	Φ425	钢圈子口 Φ375	354mm	58.4kg
6	六福轮轮毂 6-Spoke Wheel	16T	Φ200深50	Φ150深50.5	Φ579	6--Φ21	Φ335	Φ290	286mm	60.2kg
7	九福轮轮毂 9-Spoke Wheel		内孔Φ281		Φ580	10--Φ26	Φ335		226.5mm	60.4kg


序号 No.	品 名 Items	型 号 Models	适配轮胎 Tyre Model	总 高 Height	外 径 O.D.	成 品 重 Weight
1	三瓣式轮辋 3-Piece Split Rim	8.5-20	12.00-20	266.8mm	605.8mm	39kg
		8.5-24	12.00-24	266.8mm	700mm	47.4kg
		10.00-20	14.00-20	307mm	605.8mm	48.5kg



六辐轮毂



九辐轮毂



40吨轮边



40吨
前轮毂18孔



40吨
后轮毂18孔



50吨
前轮毂18孔



50吨
后轮毂18孔



三瓣式
轮辋