G-COMIN

TL-600

SINGLE-PERSON OPERATED
BATTERY-POWERED
MOBILE LIGHT TOWER



View Actual
Product Video

SHENZHEN COMING TECHNOLOGY CO., LTD

+86-755-28462760 Shenzhen, China

www.co-ming.com info@co-ming.com

Now Entering
The Battery Era



VS



TL-600
Battery Powered
Mobile Light Tower



0dB Quiet Operation



0 Diesel Cost



0 Carbon Emissions



0 Maintenance Cost



0 Trailer Cost

Traditional
Diesel Light Tower



Noise
Hearing Damage



Fuel
Continuous Cost Increases



Fumes
Health Threat



Maintenance
Frequent & Tedious



Transportation
Costly & Inefficient

A Smarter Alternative to Diesel Light Towers



82kg-Class Single-Person Rapid Deployment

LFP Battery Powered Versatile For Various Sites

All-Terrain Wheels + Stabilizing Outriggers


360° Horizontal + 270° Vertical Per Lamp Head

IP65 Weatherproof Wind Resistance Level 8

Narrow, Wide and Medium Beam Angles for Different Lighting Areas

Maximum Output Up To 105,000 LM


3 Brightness Levels

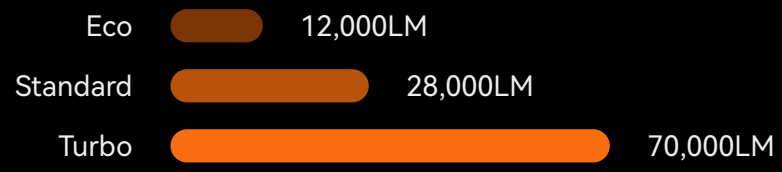

Boost Mode



Switch beam angle with one click

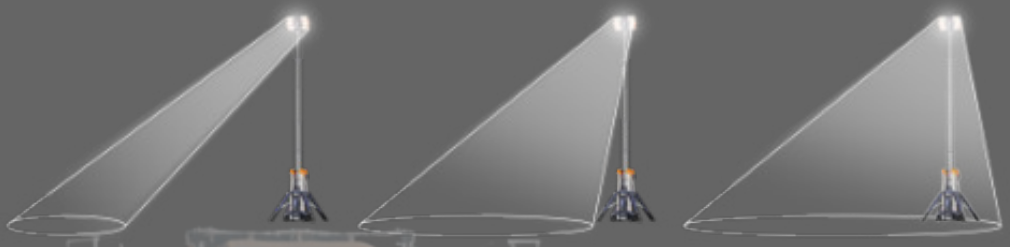

Typical Working Hours (3 x D70-1000)

10 - 70 HOURS

(Turbo) (Eco)



Battery Power

Adapter Power


D70-1000 (7.1kg)

Max 3 interchangeable batteries at once

XVE550 (1.9kg)

Power light tower & charge its batteries

Intelligent Lighting Control

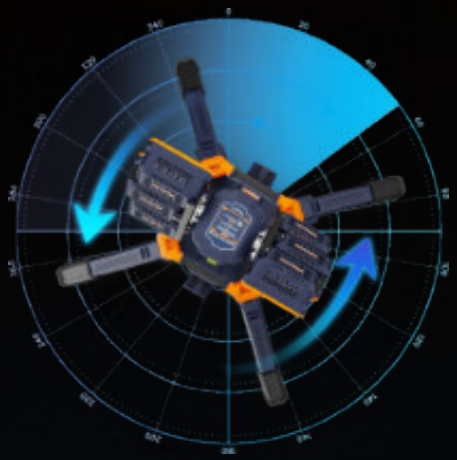

Patrol Mode

Unique automatic 360° patrol mode

360° Horizontal Rotation



270° Vertical Rotation



Independent left & right module rotation



All-Weather Available

IP65 Waterproof



Sandy
Sand & dust resistant




Rainy
IP65 waterproof



Scorching
UV & Heat resistance



Snowy
Operating temperature
down to -15°C

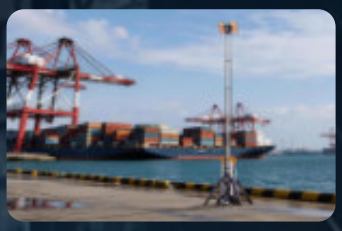

Corrosive
Coastal corrosion resistant



Windy
60km/h Wind resistance

Humanized Design Hidden In The Details


Warning Light Slots




Grip & Lift Handle



Easy Control & Storage

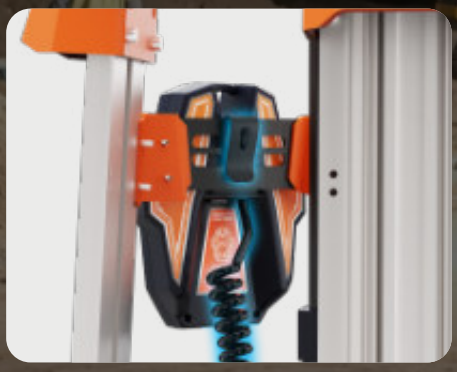

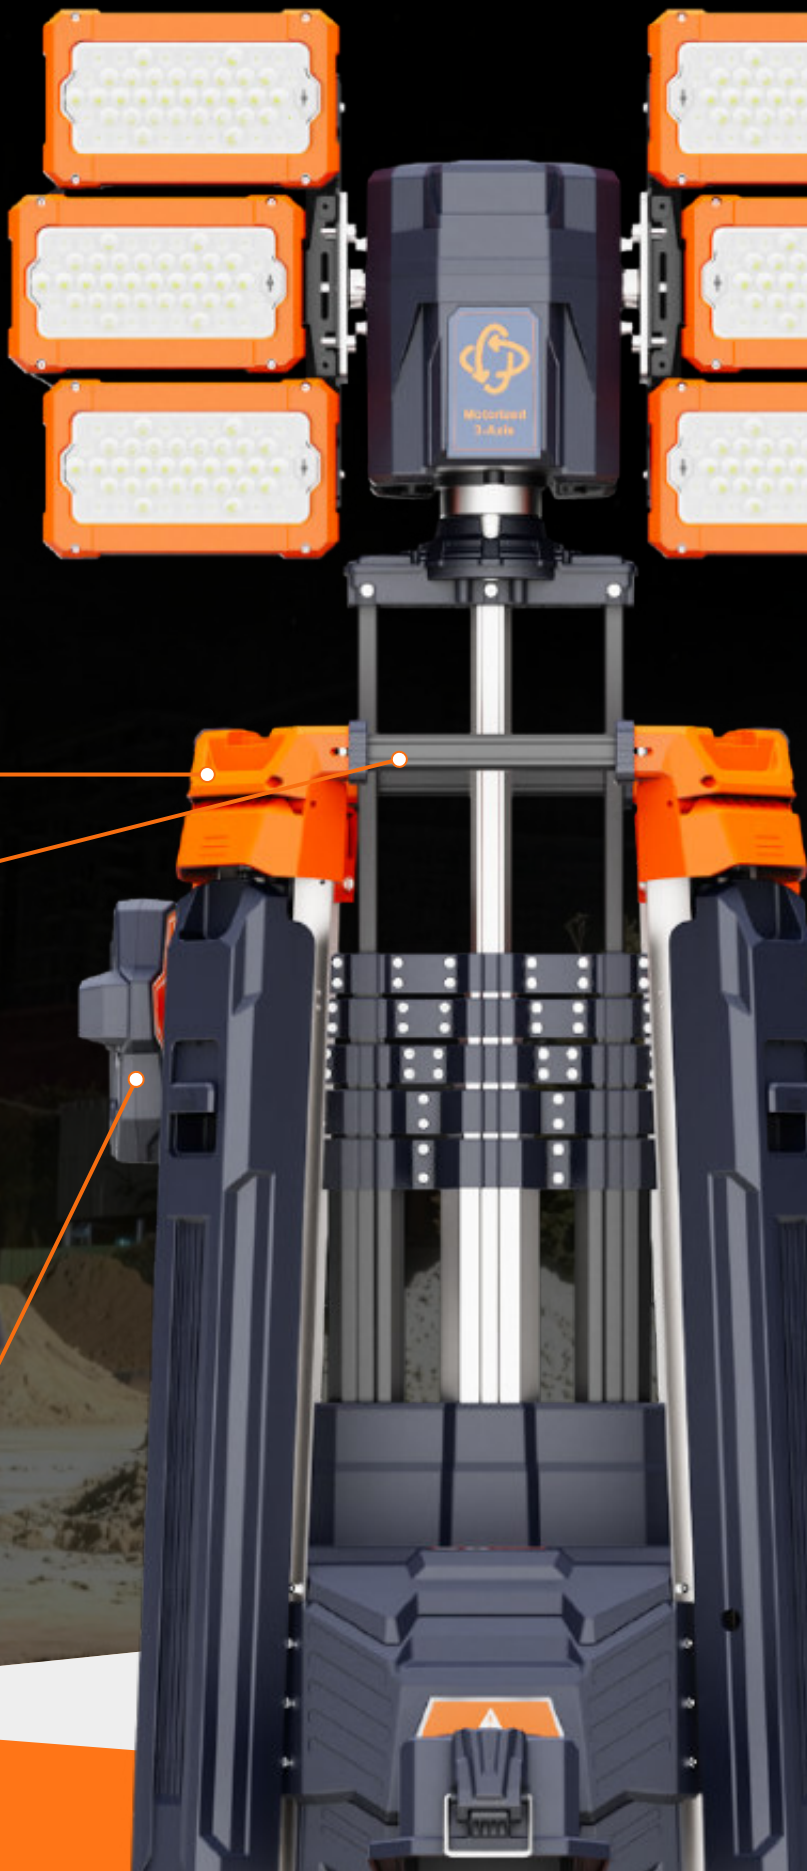


Waterproof Toolbox



Power Switch

One-button battery power-off

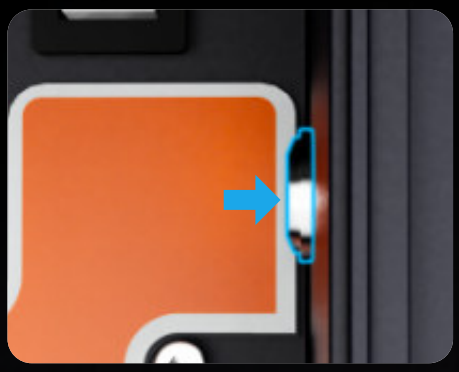

Manual Emergency Retract

Dual-clutch design





All-Terrain Wheels & Stabilizing Outriggers



Quick Release Unlock

Multi-Level Self-Locking Support Legs

Dual-Axis Level

Large Rear Wheels

Swivel Casters with Brakes

Optional Accessories



Battery (D70-1000)



Backup Case (TKC-3)



Solar Panel (FS2-150)




Adapter (XVE550)




Flash Light (S3)



Lighting Wherever You Need It



Construction



Mining




Emergency




Power Grid




Firefighting



Maintenance




Events



Sports



Oil & Gas

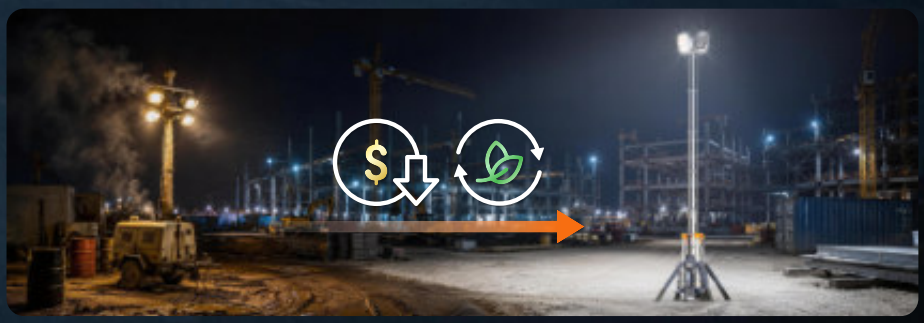

Energy-Saving Upgrade for Traditional Light Towers





Parameters

TL-600


General Specifications	
Height	1.6~6.0m
Weight	82.0kg (Fitting only)
Power Supply	Adapter Power / Battery Power / Solar Power
IP Grade	IP65
Input Voltage	DC 70.4V (Battery) / DC 80.3V (Adapter)
Output(USB)	Type-A (5V 2A) & Type-C (5V 2A)
Rotation Angles	360° Horizontal + 270° Vertical Per Lamp Head
Working Temp	-15℃-50℃

Battery Power		
Brightness Levels	Lumens	Run Times (3 x D70-1000)
Eco	12000 lm	70 h
Standard	28000 lm	22 h
Turbo	70000 lm	10 h
Boost	105000 lm	-


Package

Model	TL-600
Size of Carton	690x720x1750mm
Gross Weight of Carton	100kg
PCS/Carton	1



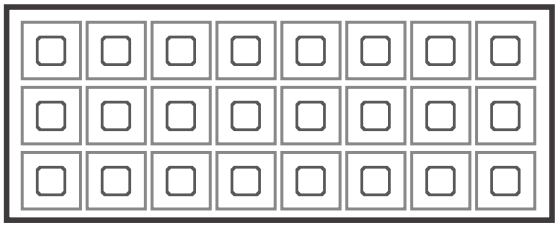

20GP Container 24 Unit

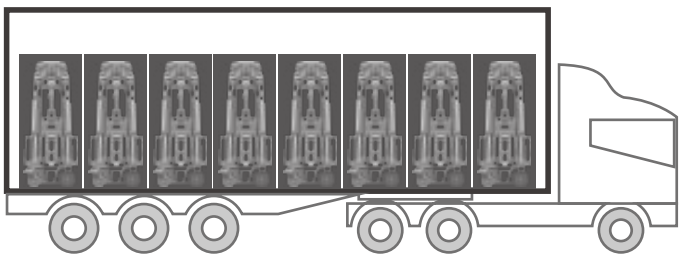

40GP Container 48 Unit

Size (mm)

