
CDK90.8

HYDRAULIC DERRICK CRANE

TECHNICAL DATA SHEET

CDK90

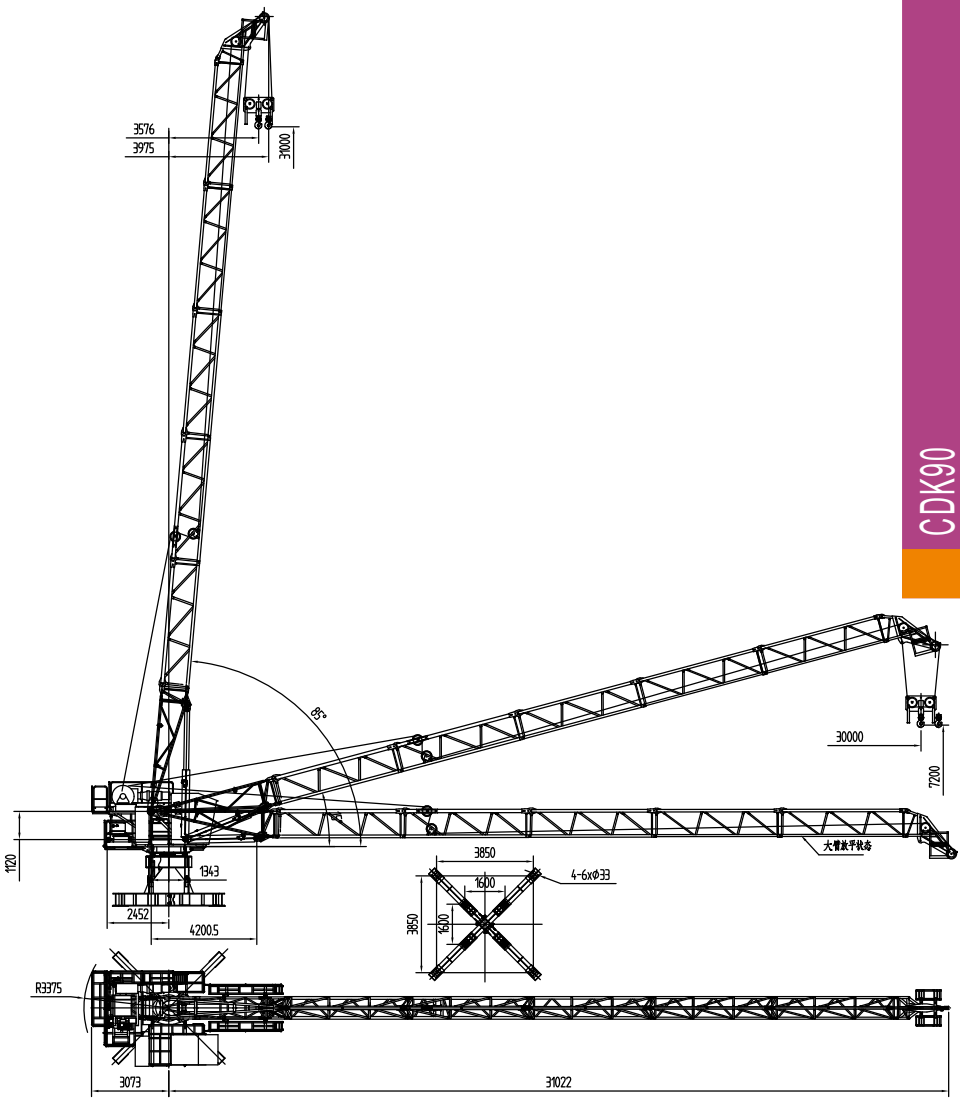

CDK90

LOAD CAPACITY

		5	7.5	10	12.5	15	17.5	20	22.5	25	27.5	30	m
1f	4t-20.15m	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.42	2.90	2.47	2.10	t
2f	6t-15.54m	6.00	6.00	6.00	6.00	6.00	5.04	4.05	3.42	2.90	2.47	2.10	t

		5	7.5	10	12.5	15	17.5	20	22.5	25	m
1f	4t-24.00m	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.75	t
2f	8t-14.6m	8.00	8.00	8.00	8.00	7.77	6.00	5.29	4.42	3.75	t

		5	7.5	10	12.5	15	17.5	20	m
1f	4t-20.00m	4.00	4.00	4.00	4.00	4.00	4.00	4.00	t
2f	8t-15.12m	8.00	8.00	8.00	8.00	8.00	6.69	5.59	t

MECHANISM

	Hoisting mechanism				Rope length
	1 FALL	m/min	0~120	37kW	500m
		t	0~4		
	2 FALLs	m/min	0~60		
		t	0~8		

	Luffing mechanism			Slewing mechanism	
	≤3min	22kW		0-0.67r/min	4kW
Power supply	380V(±5%) 50Hz		Power consumption	63kVA	

CANTON TINGSING CONSTRUCTION MACHINERY CO., LTD

MOBILE:+8613924882909

TEL:86-757-86713673

E-MAIL:hebinye@163.com

COMPANY ADDRESS:GUICHENG SUBDISTRICT, NANHAI DISTRICT, FOSHAN CITY, GUANGDONG PROVINCE, P.R.CHINA

FACTORY ADDRESS: HESHAN, JIANGMEN CITY, GUANGDONG PROVINCE, P.R.CHINA

TINSUNG