





ZL936
Wheel Loader



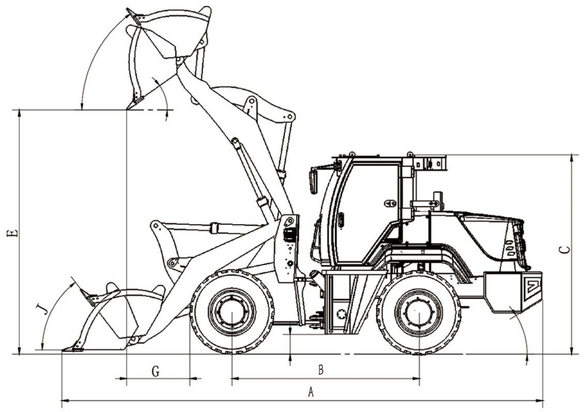

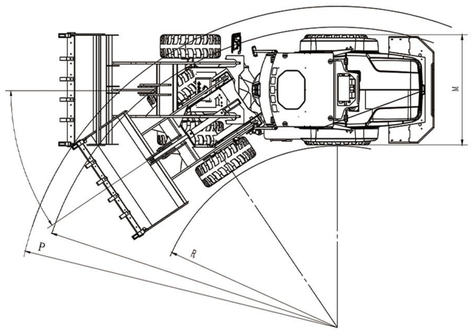

ZL936 Wheel Loader

General	
Model	ZL936
Rated Load Capacity	2300kg
Operating Weight	6840kg
Operation Dimensions	
Total Travel Length(A)	6745mm
Total Travel Height(C)	2780mm
Total Travel Width(M)	2240mm
Wheel Base(B)	2628mm
Track	1710mm
Engine	
Model	YCD4J22T-115
Power Model	Diesel
Transmission	
Model	280
Gear	2F+1R
Hydraulic System	
Hydraulic Pump	CBHP2080
Variable Speed Pump	CBFC25Z
Working Pressure	16mpa
Operation Parameters	
Bucket Capacity	1m³
Max.Dumping Height(E)	3500mm
Min.Dumping Distance(G)	880mm
Max.Dumping Angle(J)	35°
Lifting Time	6s
Unloading Time	2.2s
Falling Time	6.3s
Max.Turning Radius(P)	5700mm
Min.Ground Clearance(R)	320mm
Tire	16/70-24

HIGH PERFORMANCE HYDRAULIC CYLINDER

POWERFUL ENGINE

LOW FUEL CONSUMPTION AND HIGH PERFORMANCE

WEAR-RESISTANT TYRE

ULTRA-HIGH SECURITY

Product Features

- **Wide Openable Engine Hood Large:**
  Hood door for easy access to internal components, simplifying daily inspection and maintenance.
- **Precise Steering System:**
  Multi-spoke steering wheel paired with high-performance steering gear delivers quick response, accurate control and excellent handling.
- **Center Articulated Design:**
  Small steering angle and tight turning radius ensure great maneuverability even in narrow spaces.
- **Large-capacity Wear-resistant Bucket:**
  Wide-mouth bucket with large loading capacity. Lined with high-strength wear plates for long service life, ideal for heavy-duty operations.
- **Premium Shock-absorbing Seat:**
  Ergonomic design with superior wrapping and multi-level shock absorption, easing bumps for comfortable rides on rough roads.
- **Spacious & Ergonomic Cabin:**
  Designed for maximum comfort, reducing operator fatigue during long shifts.High-quality insulation effectively blocks out dust and noise, creating a quiet and clean workspace.
- **Heat-treated Wear-resistant Pins & Bushings:**
  Critical connecting parts are quenched for high hardness, wear and impact resistance, extending service life.
- **High-quality Hydraulic Pipeline System:**
  Heat-resistant and anti-aging hoses combined with standard large-flow joints for superior sealing and leak-proof performance.
- **Dynamically Balanced Drive Shaft:**
  Precision dynamic balancing ensures smooth transmission, low vibration and noise, and high reliability.