

专业品质 超越价值
Professional quality beyond value

“ **企业产品展示** ”

我振动 你心动 弘升振动

新乡市弘升振动电机有限公司

XINXIANG HONGSHENG VIBRATION MOTOR CO., LTD

电话/Tel: +86-0373-3082526 / 5291289

网址/Web: www.hszd.cn

邮箱/E-mail: xxhszd@163.com

地址/Add: 河南省新乡市经济技术开发区经九路与支二路交叉口西北角
Northwest corner of the intersection of Jingjiu Road and Zhi'er
Road in Xinxiang Economic and Technological Development
Zone, Xinxiang City, Henan Province

新乡市弘升振动电机有限公司

Xinxiang Hongsheng Vibration Motor Co., Ltd



专业生产振动电机、防爆振动电机制造商

新乡市弘升振动电机有限公司

新乡市弘升振动电机有限公司，专注于振动电机和防爆振动电机的研发、生产和销售。弘升振动是国家级高新技术企业，是新乡市振动电机工程技术研究中心。技术实力是弘升振动的核心竞争力。二十多年来，公司产品已畅销全国，并批量出口，产品的质量历经时间的考验，受到国内外用户的普遍赞誉。公司已通过ISO9001国际质量管理体系认证，并多次荣获国家、省、市有关部门颁发的多项荣誉称号。公司位于新乡经开区经九路与支二路交叉口，毗邻郑新快速路、京珠高速、京广铁路、高铁东站，交通便利，四通八达。厂区占地2万多平方米，卧式加工中心、立式加工中心等大型专用设备30多台(套)。产品全部采用CAXA、Unigraphics、SolidWorks辅助设计。同时，公司与多所学院共同建立产学研合作基地，加快了对新产品的开发和研制。

Xinxiang Hongsheng Vibration Motor Co., Ltd. specializes in the research and development, production and sales of vibration motors and explosion-proof vibration motors. Hongsheng Vibration is a national high-tech enterprise and the Xinxiang Vibration Motor Engineering Technology Research Center. Technological strength is the core competitiveness of Hongsheng Vibration. Over the past two decades, the company's products have been sold throughout the country and exported in large quantities. The quality of the products has been tested by time and has received widespread praise from domestic and foreign users. The company has passed the ISO9001 international quality management system certification and has won many honorary titles awarded by national, provincial and municipal authorities. The company is located at the intersection of Jingjiu Road and Zhi'er Road in Xinxiang Economic Development Zone, adjacent to Zhengxin Expressway, Jingzhu Expressway, Jingguang Railway and East High-speed Railway Station, with convenient transportation and easy access. The factory covers an area of more than 20,000 square meters, with over 30 sets of large-scale special equipment such as horizontal machining centers and vertical machining centers. All products are designed with the aid of CAXA, Unigraphics and SolidWorks. At the same time, the company has established a number of industry-university-research cooperation bases with many colleges and universities, accelerating the development and research of new products.



PRODUCT INTRODUCTION

产品介绍



公司主要生产ZW、HMVE、HZW、YZO/JZO系列卧式、ZL系列立式振动电机、ZLC、HMVEL系列侧板式振动电机、LZF系列防闭塞装置、YBZQ、YFBZ隔爆型振动电机。ZW、HZW系列立式振动电机是我单位自主研发的国内第二代通用型振动电机，HMVE系列是我单位自主研发的第三代与欧盟接轨的新型振动电机，立足市场多年实践积累，弘升振动精准捕捉用户需求，在借鉴国外先进技术的基础上，与科研单位紧密合作、联合攻关，从精心研制到持续改进更新，每一步都力求突破，只为铸就高品质振动解决方案，使其在新世纪的今天仍具有极强的生命力。产品采用先进的设计方案，选用优化的电磁设计，加装航空密封元件，配备特制专用轴承，使其具有启动力矩大、噪音小、重量轻、防护等级高、使用寿命长等优点。公司产品广泛用于矿产、冶金、铸造、电力、建材、化工、粮食、医药等行业，是各类振动输送、筛分、干燥、光饰、粉磨、破碎设备的理想动力源。

The company mainly produces ZW, HMVE, HZW, YZO/JZO series horizontal and ZL series vertical vibration motors, ZLC, HMVEL series side plate vibration motors, LZF series anti blocking devices, YBZQ, YFBZ explosion-proof vibration motors. The ZW and HZW series vertical vibration motors are the second generation universal vibration motors independently developed by our unit in China. The HMVE series is the third generation new vibration motor independently developed by our unit that is in line with the European Union. Based on years of practical experience in the market, Hongsheng Vibration accurately captures user needs. On the basis of drawing on advanced foreign technology, we closely cooperate and jointly tackle problems with scientific research units. From careful development to continuous improvement and updating, we strive for breakthroughs at every step, only to create high-quality vibration solutions that still have strong vitality in today's new century. The product adopts advanced design schemes, selects optimized electromagnetic design, installs aviation sealing components, and is equipped with specially designed bearings, making it have the advantages of high starting torque, low noise, light weight, high protection level, and long service life. Our company's products are widely used in industries such as mining, metallurgy, casting, electricity, building materials, chemical, grain, and medicine. They are the ideal power source for various vibration conveying, screening, drying, polishing, grinding, and crushing equipment.



CORPORATE PATENT

企业专利



专利产品 权威认证

Patented product Authoritative certification





目录

ZW系列..... 01
ZW series

HMVE系列..... 05
HMVE series

HMVEL系列..... 09
HMVEL series

HZW系列..... 11
HZW series

YBZQ(EX db IIB T4 Gb)系列..... 15
YBZQ(EX db IIB T4 Gb) series

YBZQ(EX db I Mb)系列..... 16
YBZQ(EX db I Mb) series

JZO/YZO系列..... 17
JZO/YZO series

ZL系列..... 18
ZL series

LZF系列..... 19
LZF series

ZLC系列..... 19
ZLC series

YFBZ(Ex tb IIIC T130℃ Db)系列..... 20
YFBZ(Ex tb IIIC T130℃ Db)series

技术参数

- 1.绝缘等级: B/F/H
- 2.防护等级: IP55/IP65/IP66
- 3.电源电压: 220V/380V/440V/660V
- 4.电源频率: 50Hz/60Hz
- 5.相 级: 3相
- 6.工作方式: 连续/间断

ZW系列振动电机技术参数

The teohnical and installation size of ZW series vibrator motors



2 POLES-3000 rpm


序号	型号Type	激振力Force (KN)	功率Power (KW)	电流Current (A)	重量Weight (Kg)	机座号
1	ZW-0.7-2	0.7	0.075	0.24	13	70
2	ZW-1.5-2	1.5	0.15	0.4	15	85
3	ZW-2.5-2	2.5	0.25	0.58	18	85
4	ZW-5-2	5	0.4	1.02	35	100
5	ZW-8-2	8	0.75	1.76	61	140
6	ZW-10-2	10	1.1	2.56	65	140
7	ZW-16-2	16	1.5	3.7	95	170
8	ZW-20-2	20	1.8	4.26	98	170
9	ZW-30-2	30	3	7.6	108	170

4 POLES-1500 rpm

序号	型号Type	激振力Force (KN)	功率Power (KW)	电流Current (A)	重量Weight (Kg)	机座号
1	ZW-1.2-4	1.2	0.1	0.34	16	85
2	ZW-2.5-4	2.5	0.1	0.34	24	85
3	ZW-5-4	5	0.25	0.65	40	120
4	ZW-8-4	8	0.4	1.16	68	140
5	ZW-10-4	10	0.55	1.59	63	140
6	ZW-16-4	16	0.75	1.91	105	140
7	ZW-20-4	20	1.1	2.81	105	140
8	ZW-25-4	25	1.5	3.84	110	170
9	ZW-32-4	32	2	4.69	165	170
10	ZW-40-4	40	2.2	5.1	180	225
11	ZW-50-4	50	2.5	6.3	253	225
12	ZW-75-4	75	4	10.18	320	230
13	ZW-100-4	100	6	15.8	365	230
14	ZW-120-4	120	8	19.6	520	260
15	ZW-140-4	140	10	24.16	630	260
16	ZW-160-4	160	12	28.5	680	260

ZW系列振动电机安装尺寸

The teohnical and installation size of ZW series vibrator motors

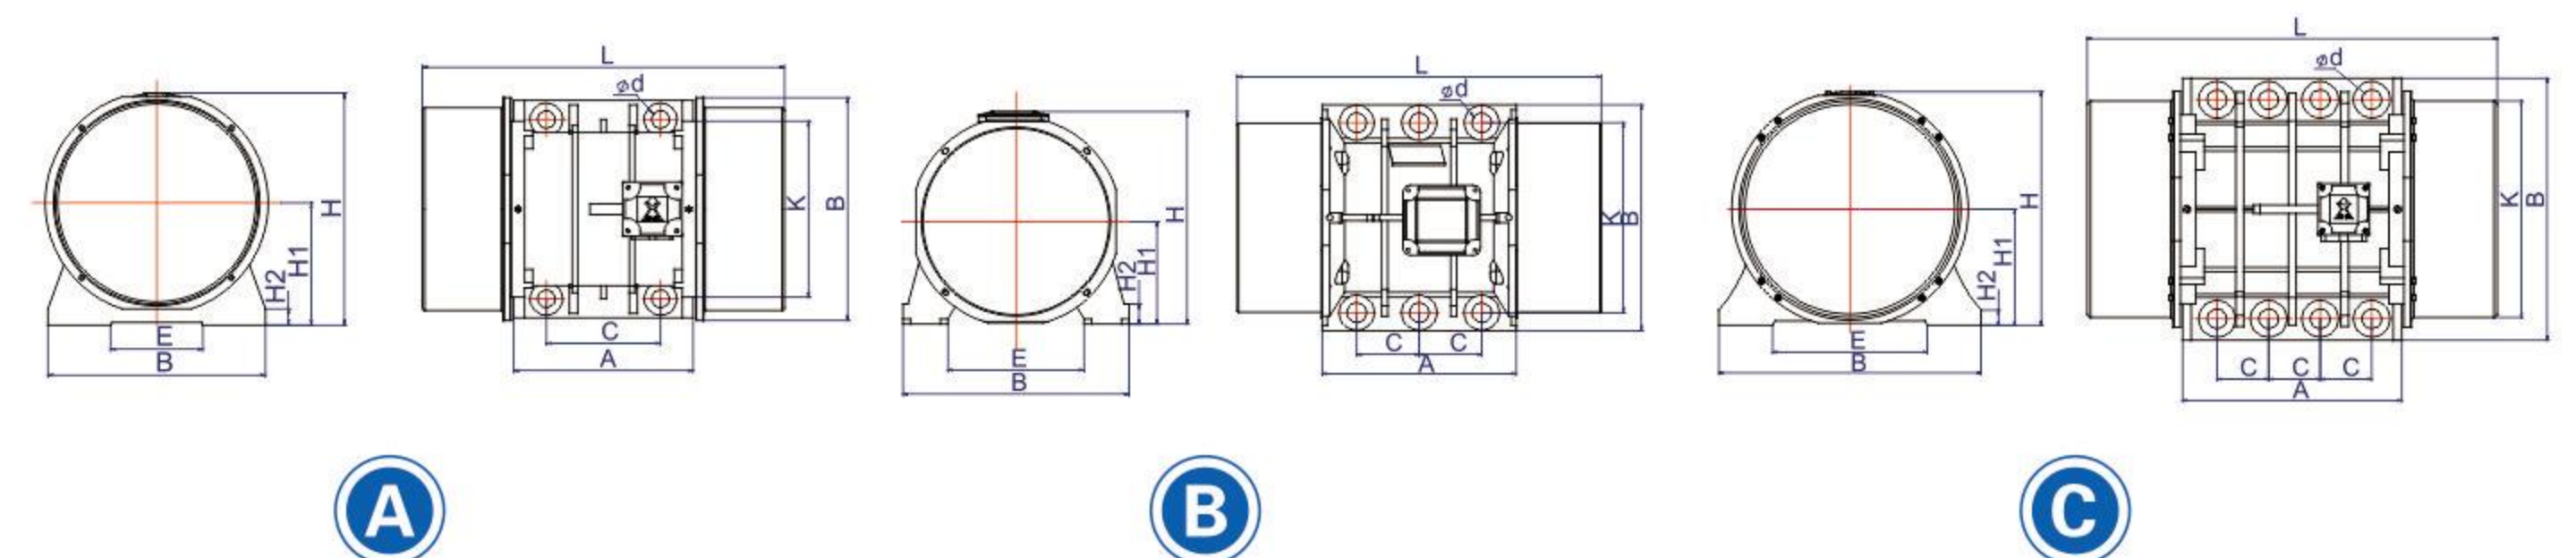

2 POLES-3000 rpm

序号	型号Type	安装尺寸(mm)			外形尺寸Dime ne ion(mm)							
		C	K	ϕd	L	A	B	E	H	H1	H2	图号
1	ZW-0.7-2	116	152	8	270	140	175	60	170	70	22	A
2	ZW-1.5-2	100	150	13	308	150	180	70	192	85	20	A
3	ZW-2.5-2	100	150	13	310	150	180	70	192	85	20	A
4	ZW-5-2	120	150	18	390	200	200	60	202	100	16	A
5	ZW-8-2	135	230	18	460	245	280	130	276	140	20	A
6	ZW-10-2	135	230	18	460	245	280	130	276	140	20	A
7	ZW-16-2	140	260	22	530	280	310	140	327	170	25	A
8	ZW-20-2	140	260	22	530	280	310	140	327	170	25	A
9	ZW-30-2	140	260	22	550	280	310	140	327	170	25	A

4 POLES-1500 rpm

序号	型号Type	安装尺寸(mm)			外形尺寸Dime ne ion(mm)							
		C	K	ϕd	L	A	B	E	H	H1	H2	图号
1	ZW-1.2-4	100	150	13	310	150	180	70	192	85	20	A
2	ZW-2.5-4	100	150	13	330	150	180	70	192	85	20	A
3	ZW-5-4	120	180	18	410	190	230	120	230	120	20	A
4	ZW-8-4	135	230	18	460	245	280	130	276	140	20	A
5	ZW-10-4	135	230	18	460	245	280	130	276	140	20	A
6	ZW-16-4	140	260	22	510	250	310	140	327	140	25	A
7	ZW-20-4	140	260	22	510	250	310	140	327	140	25	A
8	ZW-25-4	140	260	22	530	280	310	140	327	170	25	A
9	ZW-32-4	140	260	22	530	280	310	140	327	170	25	A
10	ZW-40-4	210	330	32	670	340	400	170	420	225	30	A
11	ZW-50-4	210	330	32	670	340	400	170	420	225	30	A
12	ZW-75-4	135	380	32	830	430	460	200	450	230	35	B
13	ZW-100-4	135	380	32	940	430	460	200	450	230	35	B
14	ZW-120-4	118	460	38	1010	520	550	340	520	260	38	C
15	ZW-140-4	118	460	38	1010	520	550	340	520	260	38	C
16	ZW-160-4	120	510	38	1010	520	550	340	520	260	38	C

ZW系列振动电机技术参数

The teohnical and installation size of ZW series vibrator motors




6 POLES-1000 rpm

序号	型号Type	激振力Force (KN)	功率Power (KW)	电流Current (A)	重量Weight (Kg)	机座号
1	ZW-2.5-6	2.5	0.2	0.71	43	120
2	ZW-5-6	5	0.4	1.23	50	120
3	ZW-8-6	8	0.55	1.68	80	140
4	ZW-10-6	10	0.75	2.3	76	140
5	ZW-16-6	16	1.1	3.35	110	140
6	ZW-18-6	18	1.1	3.65	120	140
7	ZW-20-6	20	1.5	3.8	115	140
8	ZW-26-6	26	1.9	4.8	134	170
9	ZW-30-6	30	2.2	5.52	158	200
10	ZW-40-6	40	3	7.7	184	200
11	ZW-50-6	50	3.7	9.8	252	225
12	ZW-75-6	75	5.5	13.3	365	230
13	ZW-100-6	100	7.5	18	460	230
14	ZW-120-6	120	9	23	625	260
15	ZW-130-6	130	10	25	635	260
16	ZW-140-6	140	12	28.5	650	260
17	ZW-150-6	150	13	31	670	260
18	ZW-160-6	160	14	32	740	270
19	ZW-180-6	180	16	36	800	270
20	ZW-200-6	200	18	40	950	270
21	ZW-260-6	260	20	44	1430	310
22	ZW-300-6	300	23	53	1460	310

ZW系列振动电机安装尺寸

The teohnical and installation size of ZW series vibrator motors

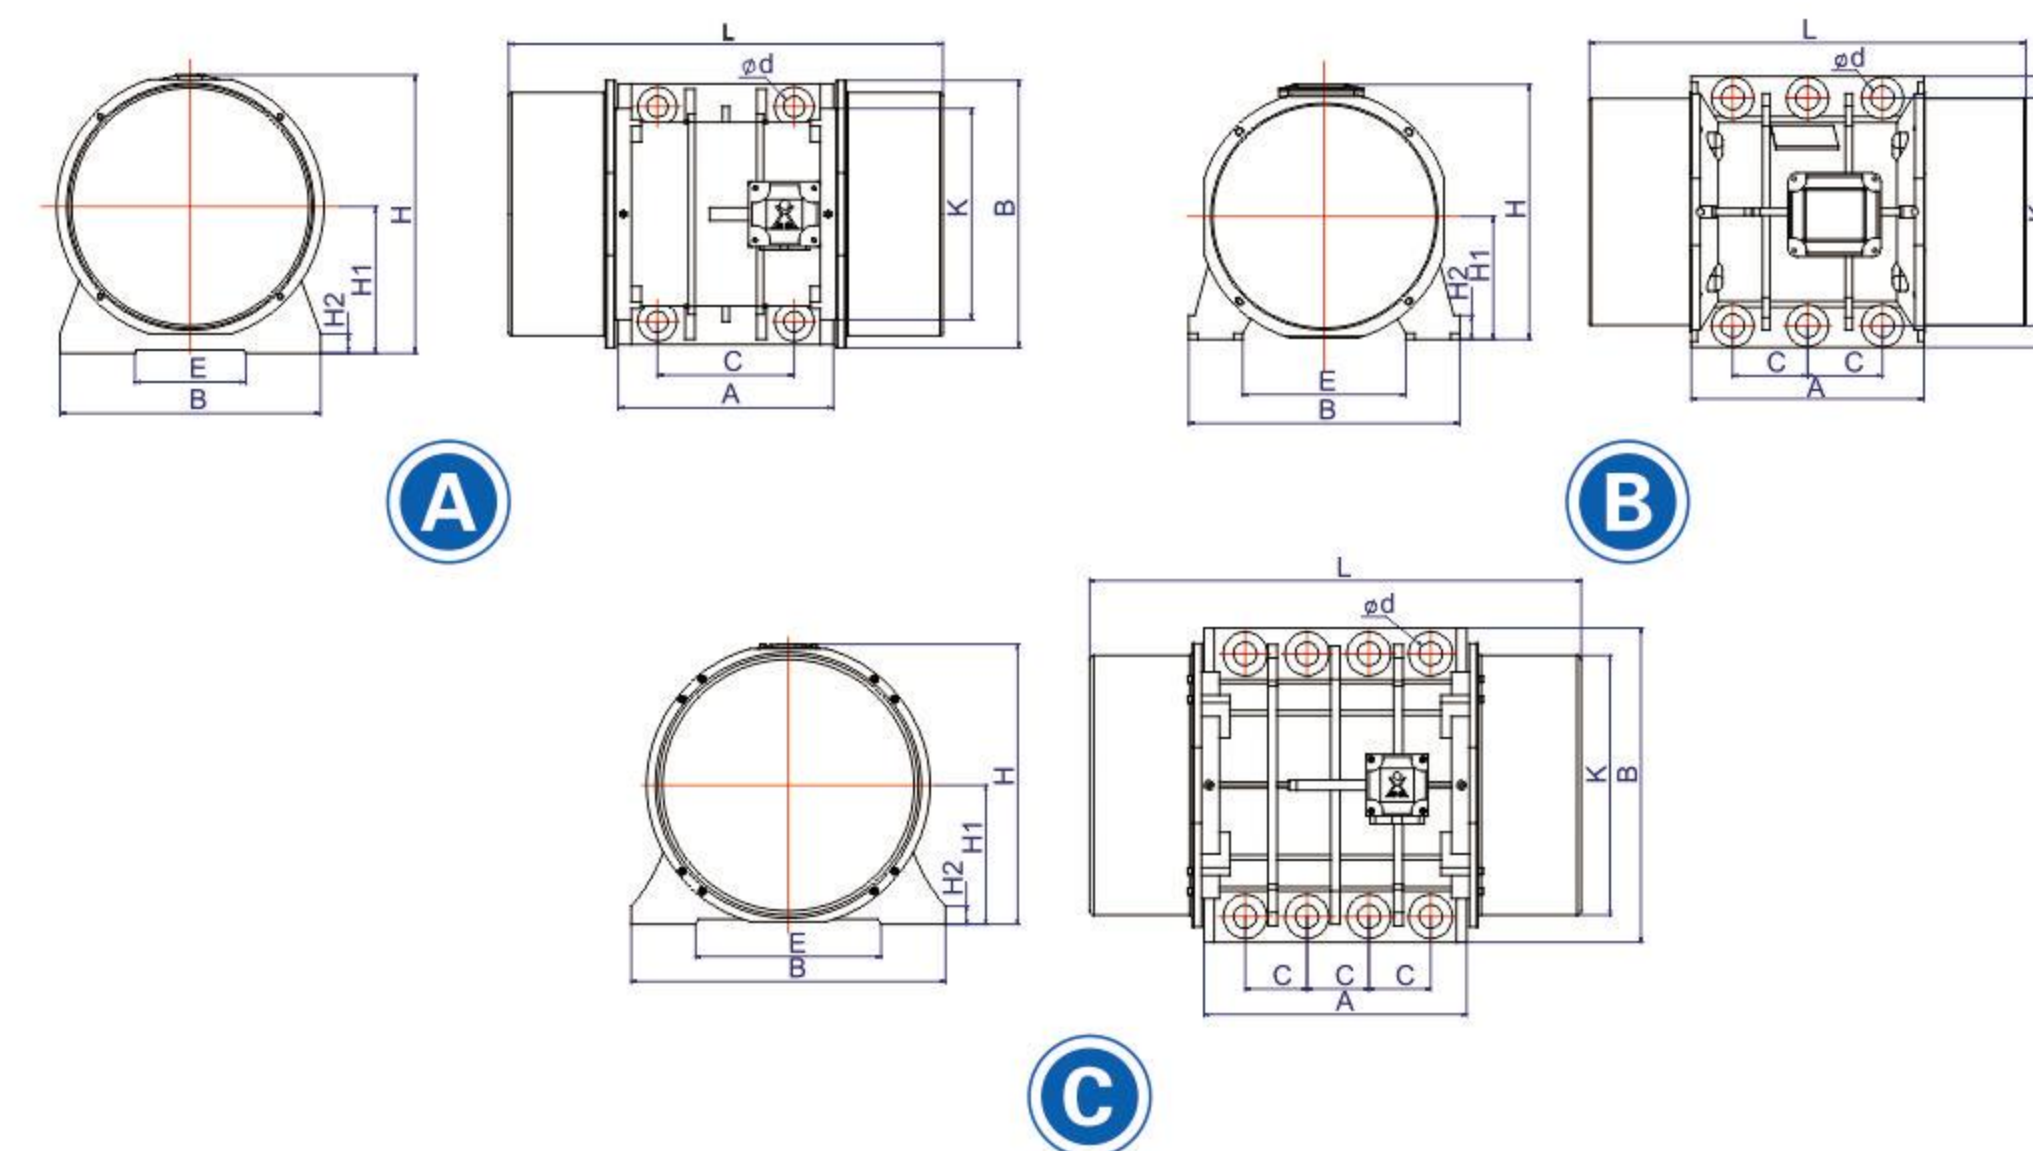

6 POLES-1000 rpm

序号	型号Type	安装尺寸(m m)			外形尺寸Dime ne ion(mm)							
		C	K	φd	L	A	B	E	H	H1	H2	图号
1	ZW-2.5-6	120	180	18	410	190	230	120	230	120	20	A
2	ZW-5-6	120	180	18	430	220	220	100	230	112.5	20	A
3	ZW-8-6	120	180	18	410	190	230	120	230	120	20	A
4	ZW-10-6	135	230	18	460	245	280	130	276	140	20	A
5	ZW-16-6	135	230	18	595	290	280	130	276	140	20	A
6	ZW-18-6	140	260	22	510	250	310	140	327	140	25	A
7	ZW-20-6	140	260	22	510	250	310	140	327	140	25	A
8	ZW-26-6	140	260	22	550	280	310	140	327	170	25	A
9	ZW-30-6	160	320	32	546	290	390	190	390	200	28	A
10	ZW-40-6	160	320	32	546	290	390	190	390	200	28	A
11	ZW-50-6	210	330	32	670	340	400	170	420	225	30	A
12	ZW-75-6	135	380	32	830	430	460	200	450	230	35	B
13	ZW-100-6	135	380	32	940	430	460	200	450	230	35	B
14	ZW-120-6	118	460	38	1010	520	550	340	520	260	38	C
15	ZW-130-6	118	460	38	1010	520	550	340	520	260	38	C
16	ZW-140-6	118	460	38	1040	520	550	340	520	260	38	C
17	ZW-150-6	118	460	38	1040	520	550	340	520	260	38	C
18	ZW-160-6	120	510	38	1080	520	610	360	548	270	40	C
19	ZW-180-6	120	510	38	1080	520	610	360	548	270	40	C
20	ZW-200-6	120	510	38	1120	520	610	360	548	270	40	C
21	ZW-260-6	140	540	45	1200	600	660	380	620	310	45	C
22	ZW-300-6	140	540	45	1250	600	660	380	620	310	45	C

HMVE系列振动电机技术参数

The teohnical and installation size of HMVE series vibrator motors



2 POLES-3000 rpm


序号	型号Type	激振力Force (KN)	功率Power (KW)	电流Current (A)	重量Weight (Kg)	机座号
1	HMVE-60-2	0.7	0.08	0.16	5.6	H64
2	HMVE-100-2	1	0.1	0.19	5.9	H64
3	HMVE-200-2	2	0.17	0.35	7	H64
4	HMVE-300-2	3	0.2	0.52	10.4	H79
5	HMVE-400-2	4	0.2	0.58	10.8	H79
6	HMVE-500-2	5	0.45	0.96	18.8	H94
7	HMVE-700-2	7	0.5	1.25	20	H94
8	HMVE-800-2	8	0.55	1.45	21.5	H94
9	HMVE-1200-2	12	0.75	1.85	22.5	H94
10	HMVE-1300-2	13	1.1	2.44	24.5	H94
11	HMVE-1600-2	16	1.25	2.94	51.6	H120
12	HMVE-1800-2	18	1.5	3.75	51.8	H120
13	HMVE-2000-2	20	2	4.07	52	H120
14	HMVE-2300-2	23	2	4.44	53.6	H120
15	HMVE-3200-2	32	2.2	5.3	96.9	H147
16	HMVE-4000-2	40	2.3	5.3	107	H147
17	HMVE-5000-2	50	3.5	7.22	115	H147
18	HMVE-6500-2	65	4.2	9.5	203.5	H203
19	HMVE-9000-2	90	7.2	17.8	215.6	H203
20	HMVE-12000-2	120	10	19	267.8	H205
21	HMVE-15000-2	150	15	27.5	325	H205

4 POLES-1500 rpm

序号	型号Type	激振力Force (KN)	功率Power (KW)	电流Current (A)	重量Weight (Kg)	机座号
1	HMVE-40-4	0.4	0.03	0.26	5.9	H48
2	HMVE-80-4	0.8	0.04	0.31	7.4	H64
3	HMVE-200-4	2	0.06	0.49	11.8	H79
4	HMVE-400-4	4	0.3	0.84	23.5	H94
5	HMVE-500-4	5	0.37	1.06	24.2	H94
6	HMVE-700-4	7	0.55	1.32	27.4	H94
7	HMVE-800-4	8	0.6	1.36	28.3	H94
8	HMVE-1400-4	14	0.85	1.78	59.8	H120
9	HMVE-1700-4	17	1.1	2.09	68.8	H120
10	HMVE-2400-4	24	1.5	3.2	72	H120
11	HMVE-3000-4	30	1.5	3.68	125	H147
12	HMVE-3800-4	38	1.72	4.15	130.4	H147
13	HMVE-4300-4	43	1.94	4.5	125	H147
14	HMVE-5500-4	55	2.2	6.5	158	H168
15	HMVE-7200-4	72	3	8.5	231.5	H203
16	HMVE-9000-4	90	5.8	13.5	245	H203
17	HMVE-10000-4	100	6.3	14.5	325	H205

HMVE系列振动电机安装尺寸

The teohnical and installation size of HMVE series vibrator motors

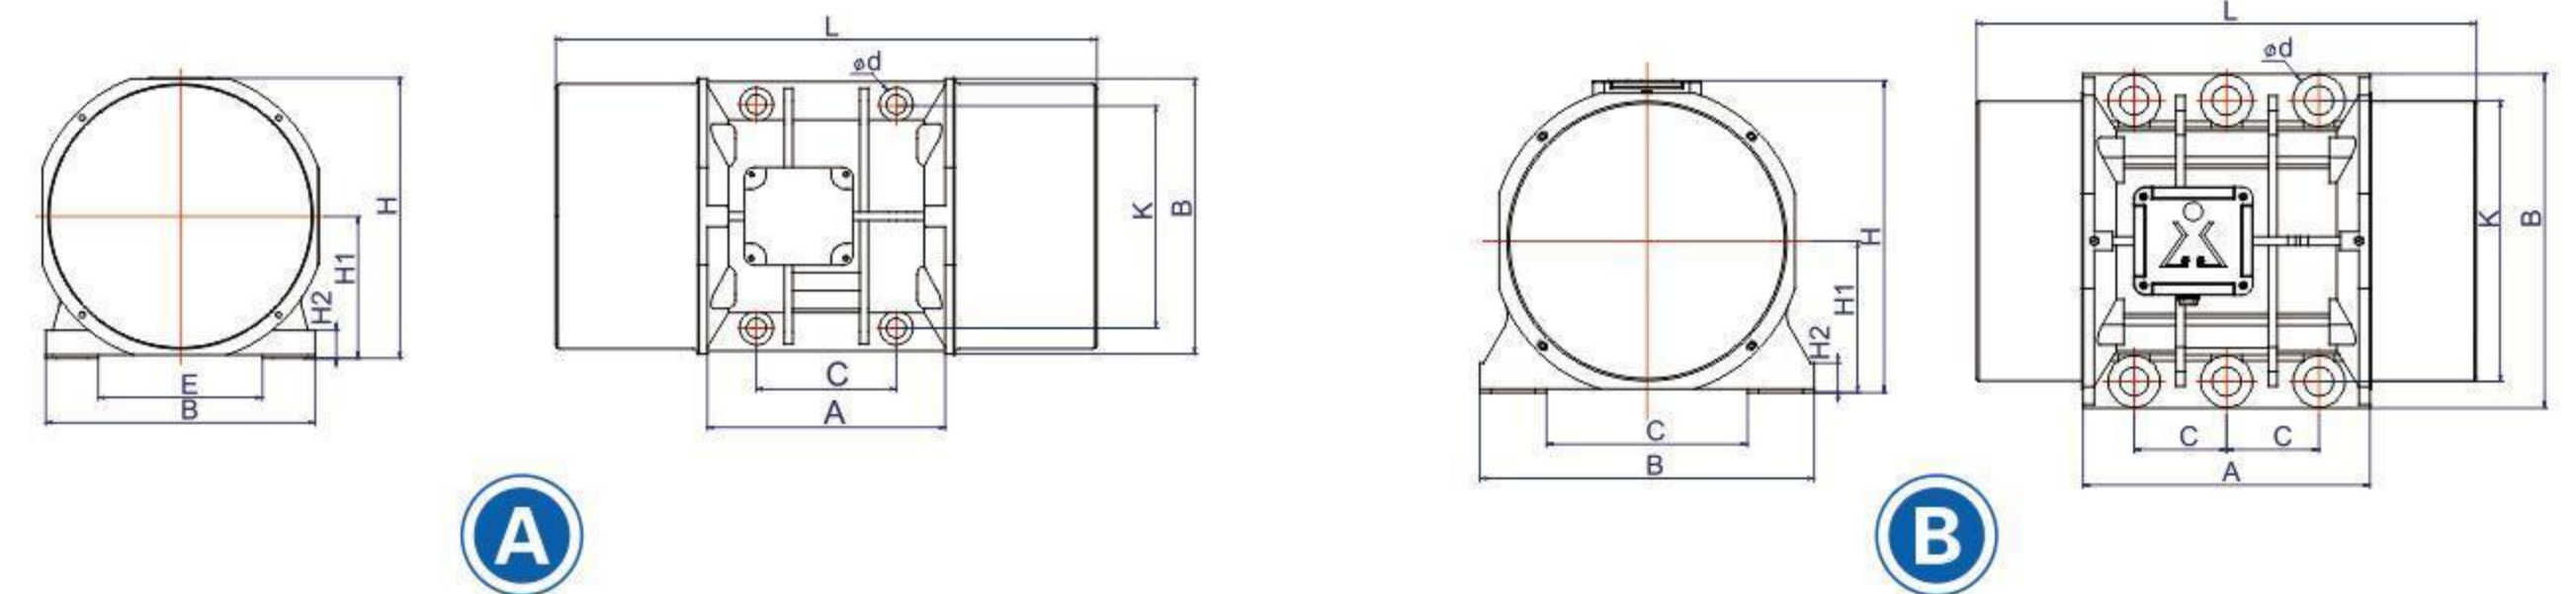

2 POLES-3000 rpm


序号	型号Type	安装尺寸(mm)			外形尺寸Dime ne ion(mm)							
		C	K	φ d	L	A	B	E	H	H1	H2	图号
1	HMVE-60-2	62-74	106	9	231	123	131	60	159	64	15	A
2	HMVE-100-2	62-74	106	9	231	123	131	60	159	64	15	A
3	HMVE-200-2	62-74	106	9	231	123	131	60	159	64	15	A
4	HMVE-300-2	90	125	13	273	163	155	60	175	79	15	A
5	HMVE-400-2	90	125	13	273	163	155	60	175	79	15	A
6	HMVE-500-2	120	170	17	362	205	208	108	210	94	22	A
7	HMVE-700-2	120	170	17	362	205	208	108	210	94	22	A
8	HMVE-800-2	120	170	17	362	205	208	108	210	94	22	A
9	HMVE-1200-2	120	170	17	362	205	208	108	210	94	22	A
10	HMVE-1300-2	120	170	17	362	205	208	108	210	94	22	A
11	HMVE-1600-2	140	190	17	421	225	229	119	262	120	30	A
12	HMVE-1800-2	140	190	17	421	225	229	119	262	120	30	A
13	HMVE-2000-2	140	190	17	421	225	229	119	262	120	30	A
14	HMVE-2300-2	140	190	17	421	225	229	119	262	120	30	A
15	HMVE-3200-2	155	255	25	553	288	302	172	318	147	35	A
16	HMVE-4000-2	155	255	25	553	288	302	172	318	147	35	A
17	HMVE-5000-2	155	255	25	553	288	302	172	318	147	35	A
18	HMVE-6500-2	200	320	28	624	364	385	235	402	203	40	A
19	HMVE-9000-2	200	320	28	624	364	385	235	402	203	40	A
20	HMVE-12000-2	125	380	39	648	388	452	272	415	205	40	B
21	HMVE-15000-2	125	380	39	648	388	452	272	415	205	40	B

4 POLES-1500 rpm

序号	型号Type	安装尺寸(mm)			外形尺寸Dime ne ion(mm)							
		C	K	φ d	L	A	B	E	H	H1	H2	图号
1	HMVE-40-4	62-74	106	9	231	121	130	60	136	48	12	A
2	HMVE-80-4	62-74	106	9	231	123	131	60	159	64	15	A
3	HMVE-200-4	90	125	13	273	163	154	60	175	79	15	A
4	HMVE-400-4	120	170	17	362	205	208	60	210	94	22	A
5	HMVE-500-4	120	170	17	362	205	208	60	210	94	22	A
6	HMVE-700-4	120	170	17	362	205	208	60	210	94	22	A
7	HMVE-800-4	120	170	17	362	205	208	60	210	94	22	A
8	HMVE-1400-4	140	190	17	453	225	229	119	262	120	30	A
9	HMVE-1700-4	140	190	17	453	225	229	119	262	120	30	A
10	HMVE-2400-4	140	190	17	519	225	229	119	262	120	30	A
11	HMVE-3000-4	155	225	22	603	288	302	172	318	147	35	A
12	HMVE-3800-4	155	255	23.5	603	288	302	172	318	147	35	A
13	HMVE-4300-4	155	255	23.5	603	288	302	172	318	147	35	A
14	HMVE-5500-4	180	280	26	603	304	332	192	360	168	37	A
15	HMVE-7200-4	200	320	28	624	364	385	235	402	203	40	A
16	HMVE-9000-4	200	320	28	624	364	385	235	402	203	40	A
17	HMVE-10000-4	125	380	39	728	388	482	272	415	205	40	B

HMVE系列振动电机技术参数

The teohnical and installation size of HMVE series vibrator motors

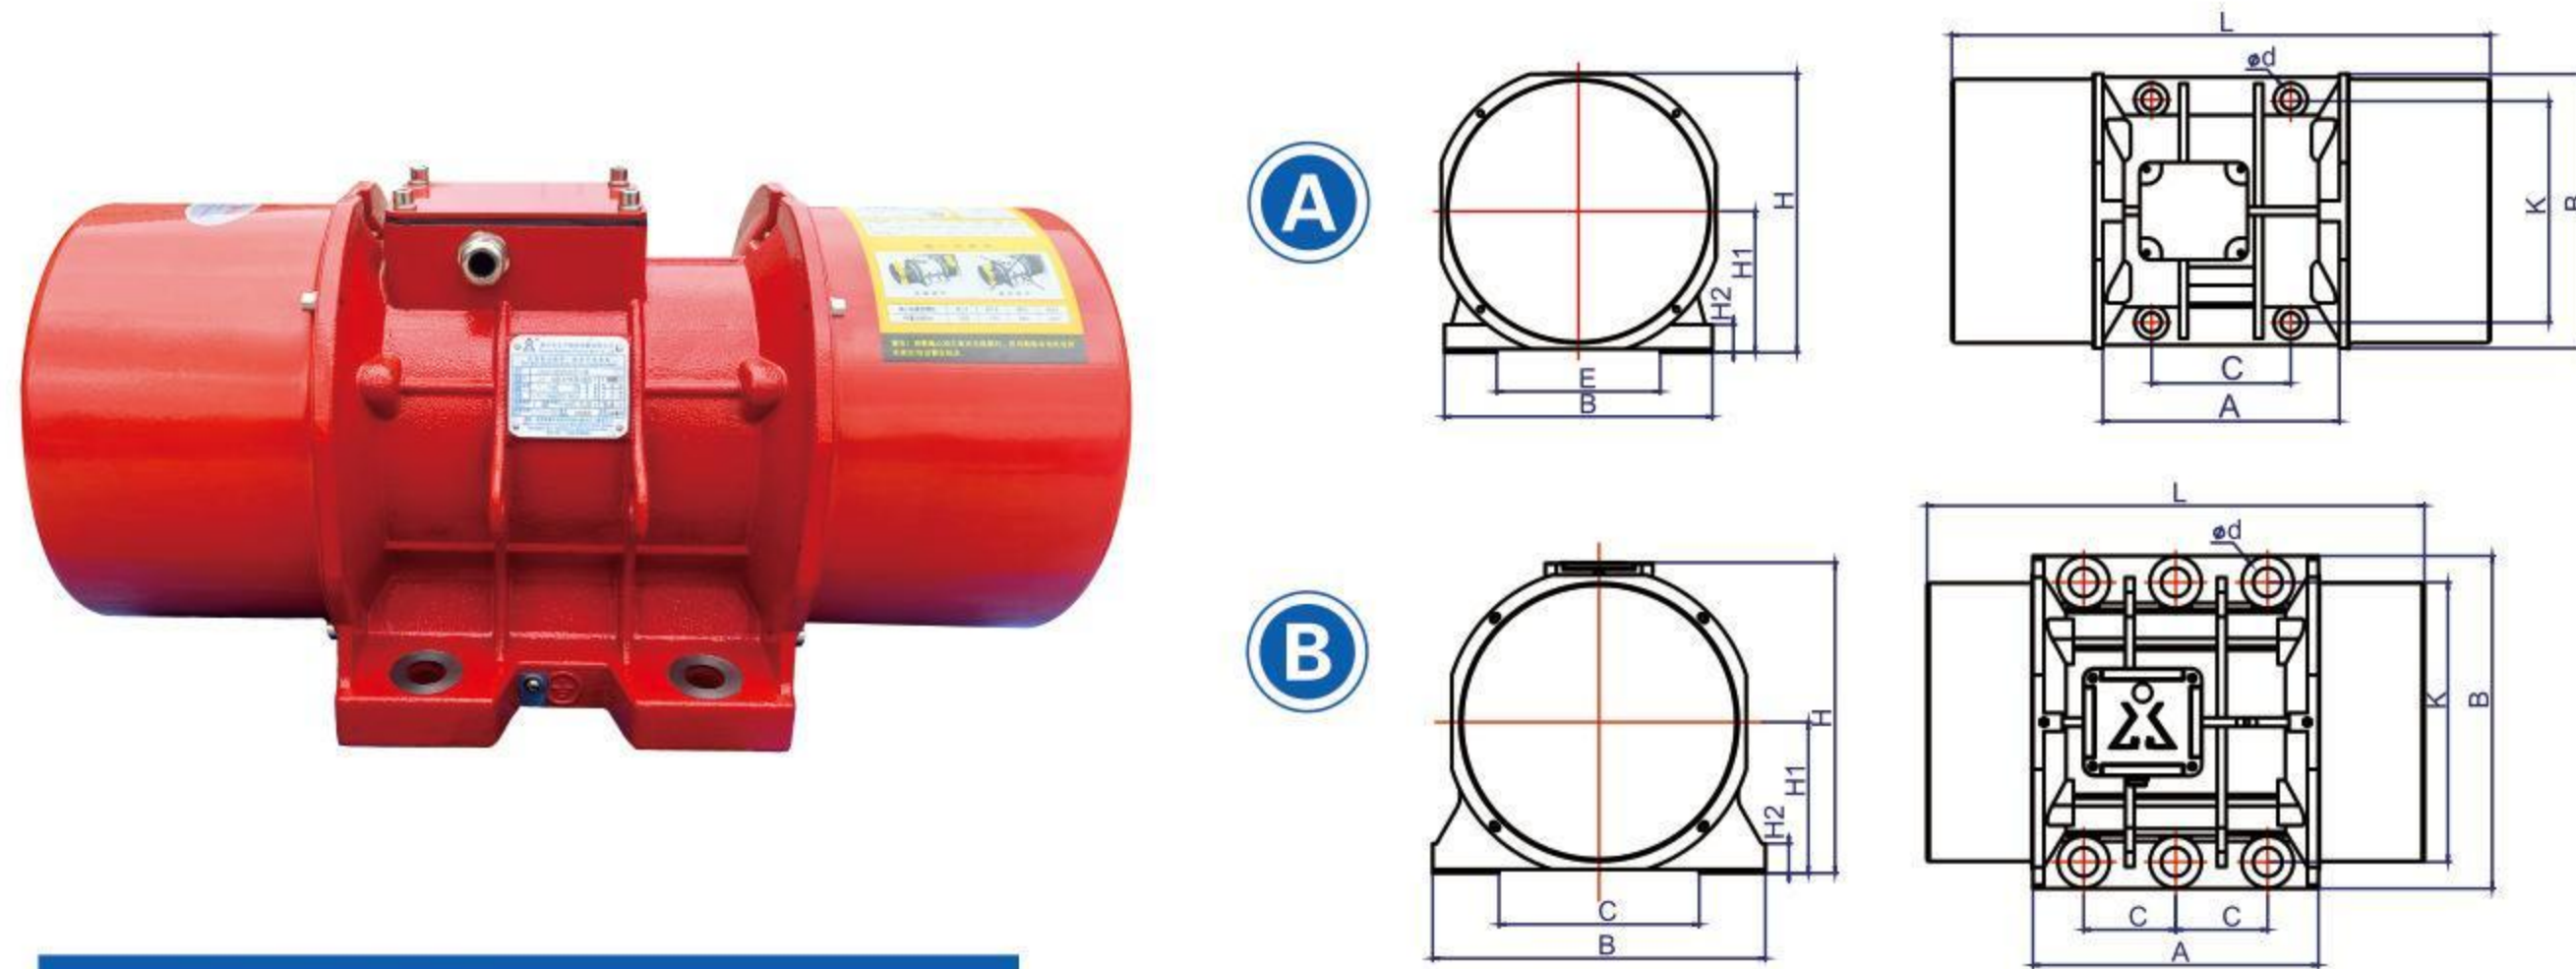


6 POLES-1000 rpm

序号	型号 Type	激振力 Force (KN)	功率 Power (KW)	电流 Current (A)	重量 Weight (Kg)	机座号
1	HMVE-50-6	0.5	0.03	0.38	10.4	H79
2	HMVE-200-6	1.8	0.05	0.48	19.6	H94
3	HMVE-300-6	3	0.16	0.67	26.6	H94
4	HMVE-400-6	4	0.25	0.78	30.5	H94
5	HMVE-500-6	5	0.37	1.22	34	H94
6	HMVE-800-6	7.8	0.45	1.26	61.8	H120
7	HMVE-1100-6	11	0.55	1.42	79.4	H120
8	HMVE-1400-6	14	0.7	1.95	81.7	H120
9	HMVE-1500-6	15	0.7	2	83.6	H120
10	HMVE-1600-6	16	0.75	2.06	82	H120
11	HMVE-2100-6	21	1.1	2.96	110	H140
12	HMVE-2600-6	26	1.5	3.79	130	H147
13	HMVE-3000-6	30	1.7	4.15	145	H147
14	HMVE-3800-6	38	2	4.91	188	H170
15	HMVE-4700-6	47	2.35	5.5	215	H170
16	HMVE-5200-6	52	2.6	6.86	268	H203
17	HMVE-6500-6	65	2.9	7.62	305	H203
18	HMVE-8000-6	80	4.5	9.95	315.9	H203
19	HMVE-9000-6	90	5	11.08	330	H203
20	HMVE-10000-6	100	6.2	12.55	412	H205
21	HMVE-13000-6	130	7	14.25	458	H205
22	HMVE-15000-6	150	9	18.18	686.6	H268
23	HMVE-17500-6	175	11	22.34	744	H268
24	HMVE-19500-6	195	12	24.59	768	H268
25	HMVE-22000-6	220	16	30.65	916	H297
26	HMVE-25000-6	250	16	31.34	994	H297
27	HMVE-30000-6	300	23	44.51	1235	H320
28	HMVE-40000-6	400	30	57.5	1760	H350

HMVE系列振动电机安装尺寸

The teohnical and installation size of HMVE series vibrator motors

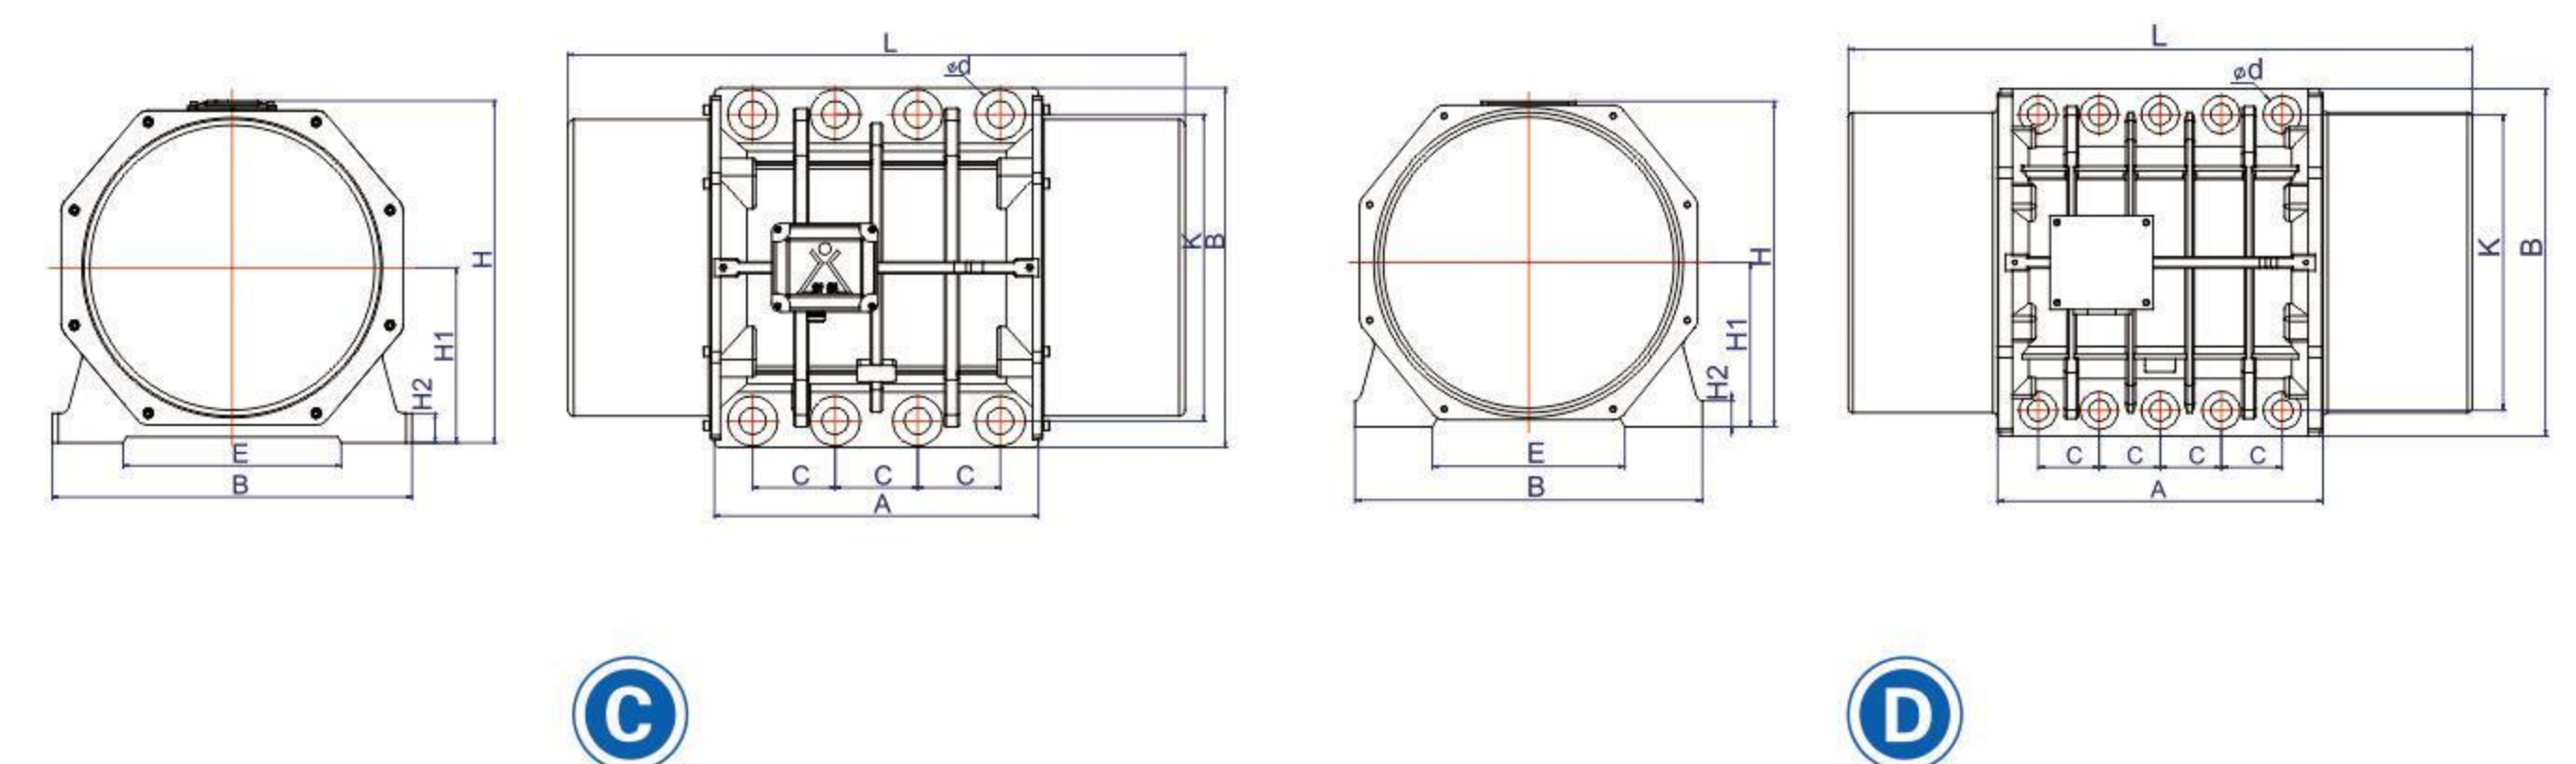

6 POLES-1000 rpm

序号	型号 Type	安装尺寸 (mm)			外形尺寸 Dimension (mm)							
		C	K	ϕd	L	A	B	E	H	H1	H2	图号
1	HMVE-50-6	90	125	13	273	163	154	60	175	79	15	A
2	HMVE-200-6	120	170	17	362	205	208	108	210	94	22	A
3	HMVE-300-6	120	170	17	362	205	208	108	210	94	22	A
4	HMVE-400-6	120	170	17	451	205	208	108	210	94	22	A
5	HMVE-500-6	120	170	17	451	205	208	108	210	94	22	A
6	HMVE-800-6	120	170	17	453	225	229	119	262	120	30	A
7	HMVE-1100-6	140	190	17	519	225	229	119	262	120	30	A
8	HMVE-1400-6	140	190	17	567	225	229	119	262	120	30	A
9	HMVE-1500-6	140	190	17	567	225	229	119	262	120	30	A
10	HMVE-1600-6	140	190	17	567	225	229	119	262	120	30	A
11	HMVE-2100-6	155	225	22	623	255	275	155	290	140	30	A
12	HMVE-2600-6	155	255	23.5	692	282	304	174	314	147	30	A
13	HMVE-3000-6	155	255	23.5	692	282	304	174	314	147	30	A
14	HMVE-3800-6	180	280	26	683	317	332	192	354	170	35	A
15	HMVE-4700-6	180	280	26	733	317	332	192	354	170	35	A
16	HMVE-5200-6	200	320	28	704	364	385	235	402	203	40	A
17	HMVE-6500-6	200	320	28	704	364	385	235	402	203	40	A
18	HMVE-8000-6	200	320	28	774	364	385	235	402	203	40	A
19	HMVE-9000-6	200	320	28	774	364	385	235	402	203	40	A
20	HMVE-10000-6	125	380	39	908	388	452	272	415	205	40	B
21	HMVE-13000-6	125	380	39	948	388	452	272	415	205	40	B
22	HMVE-15000-6	140	480	45	980	560	570	330	542	268	48	C
23	HMVE-17500-6	140	480	45	1060	560	570	330	542	268	48	C
24	HMVE-19500-6	140	480	45	1060	560	570	330	542	268	48	C
25	HMVE-22000-6	140	520	45	1130	560	610	360	594	297	42	C
26	HMVE-25000-6	140	520	45	1130	560	610	360	594	297	42	C
27	HMVE-30000-6	140	600	45	1167	585	700	400	636	320	45	C
28	HMVE-40000-6	130	630	45	1278	690	740	420	704	320	55	D

HMVEL系列振动电机技术参数

The teohnical and installation size of HMVEL series vibrator motors

图1 侧板振动电机外形安装图
(80AX A)

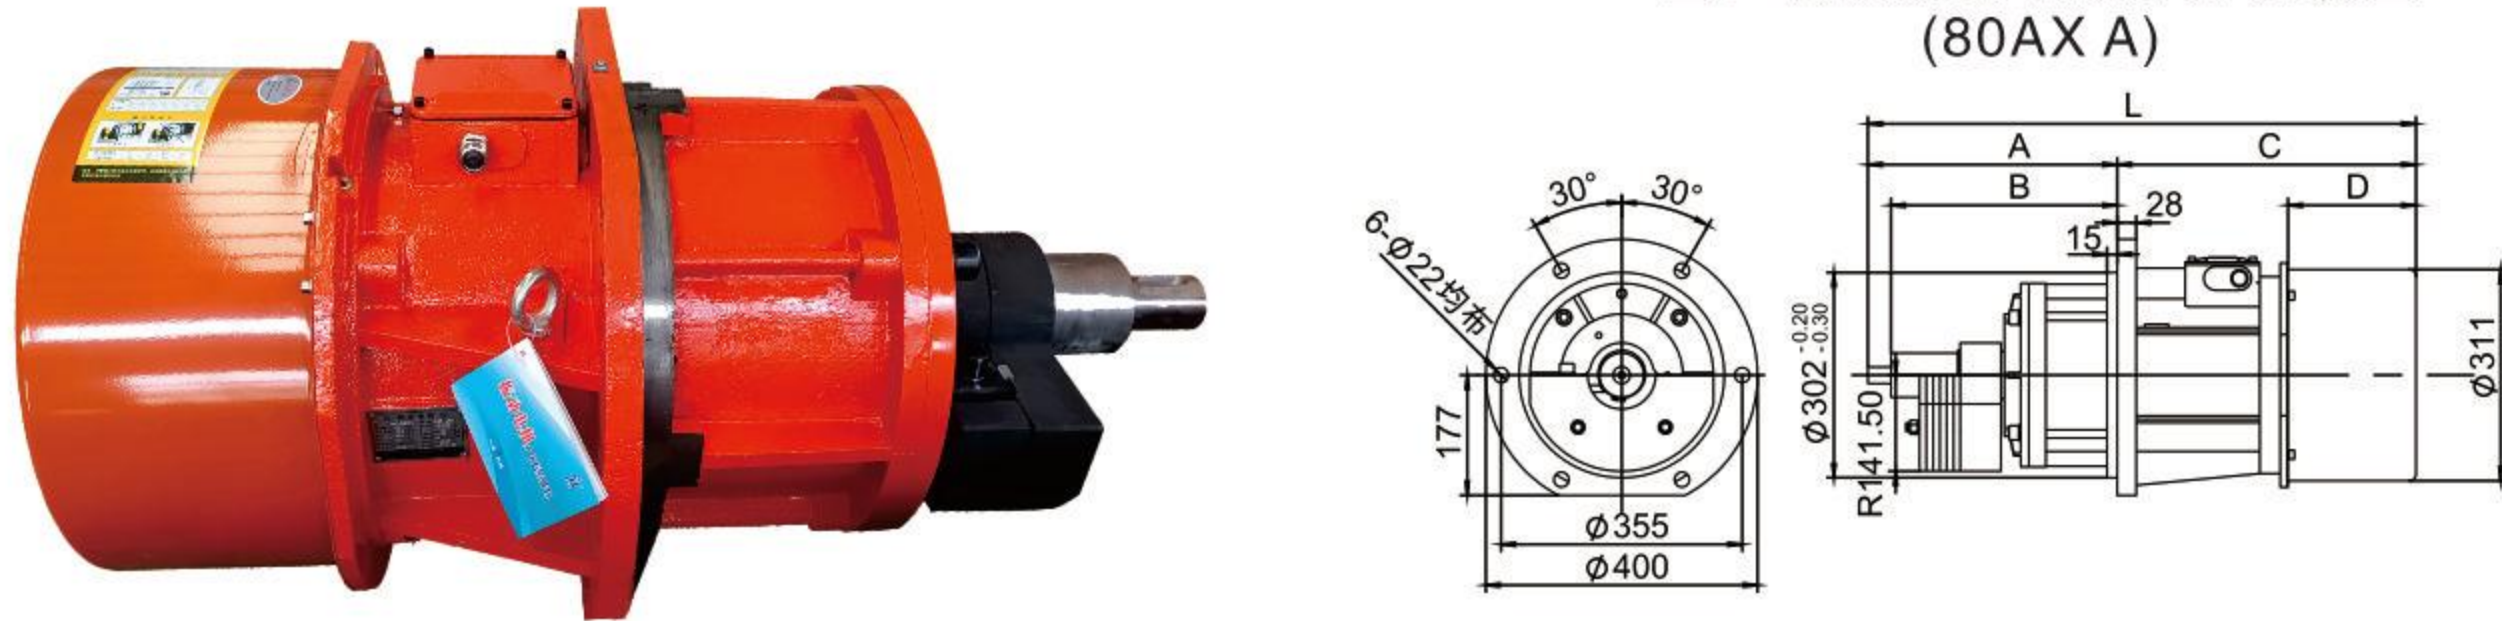


图2 侧板振动电机外形安装图
(SIZE85BE B)

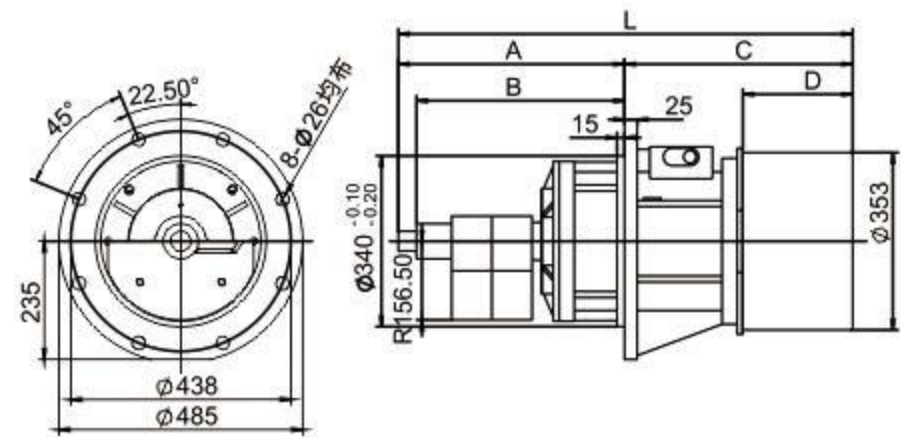


图3 侧板振动电机外形安装图
(SIZE90 91 A)


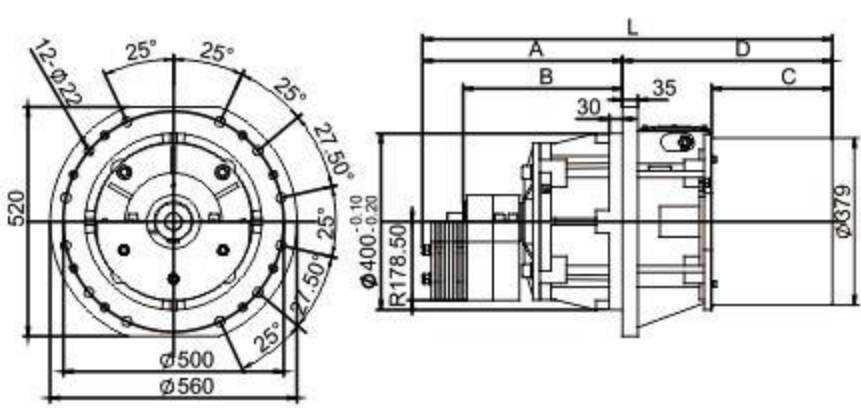


图4 侧板振动电机外形安装图
(SIZE90 91 B)

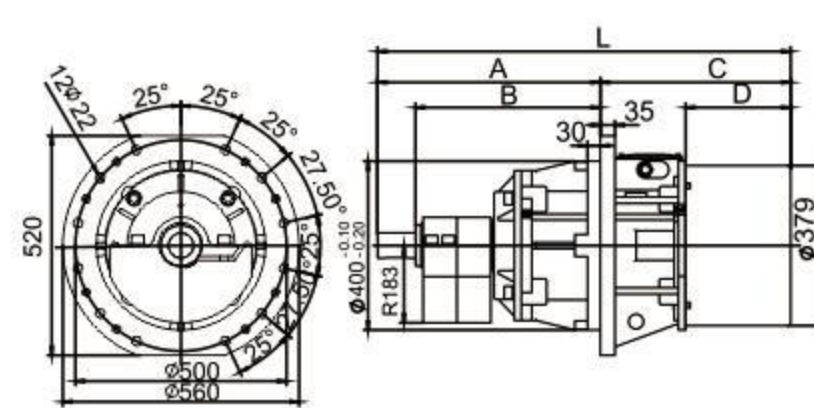

HMVEL系列振动电机安装参数

The teohnical and installation size of HMVEL series vibrator motors

图5 侧板振动电机外形安装图 (SIZE105 B)

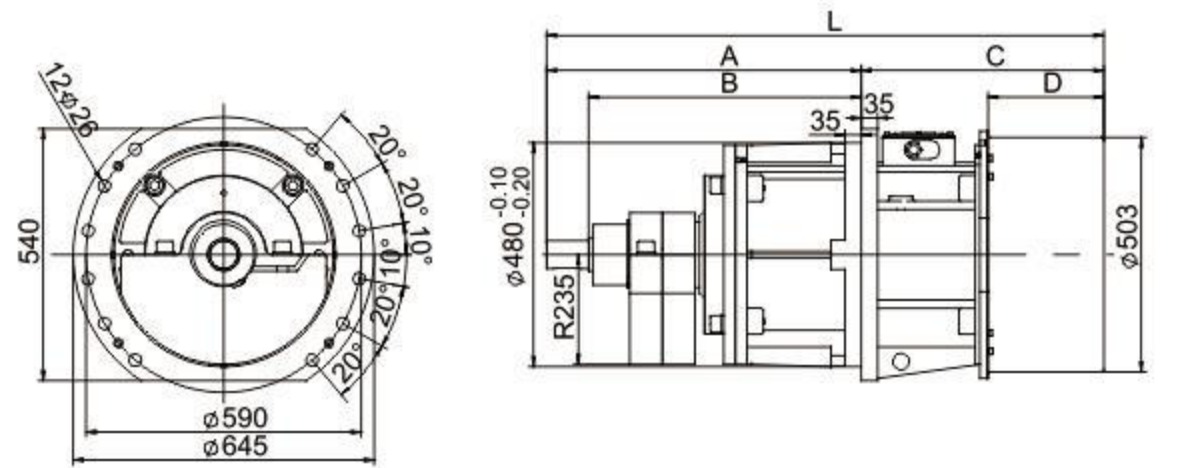


图6 侧板振动电机外形安装图 (SIZE105 A)


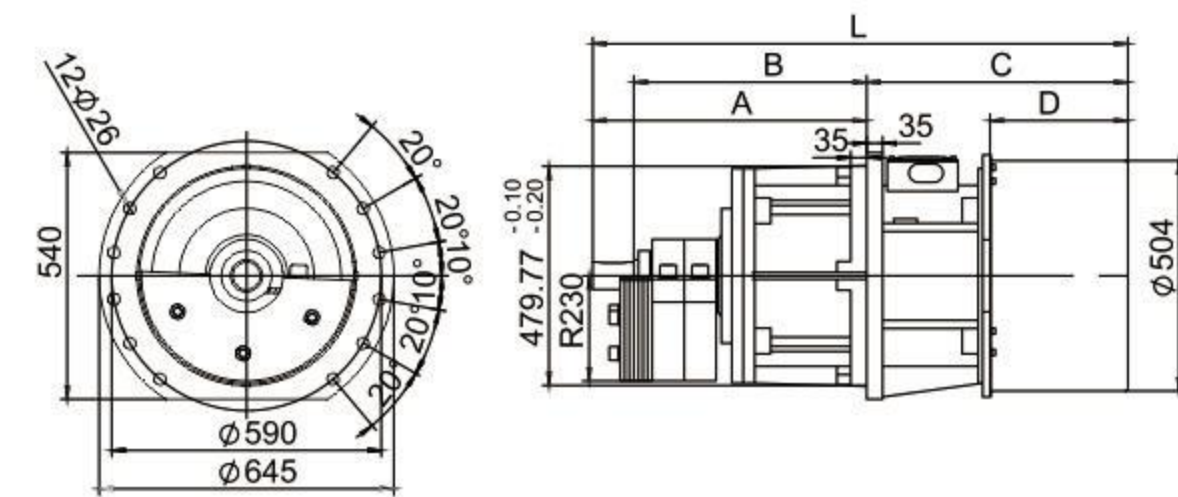


图7 侧板振动电机外形安装图 (SIZE110 B)

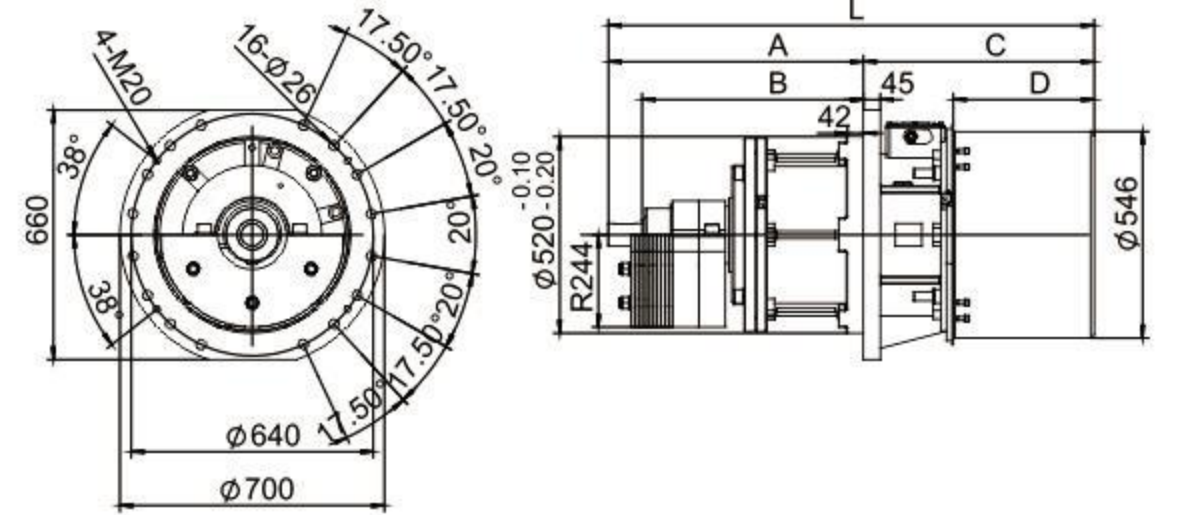

6 POLES-1000 rpm

型号Type	转速RPM	激振力Force (KN)	功率Power (KW)	电流Current A (Δ/Y)	重量Weight (Kg)	电缆接头 Cable Gland
HMVEL-3700-6	1000	37	3.06	13.1/7.6	185	M24*1.5
HMVEL-4500-6	1000	45	3.06	13.1/7.6	204	M24*1.5
HMVEL-5000-6	1000	50	4.35	18.3/10.6	240	M24*1.5
HMVEL-5500-6	1000	55	4.35	18.3/10.6	245	M24*1.5
HMVEL-6500-6	1000	65	4.5	17.2/9.96	270	M24*1.5
HMVEL-8500-6	1000	85	5.1	20/11.5	330	M27*1.5
HMVEL-9000-6	1000	90	5.1	20/11.5	335	M27*1.5
HMVEL-10000-6	1000	100	5.5	20/11.5	424	M27*1.5
HMVEL-13000-6	1000	130	7	19.8/11.4	476	M27*1.5
HMVEL-15000-6	1000	150	11	38.1/22	670	M27*1.5
HMVEL-17500-6	1000	175	11	38.9/22.5	696	M27*1.5
HMVEL-19500-6	1000	195	12	40.7/23.5	735	M27*1.5
HMVEL-22000-6	1000	220	16	34.8/20.1	895	M27*1.5
HMVEL-25000-6	1000	250	16	34.8/20.1	980	M27*1.5

8 POLES-750 rpm

型号Type	转速RPM	激振力Force (KN)	功率Power (KW)	电流Current A (Δ/Y)	重量Weight (Kg)	电缆接头 Cable Gland
HMVEL-10000-8	750	100	7.4	36.9/21.2	530	M27*1.5
HMVEL-13500-8	750	135	8.4	34.6/20	748	M27*1.5
HMVEL-14000-8	750	140	8.4	34.6/20	760	M27*1.5
HMVEL-16000-8	750	160	11	23.6/13.66	862	M27*1.5
HMVEL-17000-8	750	170	11	23.6/13.66	880	M27*1.5
HMVEL-18000-8	750	180	11	23.6/13.66	901	M27*1.5
HMVEL-20000-8	750	200	11	52/30	930	M27*1.5
HMVEL-22000-8	750	220	11	52/30	975	M27*1.5
HMVEL-23000-8	750	230	17	36.3/21.2	1035	M27*1.5

6 POLES-1000 rpm

型号Type	A	B	C	D	L	安装螺钉	轴端类型	图号
HMVEL-3700-6	367	333	440	190	807	M20	a	图1
HMVEL-4500-6	392	358	495	245	887	M20	a	图1
HMVEL-5000-6	449	415	460	210	909	M20	a	图1
HMVEL-5500-6	449	415	480	230	929	M20	a	图1
HMVEL-6500-6	450	414	454	220	904	M24	b	图2
HMVEL-8500-6	471.5	381.5	406	205	877.5	M20	b	图3/4
HMVEL-9000-6	471.5	381.5	406	205	877.5	M20	b	图3/4
HMVEL-10000-6	527.5	437.5	451	250	978.5	M20	c	图3/4
HMVEL-13000-6	567.5	477.5	491	290	1058.5	M20	c	图3/4
HMVEL-15000-6	675	585	520	250	1195	M24	c	图5/6
HMVEL-17500-6	675	585	520	250	1195	M24	c	图5/6
HMVEL-19500-6	675	585	520	248	1195	M24	c	图5/6
HMVEL-22000-6	675	585	565	250	1240	M24	c	图7
HMVEL-25000-6	675	585	575	260	1250	M24	c	图7

8 POLES-750 rpm

型号Type	A	B	C	D	L	安装螺钉	轴端类型	图号
HMVEL-10000-8	609.5	519.5	566	365	1175.5	M20	b	图3/4
HMVEL-13500-8	599.5	509.5	546	276	1145.5	M24	c	图5/6
HMVEL-14000-8	599.5	509.5	556	286	1155.5	M24	c	图5/6
HMVEL-16000-8	599.5	509.5	572	302	1171.5	M24	c	图5/6
HMVEL-17000-8	675	585	617	347	1292	M24	c	图5/6
HMVEL-18000-8	675	585	617	347	1292	M24	c	图5/6
HMVEL-20000-8	675	585	661	346	1336	M24	c	图7
HMVEL-22000-8	675	585	691	376	1366	M24	c	图7
HMVEL-23000-8	675	585	701	386	1376	M24	c	图7

HZW系列 振动电机技术参数

The teohnical and installation size of HZW series vibrator motors



2 POLES-3000 rpm


序号	型号 Type	激振力 Force (KN)	功率 Power (KW)	电流 Current (A)	重量 Weight (Kg)	机座号
1	HZW-1.5-2	1.5	0.15	0.4	15	85
2	HZW-2.5-2	2.5	0.25	0.58	18	85
3	HZW-5-2	5	0.4	1.02	33	100
4	HZW-8-2	8	0.75	1.76	61	120
5	HZW-16-2	16	1.5	3.7	95	170

4 POLES-1500 rpm

序号	型号 Type	激振力 Force (KN)	功率 Power (KW)	电流 Current (A)	重量 Weight (Kg)	机座号
1	HZW-1.2-4	1.2	0.1	0.34	16	85
2	HZW-2.5-4	2.5	0.1	0.34	24	85
3	HZW-5-4	5	0.25	0.65	40	120
4	HZW-8-4	8	0.4	1.16	55	120
5	HZW-16-4	16	0.75	1.91	80	140
6	HZW-20-4	20	1.1	2.81	105	140
7	HZW-25-4	25	1.5	3.84	110	170
8	HZW-32-4	32	2	4.69	165	170
9	HZW-50-4	50	2.5	6.3	253	225
10	HZW-75-4	75	4	10.18	298	225
11	HZW-100-4	100	6	15.8	420	230
12	HZW-120-4	120	8	19.6	480	260
13	HZW-140-4	140	9	22	520	260

HZW系列 振动电机安装尺寸

The teohnical and installation size of HZW series vibrator motors

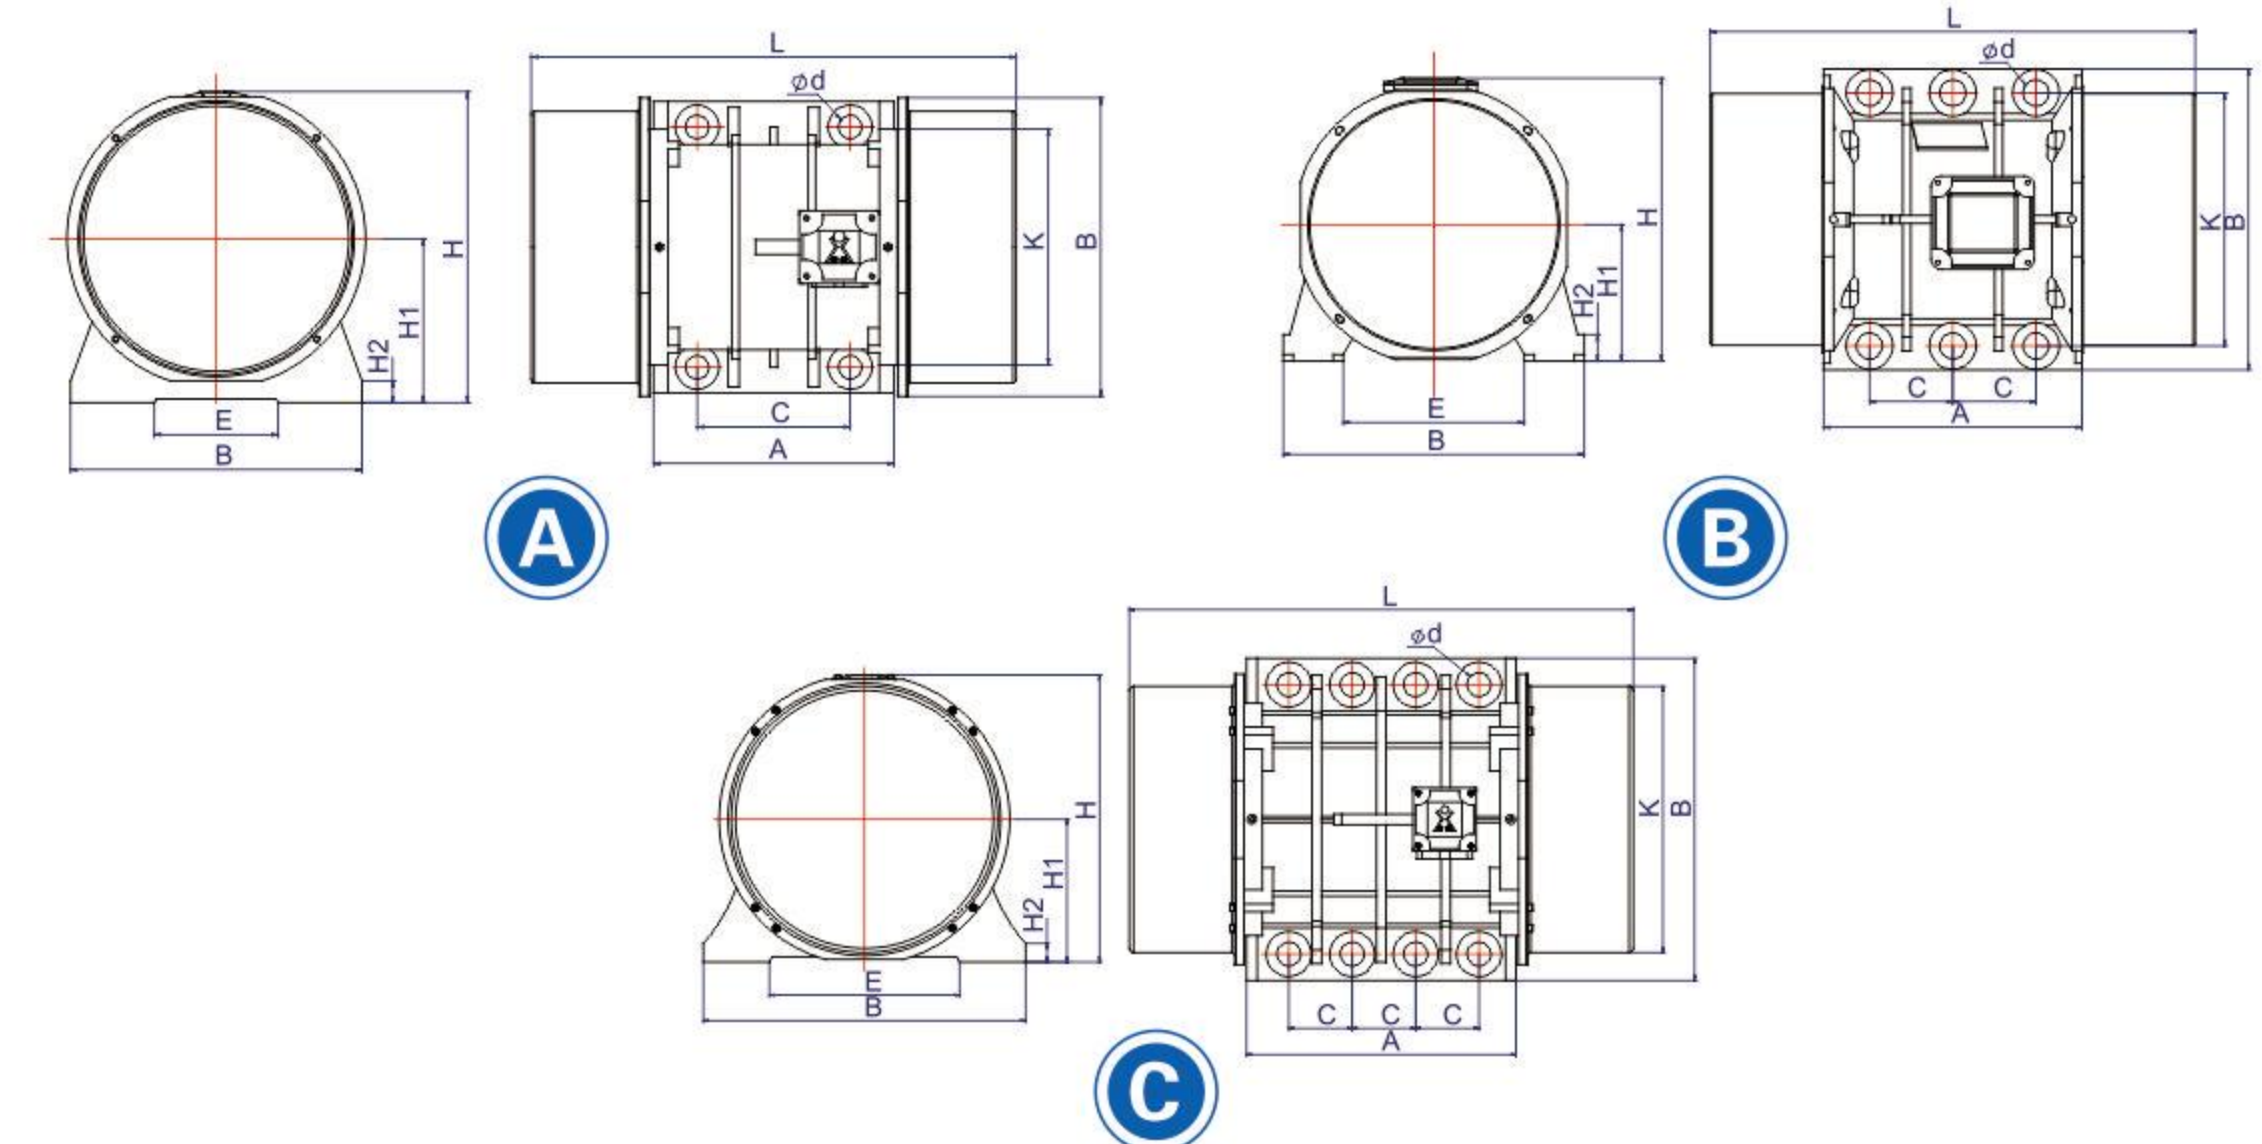

2 POLES-3000 rpm


序号	型号 Type	安装尺寸 (mm)			外形尺寸 Dimeneion(mm)							
		C	K	ϕd	L	A	B	E	H	H1	H2	图号
1	HZW-1.5-2	100	150	13	308	150	180	70	192	85	20	A
2	HZW-2.5-2	100	150	13	310	150	180	70	192	85	20	A
3	HZW-5-2	120	150	18	390	200	200	60	202	100	16	A
4	HZW-8-2	120	180	18	410	190	230	120	230	120	20	A
5	HZW-16-2	140	260	22	530	280	310	140	327	170	25	A

4 POLES-1500 rpm

序号	型号 Type	安装尺寸 (mm)			外形尺寸 Dimeneion(mm)							
		C	K	ϕd	L	A	B	E	H	H1	H2	图号
1	HZW-1.2-4	100	150	13	310	150	180	70	192	85	20	A
2	HZW-2.5-4	100	150	13	330	150	180	70	192	85	20	A
3	HZW-5-4	120	180	18	410	190	230	120	230	120	20	A
4	HZW-8-4	120	180	18	410	190	230	120	230	120	20	A
5	HZW-16-4	135	230	18	460	245	280	130	276	140	20	A
6	HZW-20-4	140	260	22	510	250	310	140	327	140	25	A
7	HZW-25-4	140	260	22	530	280	310	140	327	170	25	A
8	HZW-32-4	140	260	22	530	280	310	140	327	170	25	A
9	HZW-50-4	210	330	32	670	340	400	170	420	225	30	A
10	HZW-75-4	210	330	32	670	340	400	170	420	225	30	A
11	HZW-100-4	135	380	32	940	430	460	200	450	230	35	B
12	HZW-120-4	118	460	38	1010	520	550	340	520	260	38	B
13	HZW-140-4	118	460	38	1010	520	550	340	520	260	38	C

HZW系列 振动电机技术参数

The teohnical and installation size of HZW series vibrator motors

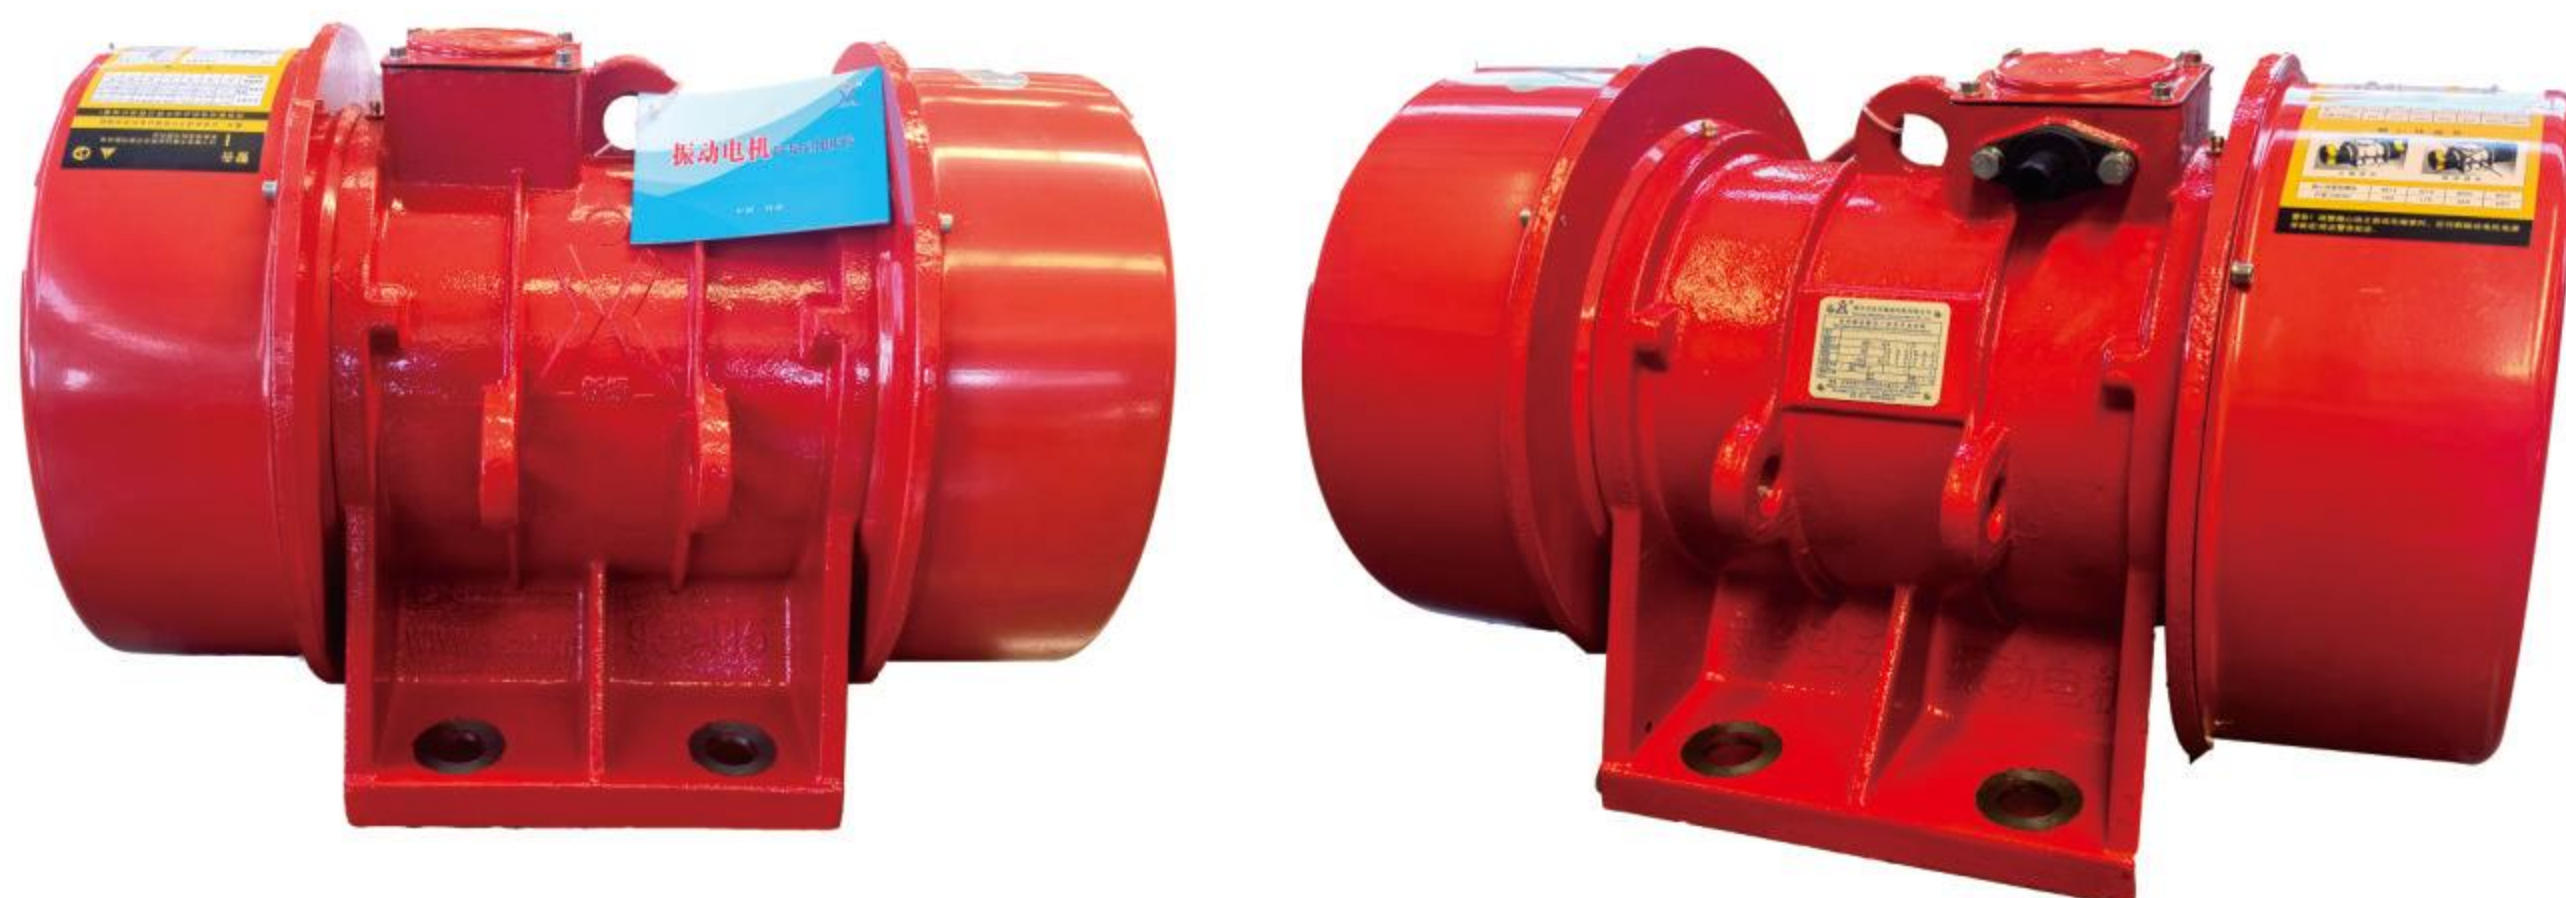


6 POLES-1000 rpm

序号	型号 Type	激振力 Force (KN)	功率 Power (KW)	电流 Current (A)	重量 Weight (Kg)	机座号
1	HZW-2.5-6	2.5	0.2	0.71	43	120
2	HZW-5-6	5	0.4	1.23	50	120
3	HZW-10-6	10	0.75	2.3	82	140
4	HZW-16-6	16	1.1	3.35	100	140
5	HZW-20-6	20	1.5	3.8	115	140
6	HZW-26-6	26	1.9	4.8	130	170
7	HZW-30-6	30	2.2	5.52	146	170
8	HZW-40-6	40	3	7.7	175	200
9	HZW-50-6	50	3.7	9.8	235	200
10	HZW-75-6	75	5.5	13.3	278	225
11	HZW-100-6	100	7.5	18	402	230
12	HZW-120-6	120	8.5	19.7	471	230
13	HZW-140-6	140	9.5	21.7	700	260
14	HZW-160-6	160	12	28.5	760	260
15	HZW-180-6	180	14	32	800	270
16	HZW-200-6	200	16	36	890	270

HZW系列 振动电机安装尺寸

The teohnical and installation size of HZW series vibrator motors

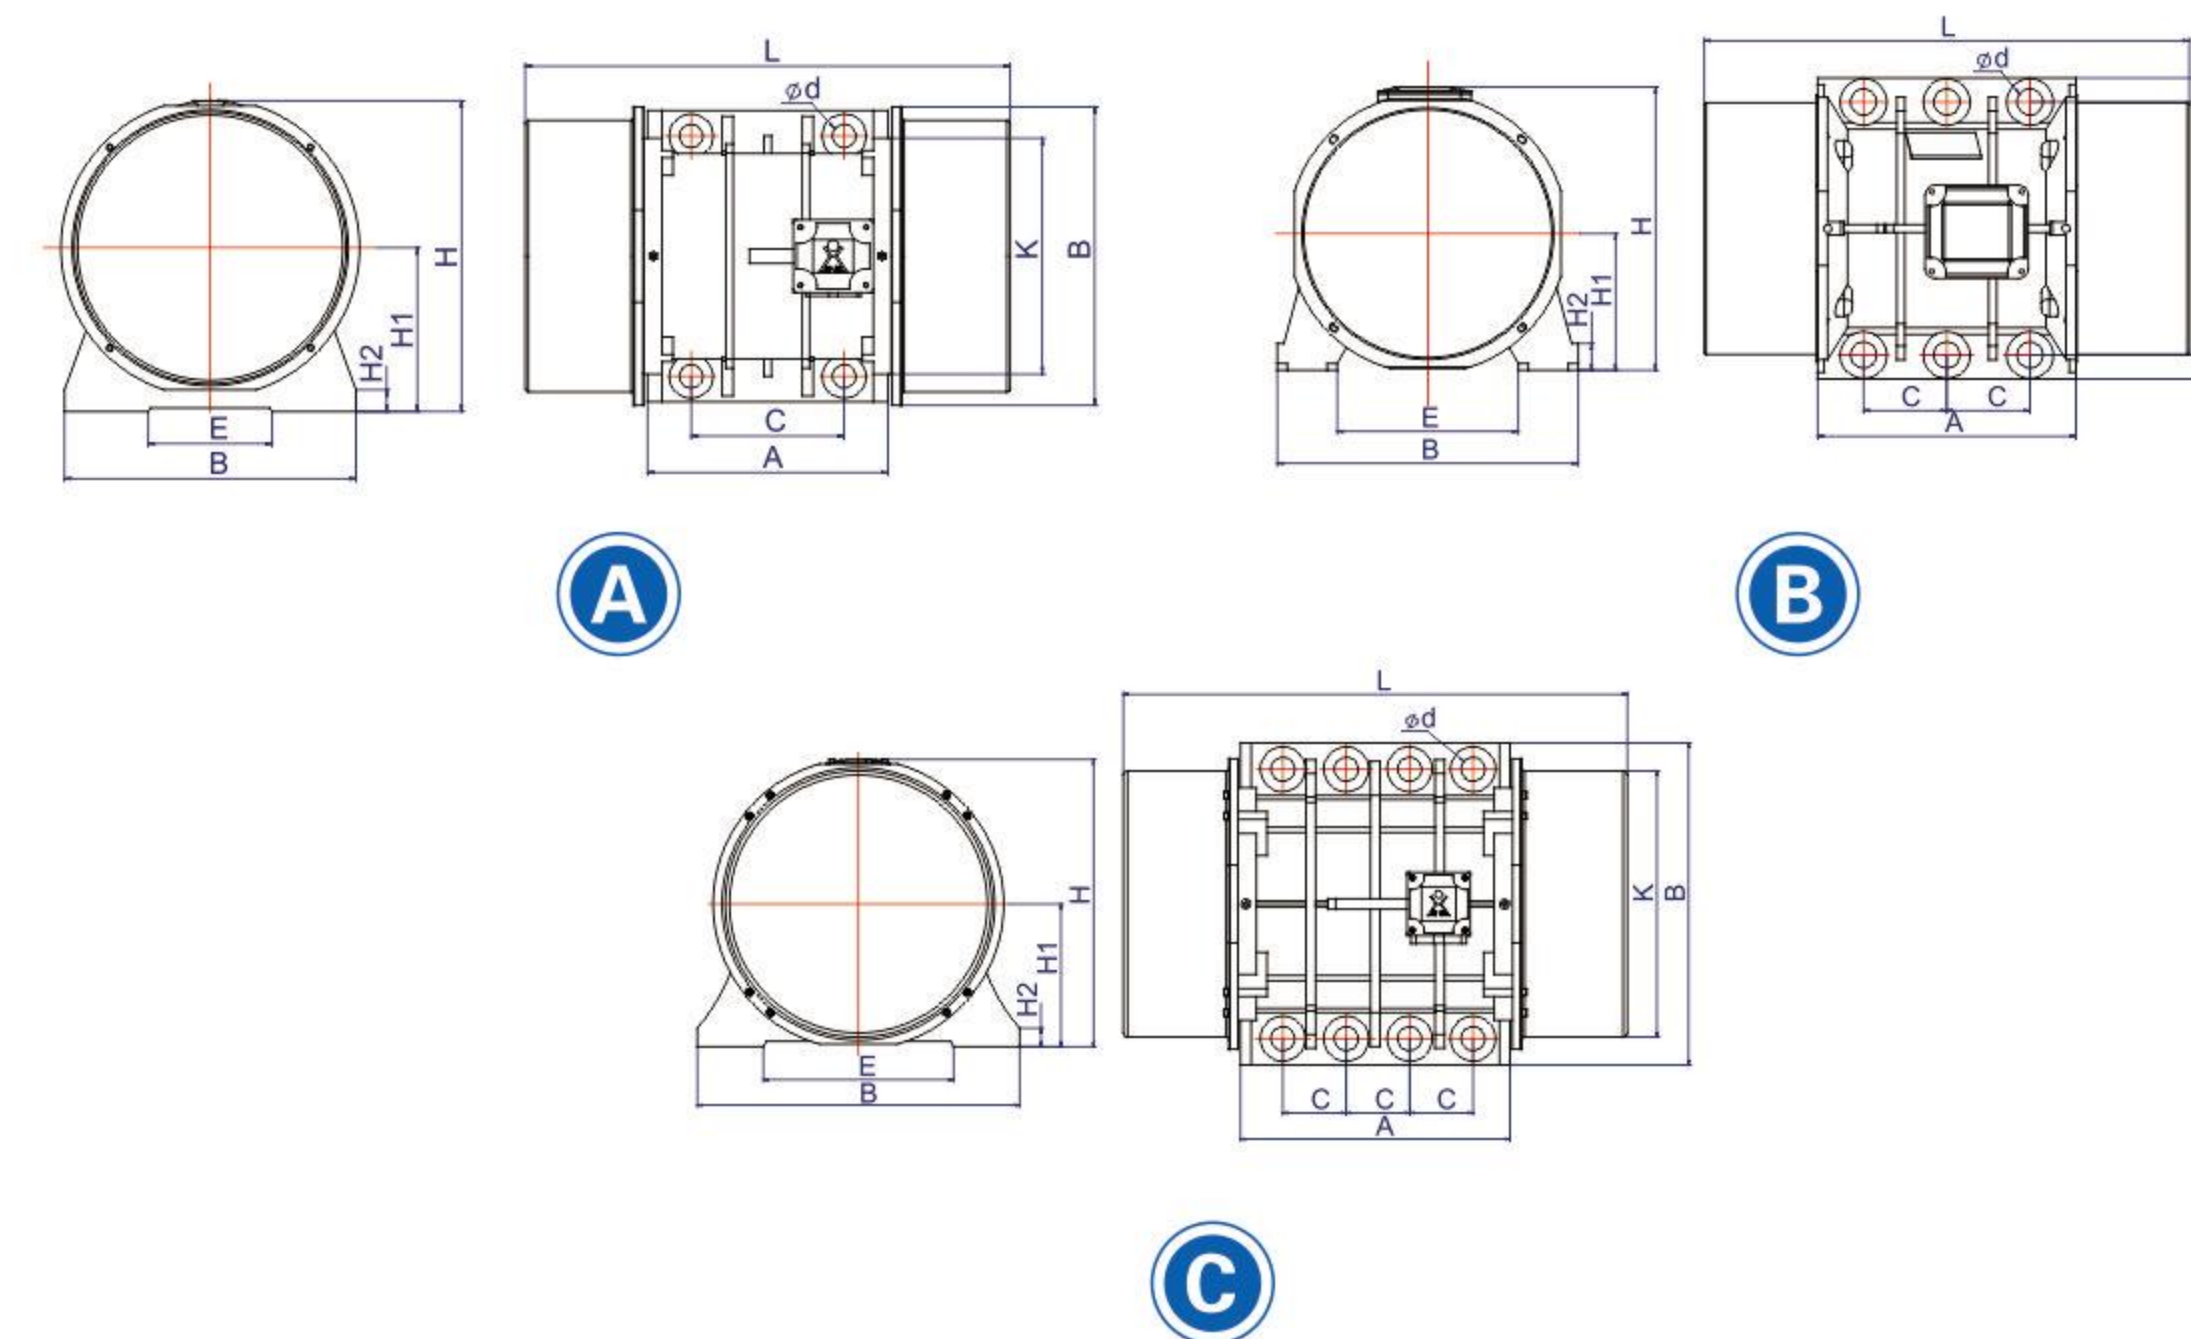


6 POLES-1000 rpm

序号	型号 Type	安装尺寸 (mm)			外形尺寸 Dimeneion (mm)							图号
		C	K	ϕd	L	A	B	E	H	H1	H2	
1	HZW-2.5-6	120	180	18	410	190	230	120	230	120	20	A
2	HZW-5-6	120	180	18	410	190	230	120	230	120	20	A
3	HZW-10-6	135	230	18	460	245	280	130	276	140	20	A
4	HZW-16-6	135	230	18	595	290	280	130	276	140	20	A
5	HZW-20-6	135	230	18	595	290	280	130	276	140	20	A
6	HZW-26-6	140	260	22	550	280	310	140	327	170	25	A
7	HZW-30-6	140	260	22	590	280	310	140	327	170	25	A
8	HZW-40-6	160	320	32	546	290	390	190	390	200	28	A
9	HZW-50-6	160	320	32	590	290	390	190	390	200	28	A
10	HZW-75-6	210	330	32	670	340	400	170	420	225	30	A
11	HZW-100-6	135	380	32	940	430	460	200	450	230	35	B
12	HZW-120-6	135	380	32	1000	430	460	200	450	230	35	B
13	HZW-140-6	118	460	38	1040	520	550	340	520	260	38	C
14	HZW-160-6	118	460	38	1060	520	550	340	520	260	38	C
15	HZW-180-6	120	510	45	1080	520	610	360	548	270	40	C
16	HZW-200-6	120	510	45	1080	520	610	360	548	270	40	C

YBZQ(EX db IIB T4 Gb)系列

系列振动源用隔爆型三相异步电动机技术参数

The teohnical and installation size of YBZQ(EX db IIB T4 Gb)series vibrator motors

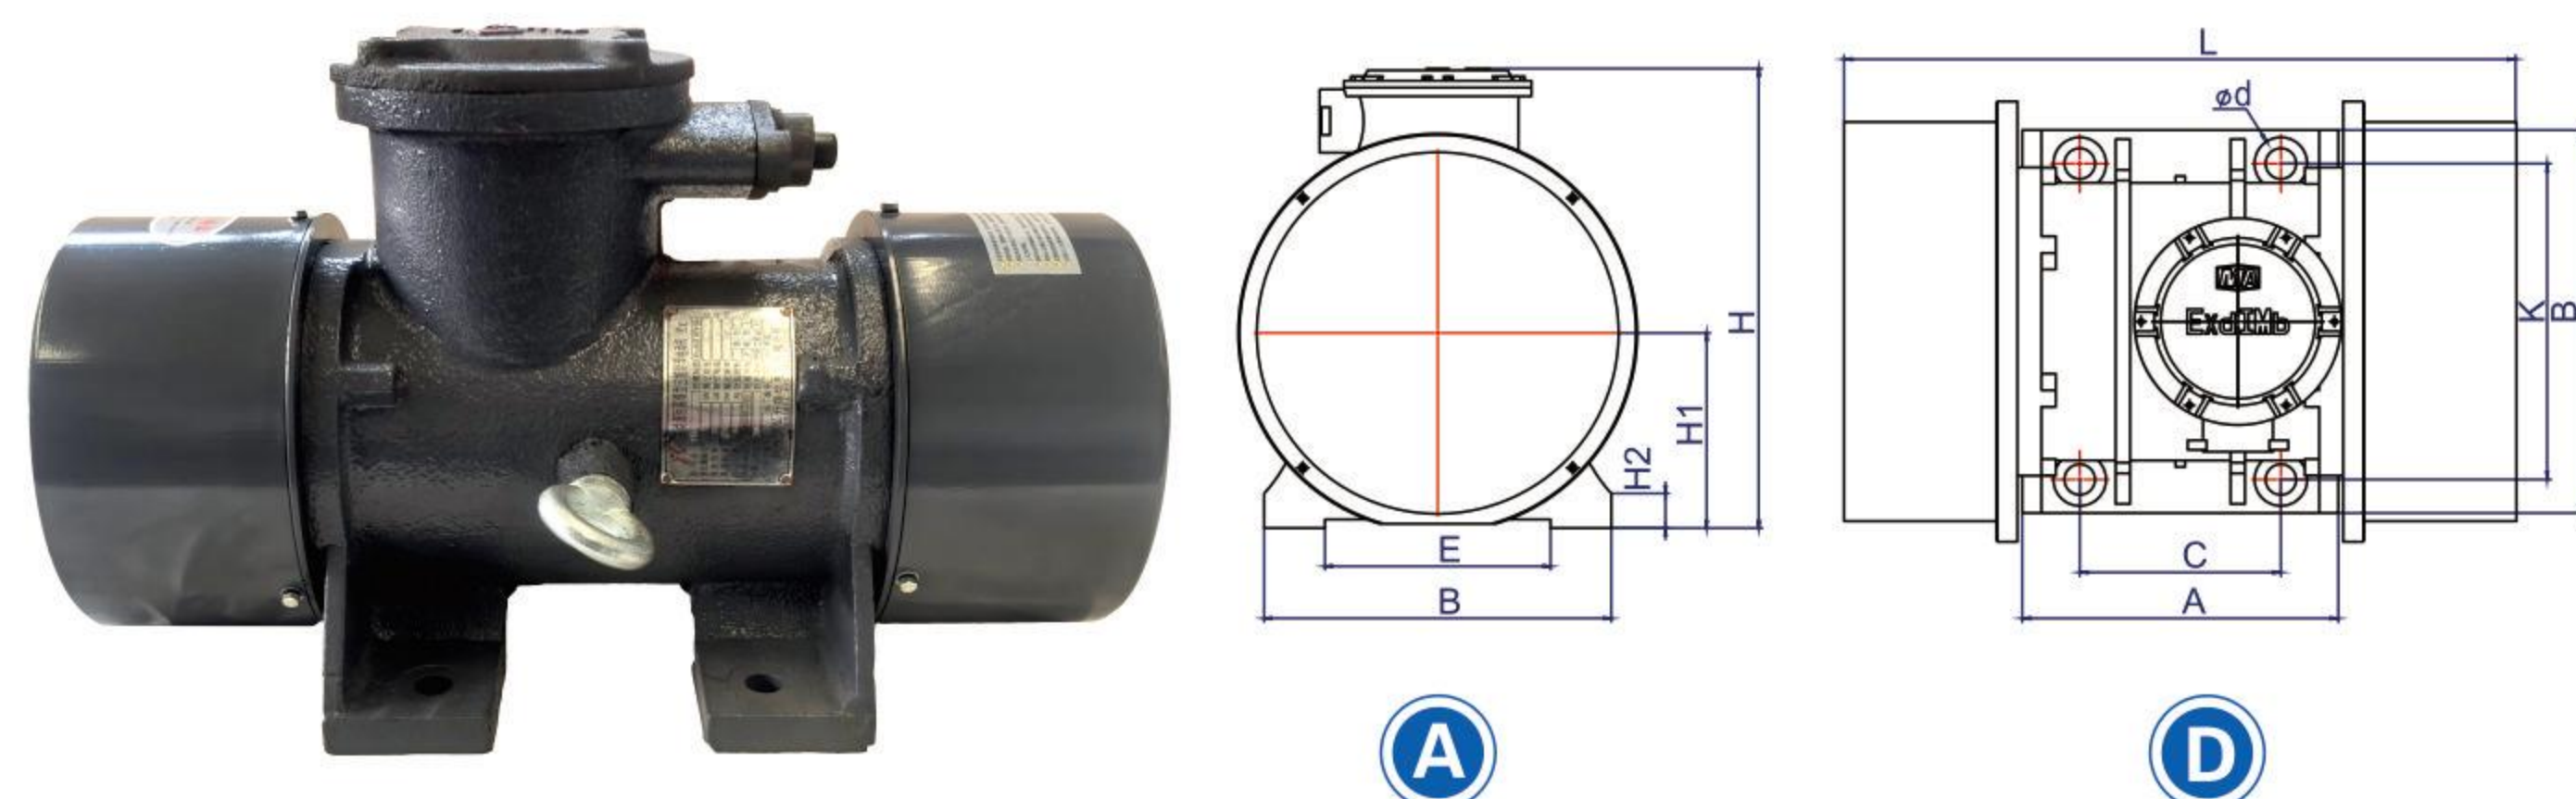


序号	型号 Type	转速 RPM	激振力 C.F (KN)	功率 (KW)	电流 (A)	重量 weight (Kg)	安装尺寸 (mm)			外形尺寸 Dime ne ion(mm)								图号
							C	K	φ d	L	A	B	E	H	H1	H2		
1	YBZQ-5-2	3000	5	0.4	1.02	60	160	200	18	520	270	250	100	310	120	18	AD	
2	YBZQ-8-2	3000	8	0.75	1.76	88	160	230	18	560	290	280	140	360	140	20	AD	
3	YBZQ-10-2	3000	10	1.1	2.56	90	160	230	18	560	290	280	140	360	140	20	AD	
4	YBZQ-16-2	3000	16	1.5	3.7	150	180	270	32	650	340	340	160	410	170	28	AD	
5	YBZQ-20-2	3000	20	1.8	4.26	160	180	270	32	650	340	340	160	410	170	28	AD	
6	YBZQ-30-2	3000	30	3	7.6	170	180	270	32	650	340	340	160	410	170	28	AD	
7	YBZQ-5-4	1500	5	0.25	0.65	62	160	200	18	520	270	250	100	310	120	18	AD	
8	YBZQ-8-4	1500	8	0.4	1.16	92	160	230	18	560	290	280	140	360	140	20	AD	
9	YBZQ-10-4	1500	10	0.55	1.59	93	160	230	18	560	290	280	140	360	140	20	AD	
10	YBZQ-16-4	1500	16	0.75	1.91	125	150	260	22	600	300	310	140	410	170	25	AD	
11	YBZQ-20-4	1500	20	1.1	2.81	130	150	260	22	600	300	310	140	410	170	25	AD	
12	YBZQ-25-4	1500	25	1.5	3.84	176	180	270	22	640	290	310	140	450	170	25	AD	
13	YBZQ-32-4	1500	32	2	4.69	182	180	270	22	640	290	310	140	450	170	25	AD	
14	YBZQ-5-6	1000	5	0.4	1.23	64	160	200	18	520	270	250	10	310	120	18	AD	
15	YBZQ-8-6	1000	8	0.55	1.68	90	160	230	18	560	290	280	40	360	140	20	AD	
16	YBZQ-10-6	1000	10	0.75	2.3	95	160	230	18	560	290	280	140	360	140	20	AD	
17	YBZQ-16-6	1000	16	1.1	3.35	120	160	230	18	610	290	280	140	360	140	20	AD	
18	YBZQ-18-6	1000	18	1.3	3.65	135	150	260	22	600	300	310	140	410	170	25	AD	
19	YBZQ-20-6	1000	20	1.5	3.8	141	150	260	22	600	300	310	140	410	170	25	AD	
20	YBZQ-26-6	1000	26	1.69	4.8	155	150	260	22	600	300	310	140	410	170	25	AD	
21	YBZQ-30-6	1000	30	2.2	5.52	186	180	320	32	630	340	390	190	460	200	28	AD	
22	YBZQ-40-6	1000	40	3	7.7	216	180	320	32	630	340	390	190	460	200	28	AD	

YBZQ(Ex db I Mb)系列

振动源用隔爆型三相异步电动机技术参数

The teohnical and installation size of YBZQ(Ex db I Mb)series vibrator motors

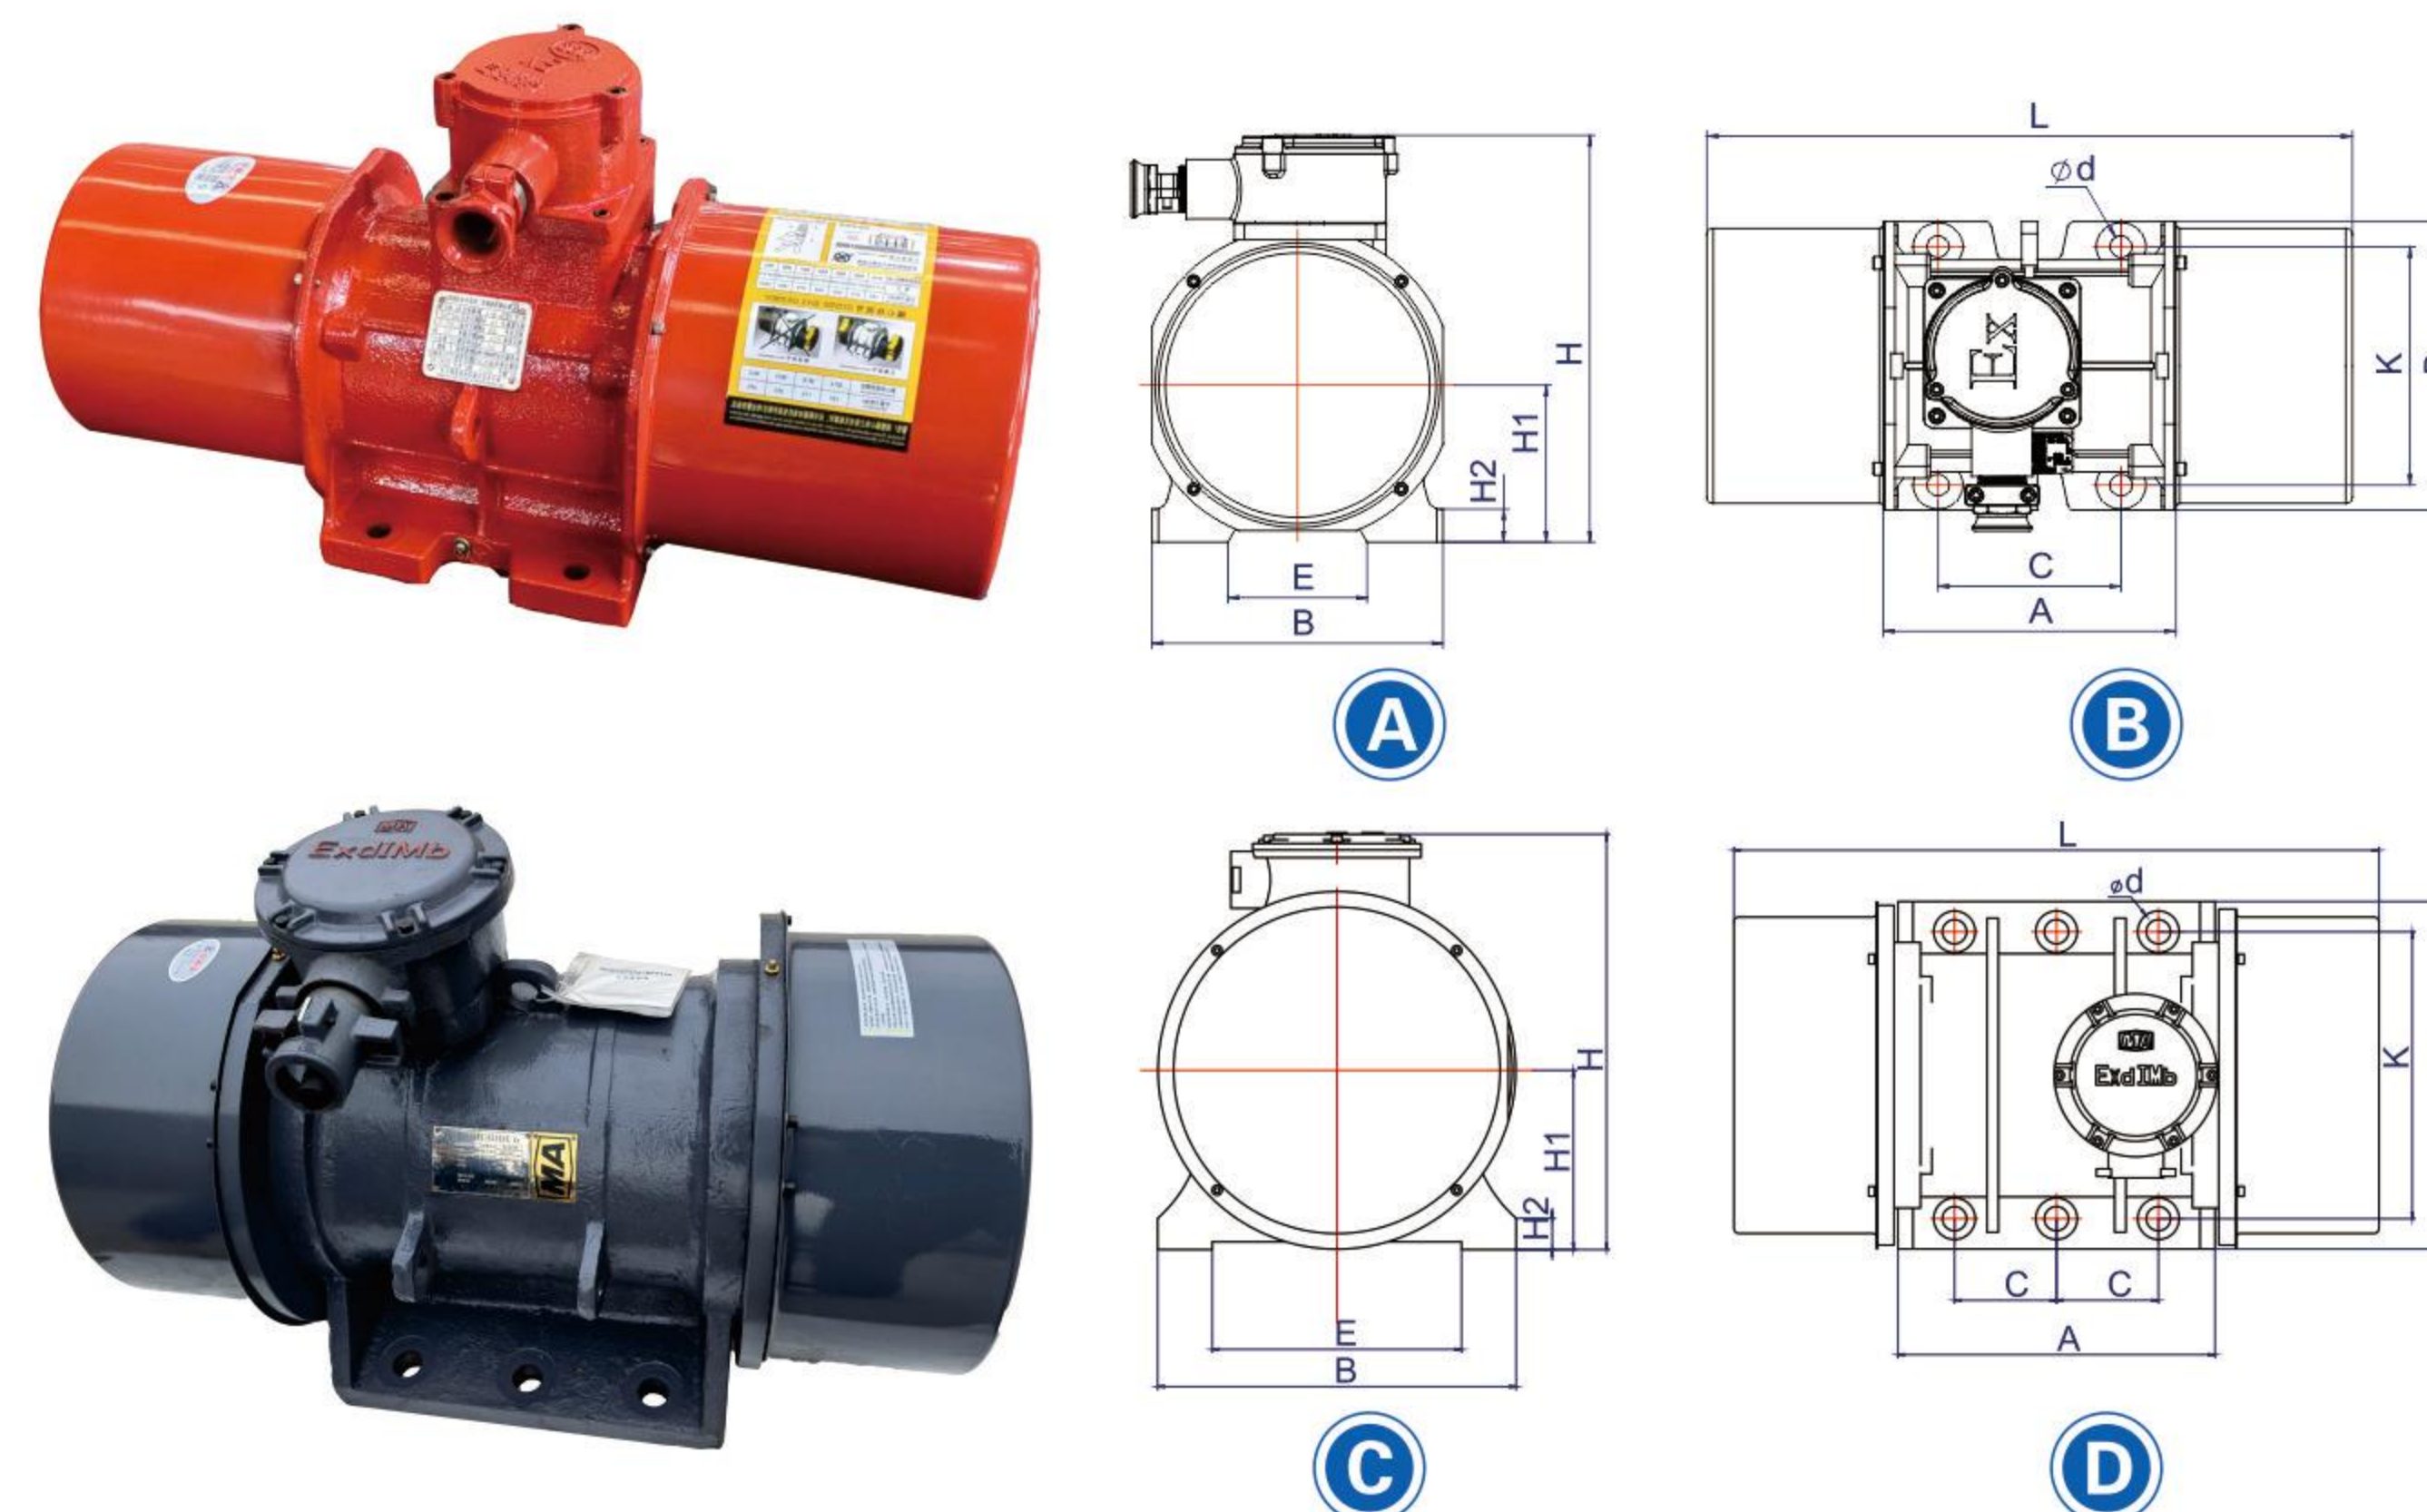

电压660V/1140V



序号	型号 Type	转速 RPM	激振力 C.F (KN)	功率 (KW)	电流 (A)	重量 weight (Kg)	安装尺寸 (mm)			外形尺寸 Dimeneion(mm)							
							C	K	φ d	L	A	B	E	H	H1	H2	图号
1	YBZQ-23-2	3000	23	2	2.35/1.357	74	140	190	17	494	222	230	110	322	124	26	AB
2	YBZQ-16-4	1500	16	0.75	1.63/0.94	68	140	190	17	494	222	230	110	322	124	26	AB
3	YBZQ-24-4	1500	24	1	1.45/0.836	78	140	190	17	494	222	230	110	322	124	26	AB
4	YBZQ-16-6	1000	16	0.75	1.26/0.726	90	140	190	17	620	222	230	110	322	124	26	AB

电压380V/660V

序号	型号 Type	转速 RPM	激振力 C.F (KN)	功率 (KW)	电流 (A)	重量 weight (Kg)	安装尺寸 (mm)			外形尺寸 Dimension (mm)							
							C	K	φ d	L	A	B	E	H	H1	H2	图号
1	YBZQ-50-4	1500	50	2.5	6.3/3.64	260	210	330	32	620	340	400	160	533	225	40	CE
2	YBZQ-75-4	1500	75	4	10.2/5.89	367	135	380	32	815	430	460	200	560	230	35	CD
3	YBZQ-100-4	1500	100	6	15.8/9.12	474	135	380	32	870	430	460	200	560	230	35	CD
4	YBZQ-50-6	1000	50	3.7	9.8/5.66	300	210	330	32	620	330	400	160	533	225	40	CE
5	YBZQ-75-6	1000	75	5.5	13.3/7.68	428	135	380	32	860	430	460	200	560	230	35	CD
6	YBZQ-100-6	1000	100	7.5	18/10.4	430	135	380	32	935	430	460	200	560	230	35	CD

JZO/YZO系列 振动电机技术参数及安装尺寸



The teohnical and installation size of JZO/YZO series vibrator motors

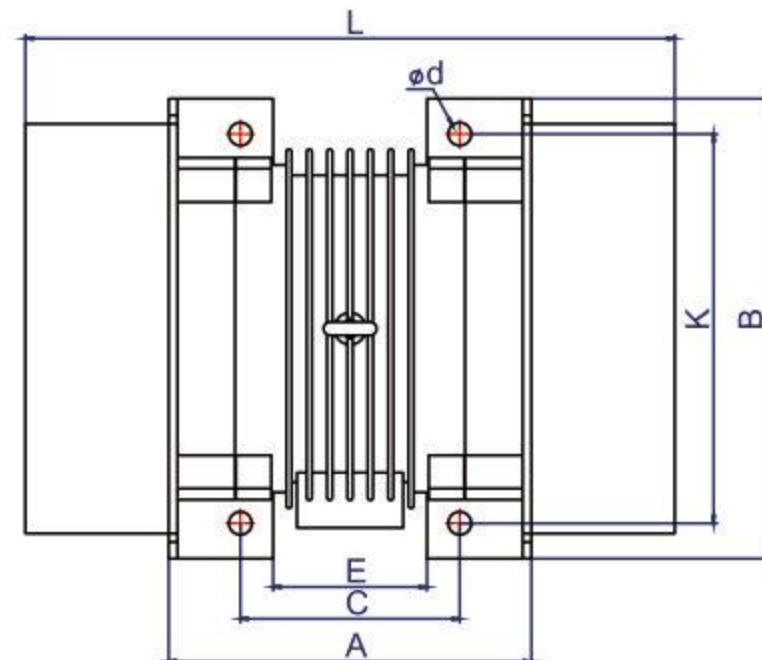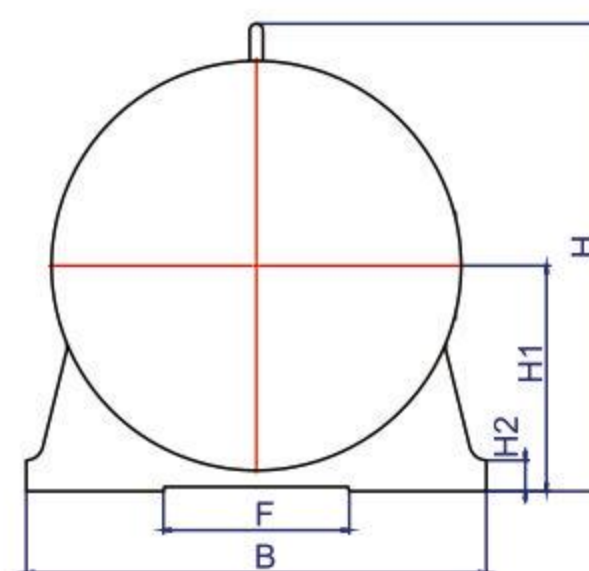

序号	型号 Type	转速 RPM	激振力 C.F (KN)	功率 (KW)	重量 weight (Kg)	安装尺寸 (mm)			外形尺寸 Dimeneion(mm)							
						C	K	φ d	L	A	B	E	H	H1	H2	
1	0.7-2	2860	0.7	0.075	13	116	152	8	270	140	175	92	170	70	22	
2	1.5-2	2860	1.5	0.15	17	126	180	10	290	150	214	102	196	80	25	
3	1.5-2D	2860	1.5	0.15	17	126	180	10	290	150	214	102	196	80	25	
4	2.5-2	2860	2.5	0.25	21	140	180	12	318	168	214	112	196	80	30	
5	2.5-2D	2860	2.5	0.25	21	140	180	12	318	168	214	112	196	80	30	
6	5-2	2860	5	0.4	32	175	220	14	358	208	270	142	216	90	40	
7	8-2	2860	8	0.75	55	180	235	18	400	250	292	123	285	125	30	
8	16-2	2860	16	1.5	90	224	280	20	522	298	330	182	374	170	27	
9	30-2	2860	30	3.0	115	240	280	24	540	315	330	160	341	170	27	
10	35-2	2860	35	4.0	135	240	280	26	640	340	340	160	380	190	27	
11	1.2-4	1460	1.2	0.10	20	126	180	10	290	150	215	102	200	80	22	
12	2.5-4	1460	2.5	0.10	28	140	180	12	318	168	214	112	196	80	30	
13	2.5-4D	1460	2.5	0.10	28	140	180	12	318	168	214	112	196	80	30	
14	5-4	1460	5	0.25	38	175	220	14	388	208	270	142	216	90	40	
15	8-4	1460	8	0.4	58	180	235	18	435	250	292	123	285	125	25	
16	10-4	1460	10	0.55	65	180	235	18	35	250	292	123	285	125	25	
17	16-4	1460	16	0.75	95	224	280	20	522	300	330	182	374	170	30	
18	25-4	1460	25	1.5	80	224	280	20	568	300	330	182	374	170	30	
19	32-4	1460	32	1.5	135	186	310	30	526	396	380	121	374	170	35	
20	50-4	1460	50	2.2	250	195	390	33	615	353	480	115	460	225	37	
21	75-4	1460	75	3.7	343	248	440	36	675	410	520	174	527	255	35	
22	2.5-6	980	2.5	0.2	34	144	220	10	326	166	270	122	216	90	40	
23	5-6	980	5	0.4	48	176	220	14	435	240	270	134	246	120	25	
24	8-6	980	8	0.55	75	180	235	14	465	255	292	134	295	140	30	
25	10-6	980	10	0.75	80	180	235	18	165	255	292	119	289	140	30	
26	18-6	980	18	1.1	113	190	280	20	510	280	330	142	375	170	27	
27	20-6	980	20	1.5	120	190	280	20	510	280	330	142	375	170	27	
28	26-6	980	26	1.9	130	206	280	20	570	300	330	170	375	170	27	
29	30-6	980	30	2.2	154	174	350	30	504	288	430	112	430	200	35	
30	40-6	980	40	3.0	185	174	350	30	540	288	430	12	430	200	35	
31	50-6	980	50	3.7	267	195	390	33	615	353	480	115	460	225	37	
32	75-6	980	75	5.5	393	248	440	36	675	410	520	174	527	255	35	
33	100-6	980	100	7.5	457	300	440	36	780	465	520	225	527	255	35	

ZL系列 振动电机技术参数及安装尺寸

The teohnical and installation size of ZL series vibrator motors

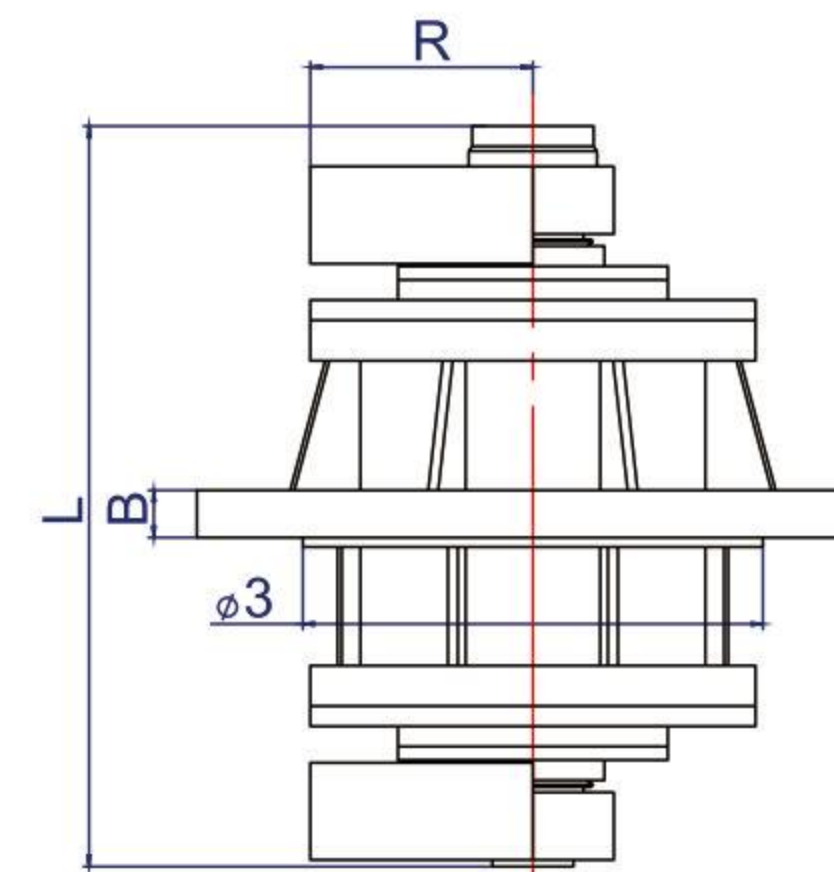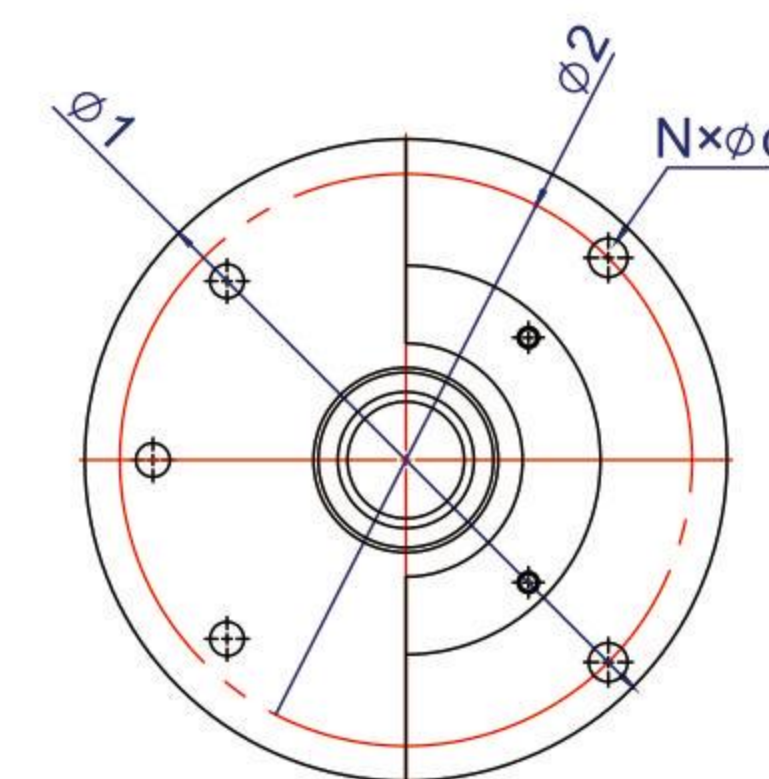

A

序号	型号Type	转速 RPM	激振力 C.F (KN)	功率 (KW)	电流 (A)	安装及外形尺寸 Dime ne ion(mm)							
						φ1	φ2	φ3	B	N×d	L	R	图号
1	ZL-5-2	2860	5	0.4	1.24	264	230	209	14	6×14	330	80	A
2	ZL-8-2	2860	8	0.75	2.1	305	270	230	22	6×15	420	90	A
3	ZL-16-2	2860	16	1.5	4.8	330	300	260	24	6×15	455	110	A
4	ZL-3-4	1460	3	0.1	0.34	240	210	170	16	6×12	280	80	A
5	ZL-5-4	1460	5	0.2	0.65	264	230	209	14	6×14	330	80	A
6	ZL-8-4	1460	8	0.4	1.02	305	270	230	22	6×15	420	105	A
7	ZL-10-4	1460	10	0.55	1.1	305	270	230	22	6×15	440	105	A
8	ZL-16-4	1460	16	0.75	2.3	330	300	260	24	6×15	455	140	A
9	ZL-25-4	1460	25	1.2	3.7	370	330	225	28	6×23	510	140	A
10	ZL-32-4	1460	32	1.5	4.8	400	350	290	30	6×23	535	155	A
11	ZL-50-4	1460	50	2.2	6.96	498	418	341	35	8×25	550	200	A
12	ZL-75-4	1460	75	4.0	10.2	550	460	410	35	8×32	720	220	A
13	ZL-100-4	1460	100	6.5	16.9	650	550	460	40	8×32	860	230	A
14	ZL-5-6	980	5	0.4	1.24	264	230	209	18	6×15	395	110	A
15	ZL-10-6	980	10	0.75	2.3	335	305	210	22	6×15	520	120	A
16	ZL-15-6	980	15	1.1	3.5	420	380	272	30	6×25	530	132	A
17	ZL-20-6	980	20	1.5	4.6	420	380	272	30	6×25	550	145	A
18	ZL-50-6	980	50	3.7	11.4	498	418	341	35	8×32	550	165	A
19	ZL-75-6	980	75	5.5	12.6	650	550	420	40	8×32	790	220	A
20	ZL-100-6	980	100	7.5	18.3	650	550	420	40	8×32	860	220	A
21	HMVELS-1600-4	1460	16	0.75	1.92	310	270	/	15	8×17	342	198	A

LZF系列料仓振动防闭塞装置技术参数及安装尺寸


The teohnical and installation size of LZF series silo vibrator motors

序号	型号 Type	适用料仓 溜槽壁厚 (mm)	锥部容量 (t)	电机型号 Motors type	激振力 Force (KN)	功率 Power (KW)	重量 weight (Kg)	外形尺寸 Dimeneion (mm)
1	LZF-3	1.6-3.2	0.35	JZO-0.7-2	0.7	0.075	17	240 × 285 × 245
2	LZF-4	3.2-4.5	1	JZO-1.5-2	1.5	0.15	26	260×330 × 285
3	LZF-5	4.5-6	3	JZO-2.5-2	2.5	0.25	31	280×330 × 275
4	LZF-6	6-8	10	JZO-5-2	5	0.4	53	400 × 460×330
5	LZF-10	8-10	20	JZO-8-2	8	0.75	86	420 × 460×400
6	LZF-15	10-13	50	JZO-16-2	16	1.5	160	590 × 550 × 515
7	LZF-25	15-25	150	JZO-30-2	30	3	220	597 × 728 × 430
8	LZF-40	25-40	200	JZO-35-2	35	4	280	673×820 × 450



ZLC系列振动电机技术参数及安装尺寸

The teohnical and installation size of ZLC series vibrator motors

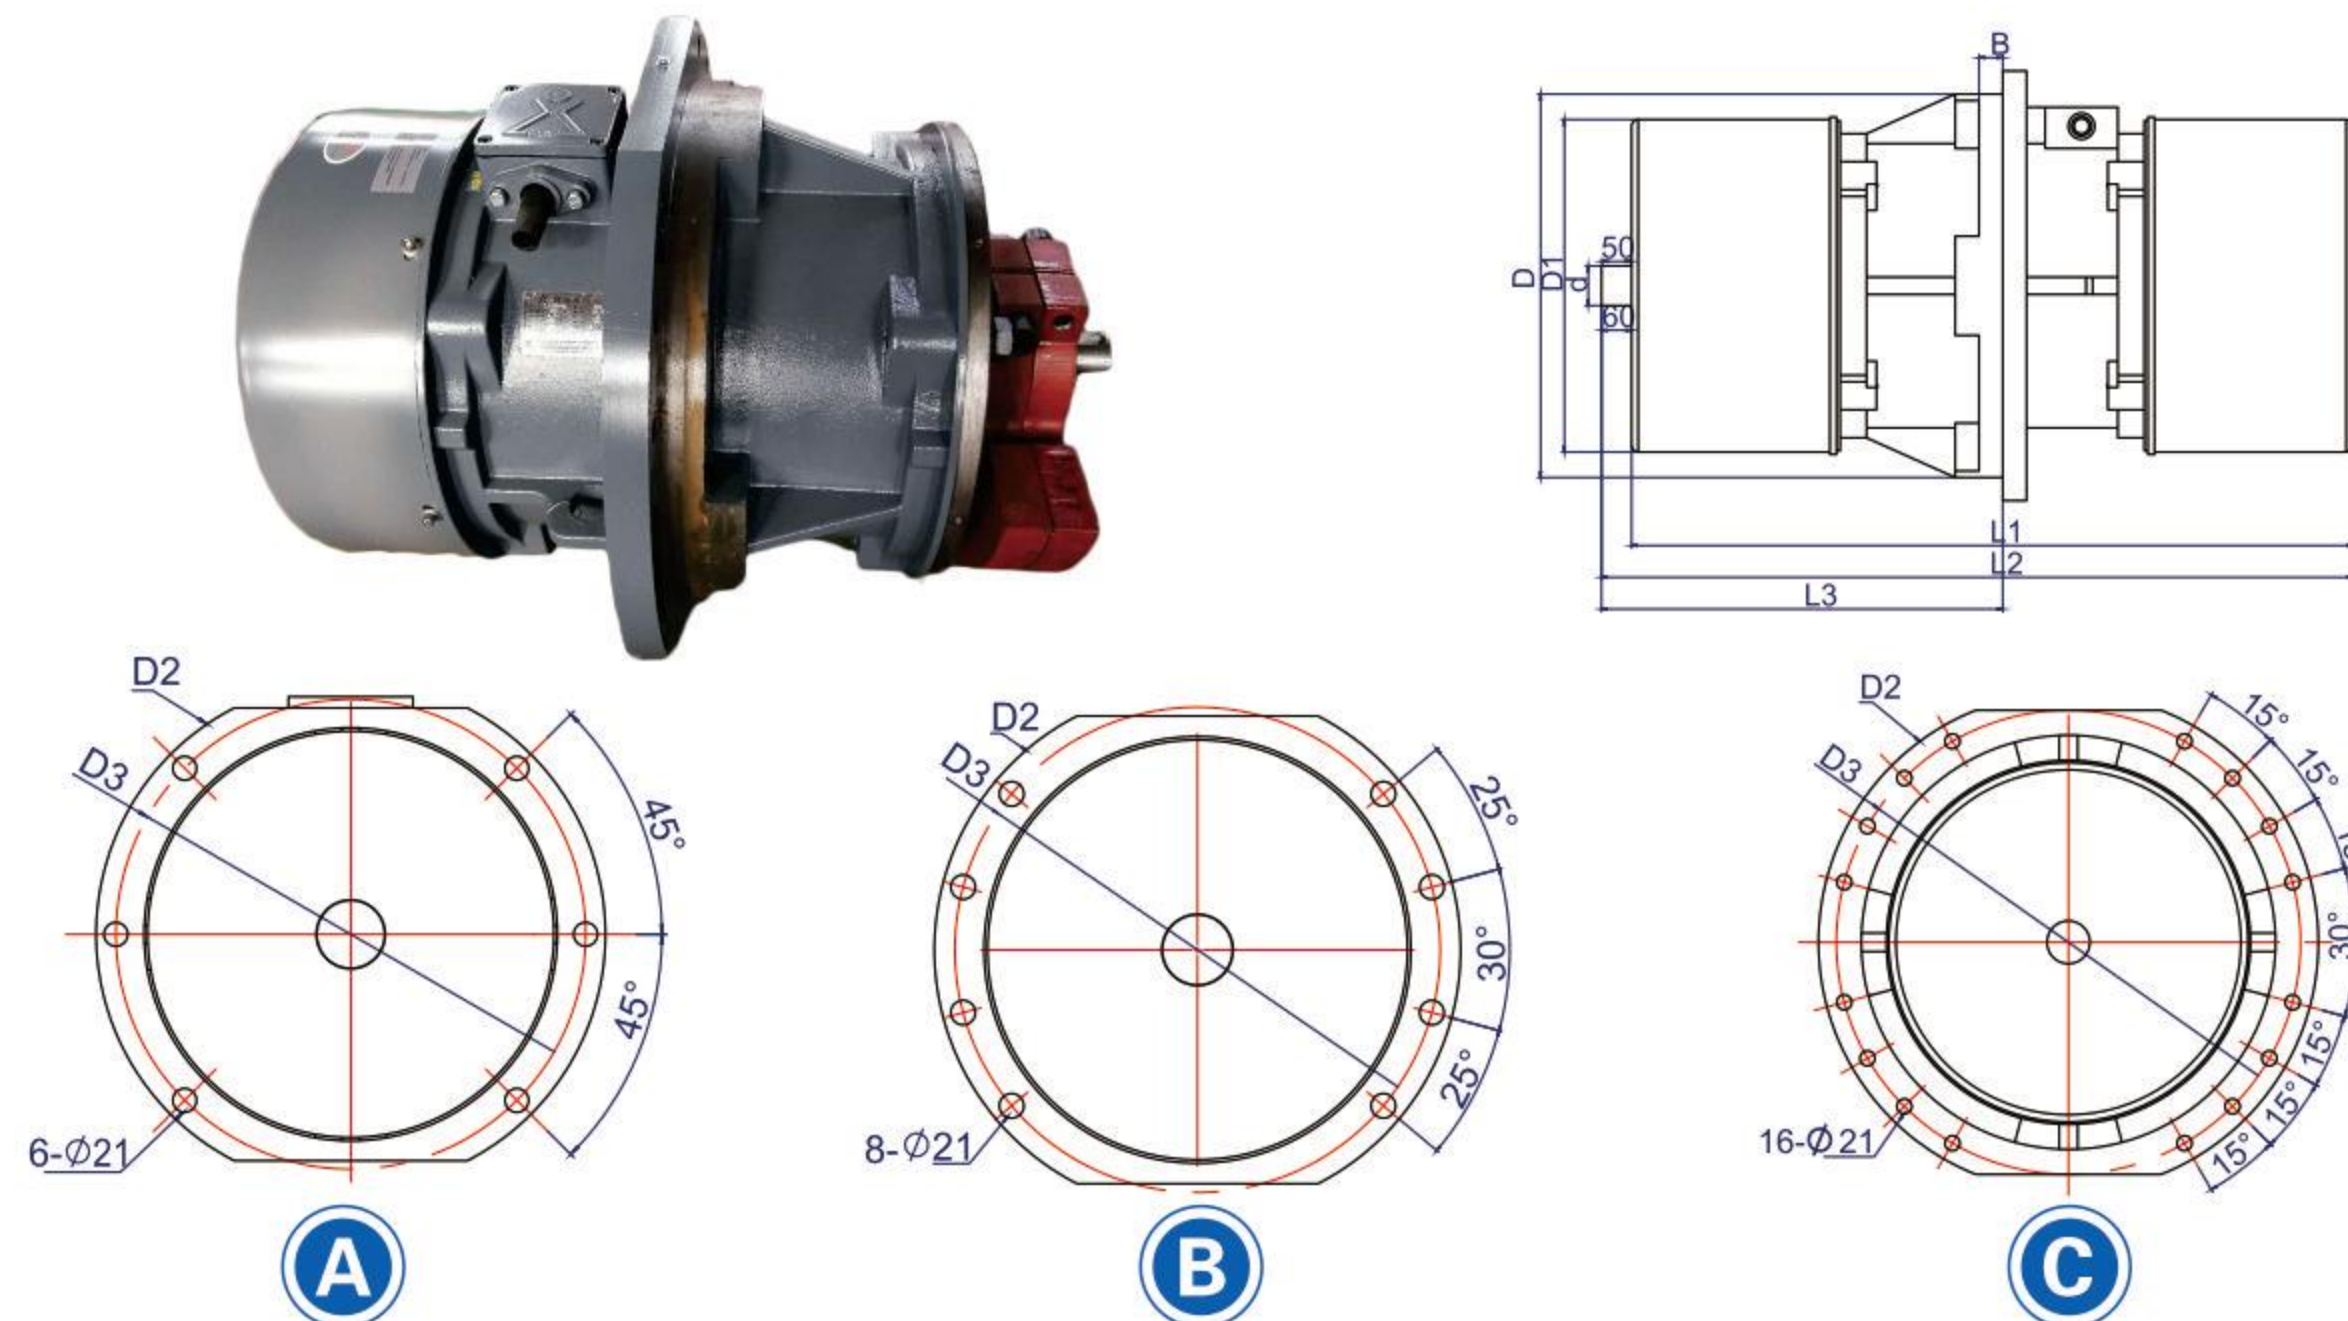

序号	型号 Type	转速 RPM	激振力 C.F (KN)	功率 (KW)	电流 (A)	重量 weight (Kg)	安装尺寸 (mm)				外形尺寸 Dimeneion(mm)								图号
							D	D1	D2	D3	L1	L2	L3	B	d	C	F		
1	ZLC-50-4	1460	50	2.5	5.8	210	365	350	455	415	520	595	350	24	60	55	12	A	
2	ZLC-75-4	1460	75	4	10.2	270	400	370	500	450	590	660	380	30	60	55	12	B	
3	ZLC-15-6	980	15	1.1	3.3	100	280	250	370	330	490	570	335	24	36	32	8	A	
4	ZLC-25-6	980	25	1.8	4.6	135	315	300	405	365	560	630	355	24	45	41	8	A	
5	ZLC-35-6	980	35	2.4	6	185	365	350	455	415	550	620	350	24	50	45	12	A	
6	ZLC-50-6	980	50	3.7	9.8	280	400	370	500	450	590	660	380	30	60	55	12	B	
7	ZLC-75-6	980	75	5.5	13.3	360	430	420	530	480	660	730	400	30	60	55	18	B	
8	ZLC-100-6	980	100	7.5	18	470	430	420	530	480	816	880	480	30	60	55	18	B	
9	ZLC-135-6	980	135	9	21	658	580	504	700	650	800	860	480	36	60	55	18	C	
10	ZLC-160-6	980	160	12	28	730	580	504	700	650	920	980	540	36	60	55	18	C	
11	ZLC-160-8	740	160	10	28	873	580	504	700	650	1076	1129	609	36	60	55	18	C	

YFBZ(Ex tb IIIC T130°C Db)系列 粉尘防爆型振动源三相异步电动机技术参数

The teohnical and installation size of YFBZ(Ex tb IIIC T130°C Db)series vibrator motors


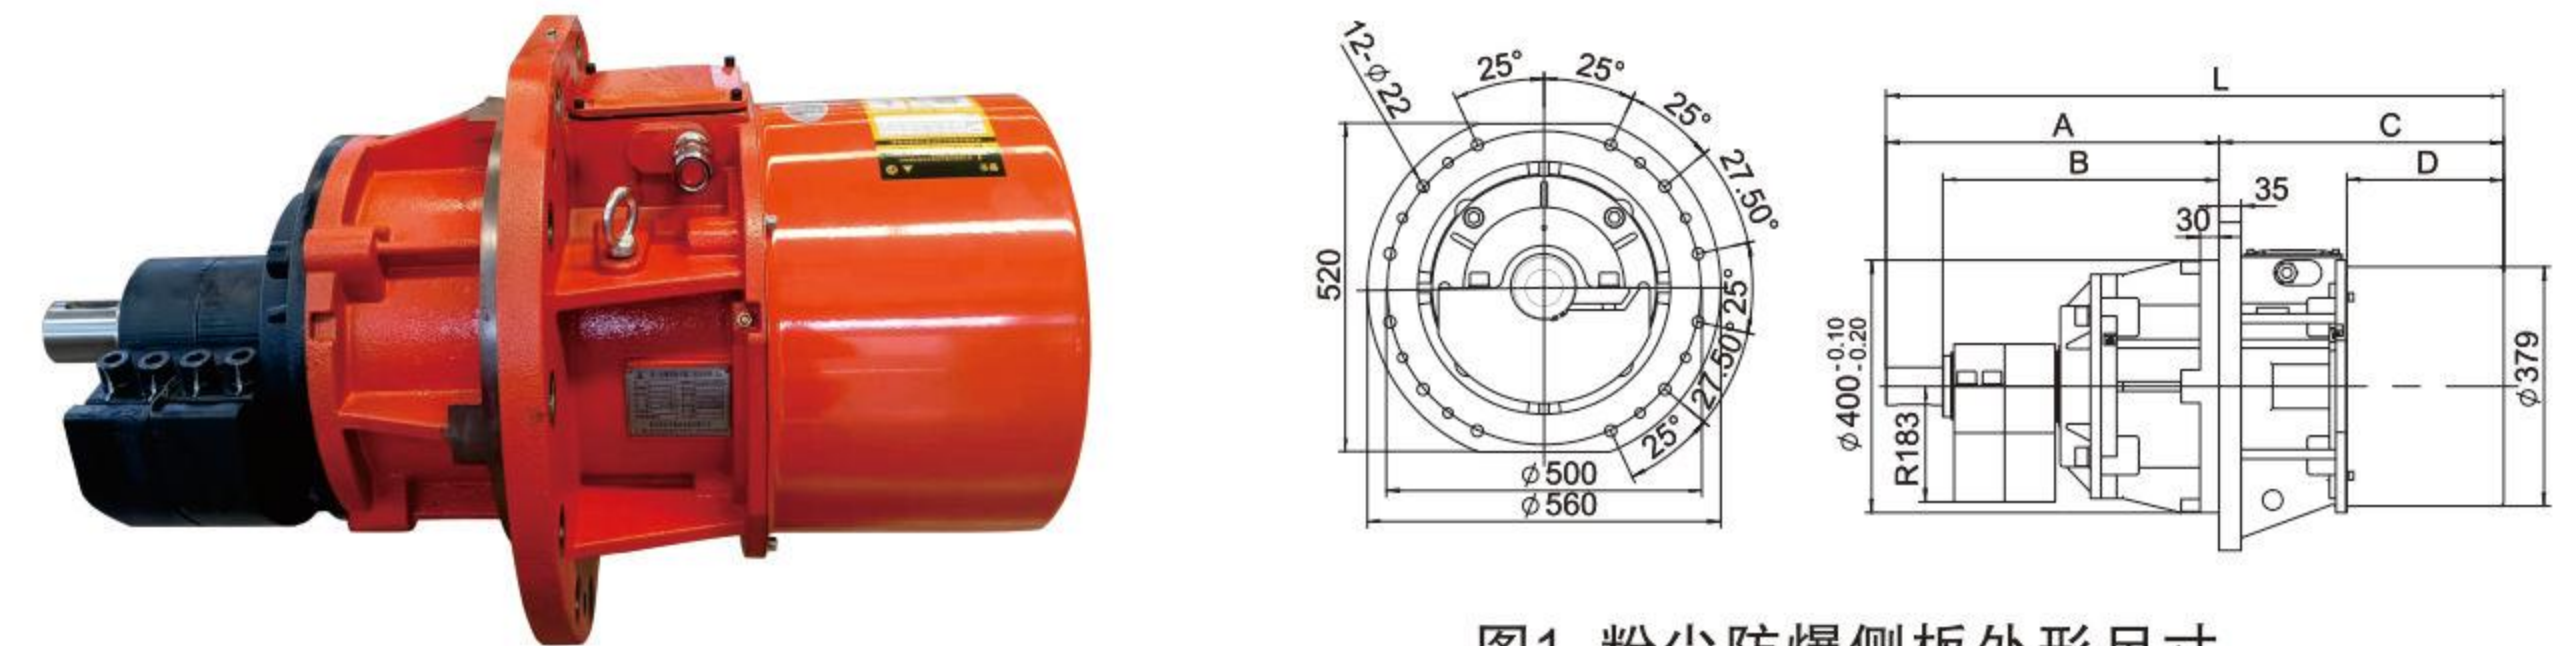


图1 粉尘防爆侧板外形尺寸

型号 Type	转速 RPM	激振力 C.F (KN)	功率 (KW)	电流 (A)	重量 weight (Kg)	A	B	C	D	L	安装螺钉	轴端类型	图号
YFBZ-8000-6-C	1000	80	5.1	20/11.5	330	471.5	381.5	406	205	877.5	M20	c	图1
YFBZ-9000-6-C	1000	90	5.1	20/11.5	335	471.5	381.5	406	205	877.5	M20	c	图1
YFBZ-10000-6-C	1000	100	5.5	20/11.5	424	527.5	437.5	451	250	978.5	M20	c	图1
YFBZ-13000-6-C	1000	130	7	19.8/11.4	476	567.5	477.5	491	290	1058.5	M20	c	图1
YFBZ-8000-8-C	750	80	6.6	16/9.25	490	609.5	519.5	546	345	1155.5	M20	c	图1
YFBZ-9000-8-C	750	90	6.6	16/9.25	510	609.5	519.5	546	345	1155.5	M24	c	图1
YFBZ-10000-8-C	750	100	7.4	36.9/21.2	530	609.5	519.5	566	365	1175.5	M24	c	图1

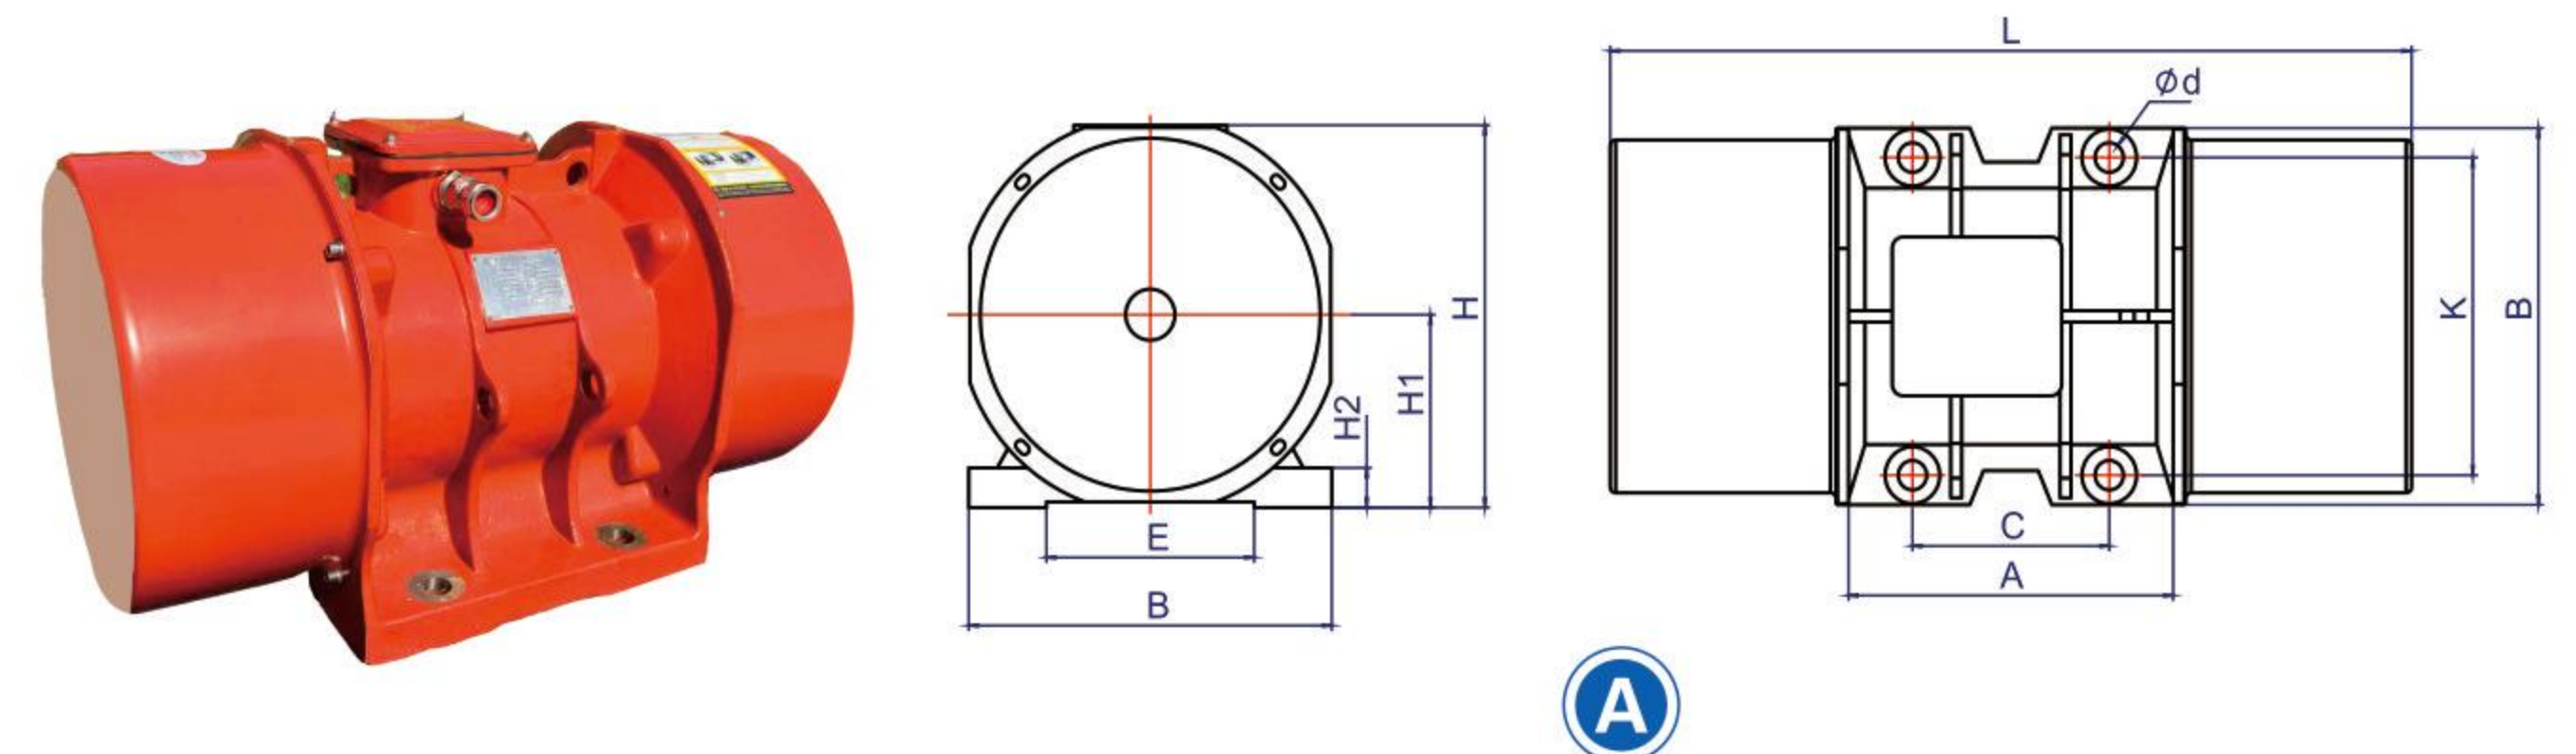

型号 Type	转速 RPM	激振力 C.F (KN)	功率 (KW)	电流 (A)	重量 weight (Kg)	安装尺寸(mm)			外形尺寸Dimeneion(mm)							
						C	K	φd	L	A	B	E	H	H1	H2	图号
YFBZ-6500-2-W	3000	65	4.2	9.5	203.5	200	320	28	624	364	385	235	402	203	40	A
YFBZ-9000-2-W	3000	90	7.2	17.8	215.6	200	320	28	624	364	385	235	402	203	40	A
YFBZ-7200-4-W	1500	72	3	8.5	231.5	200	320	28	624	364	385	235	402	203	40	A
YFBZ-9000-4-W	1500	90	5.8	13.5	245	200	320	28	624	364	385	235	402	203	40	A
YFBZ-5200-6-W	1000	52	2.6	6.86	279.9	200	320	28	704	364	385	235	402	203	40	A
YFBZ-6500-6-W	1000	65	2.9	7.62	304.3	200	320	28	704	364	385	235	402	203	40	A
YFBZ-8000-6-W	1000	80	4.5	9.95	315.9	200	320	28	774	364	385	235	402	203	40	A
YFBZ-9000-6-W	1000	90	5	11.08	335.7	200	320	28	774	364	385	235	402	203	40	A