GOOD QUALITY
FROM HENGCHUANG

TAIZHOU HENGCHUANG TRANSMISSION
MACHINERY CO., LTD.

Add:No.1 Park North Road, Fengjiang Street, Luqiao District, Taizhou, Zhejiang, China
Tel:+86 13616672358 Fax:+86-576-82678911 WhatsApp:+62 896-7699-6060
www.yszzgbx.com E-mail:sales2@yszzgbx.com

HENGCHUANG GEAR BOX

SPIRAL BEVEL GEARBOX, STRAIGHT GEARBOX, WORM GEARBOX, CYLINDRICAL GEARBOX







TAIZHOU HENGCHUANG TRANSMISSION
MACHINERY CO., LTD.

Taizhou HENGCHUANG TRANSMISSION

Taizhou Hengchuang Transmission Machinery Co., LTD. founded in May 2006, is located in economic development zone of Taizhou city Zhejiang province. It has 120 employees, occupies a land of 8,000m, and produces an annual output worth of RMB 120 million. It's a company committed to the design, development, production, sales and service of reducers and construction machinery products. It has a series of advanced processing equipment, such as double station horizontal machining center and vertical machining center, gear hobbing, gear shaving and gear grinding machine, etc., and it's equipped with various advanced tooth shape and tooth direction testing center and coordinate measuring machine. More than 85% of exports to Europe, the USA, Australia, Asia, Canada and so on. Over the years, adhering to the quality-oriented, customer first concept, continuous innovation and development, it has become one of the industry's highly praised transmission manufacturers. Welcome to contact us by phone or email!





20 years TRANSMISSION MACHINERY


HENGCHUANG Quality Supervision

We provide a detailed solution to determine if the product can meet your needs.
The excellent talents are vigorous guarantees for contemporary enterprise to remain in vincible.
As a thriving enterprise which is cored by technology,
HENGCHUANG regards the gifted people as the most precious fortune of the company.
We strongly believe that powerful talent team
is main thrust to push forward HENGCHUANG to a bright future!





AGRICULTURAL MACHINERY
GEARBOX

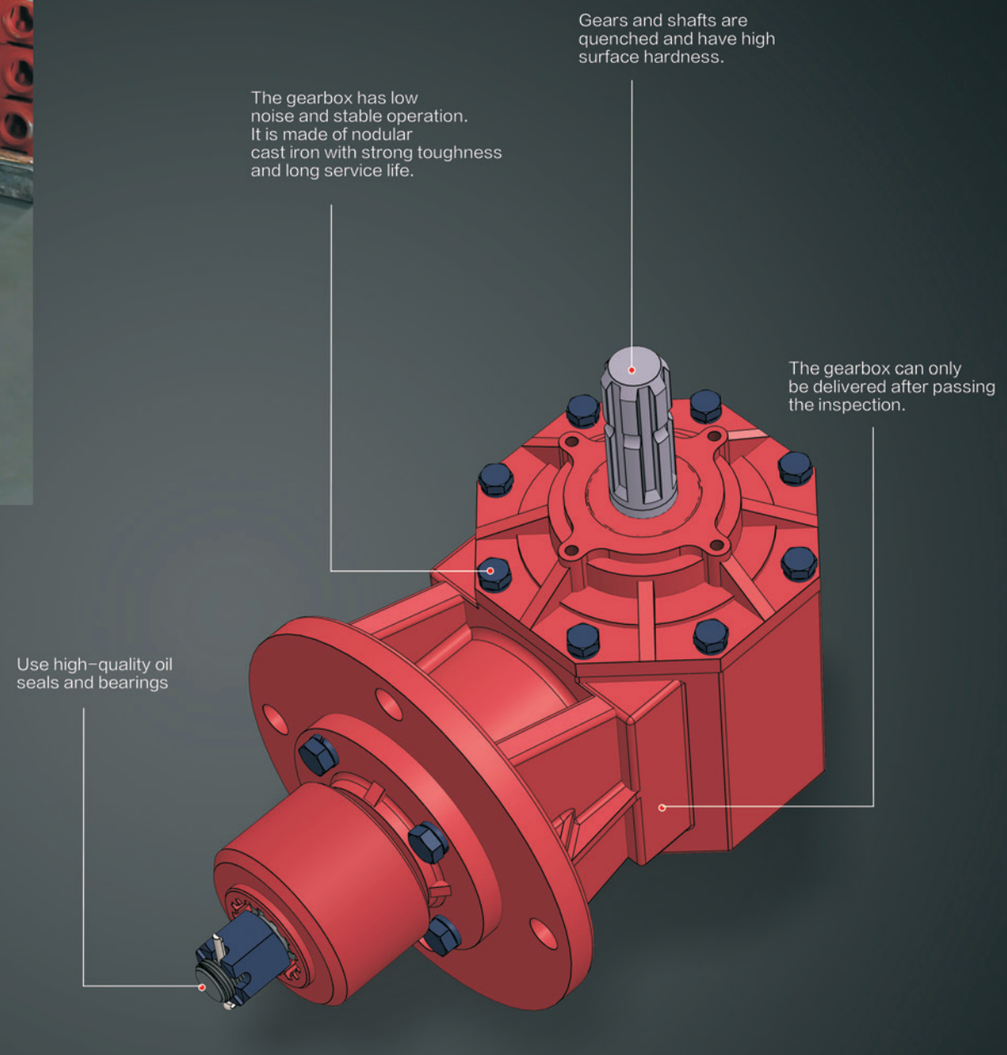



APPLICATION

Its products are used in a variety of applications, like farm mower, snow sweeper, fertilizer applicator, grain conveyor, industrial equipment, petroleum mining machinery, ship industry equipment, and engineering hydraulic components.


ROTARY CUTTER

GEARBOX

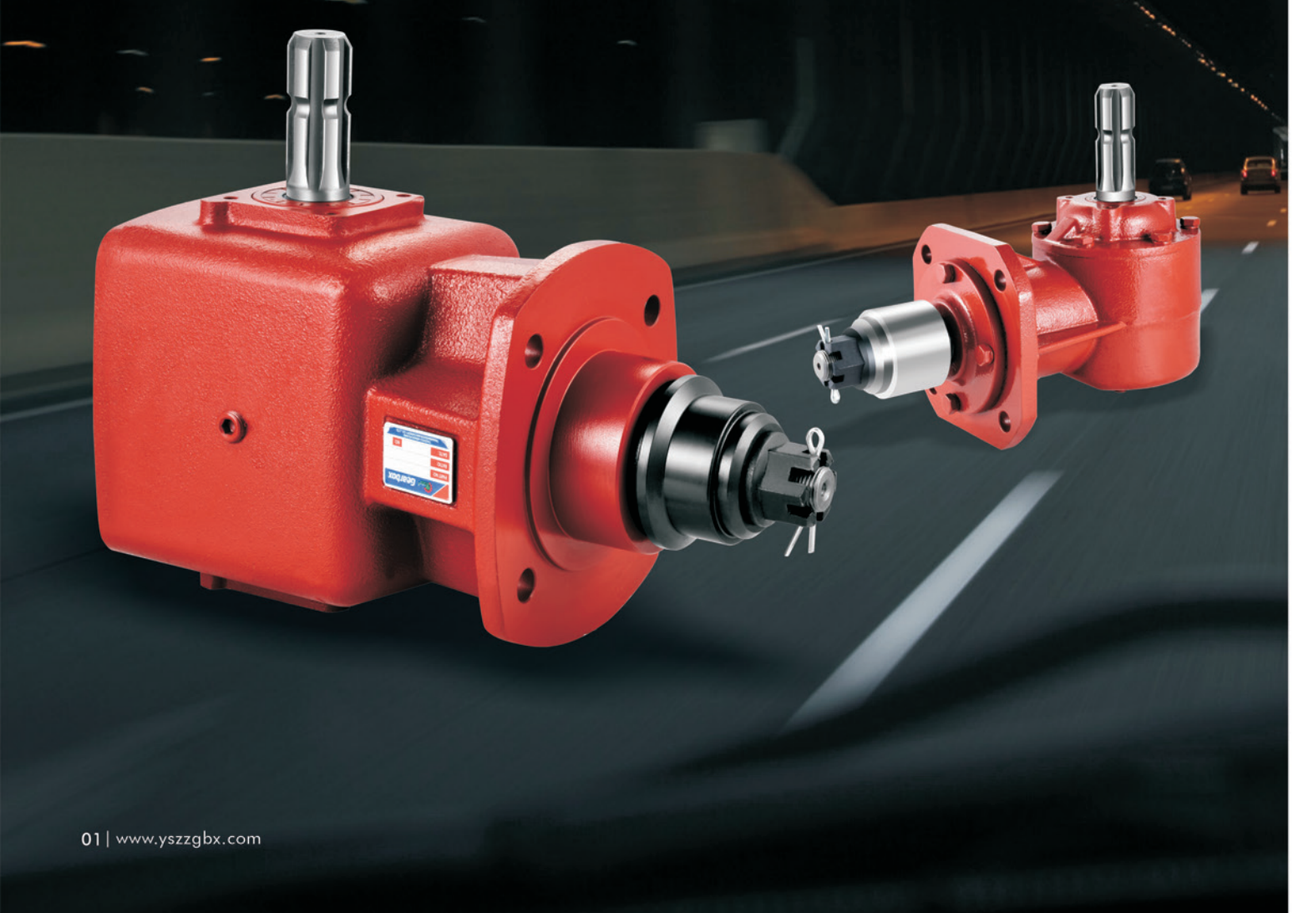


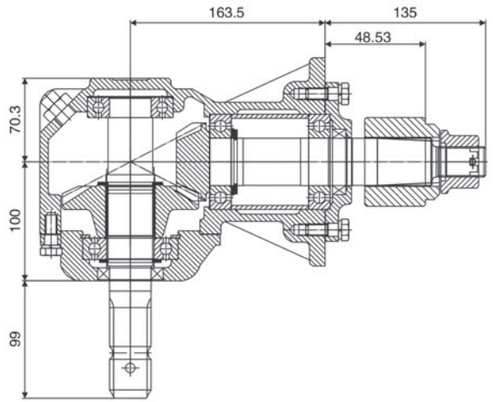

PRODUCT PARAMETERS	
ITEM	HC-RC31
Ratio	1:1.46 / 1:1.69 / 1:1.93 / 1:2.3
Teeth	22/15 / 22/13 / 29/15 / 28/12
Module	5.08 / 5. 0 / 4.0 / 4.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis / Taper spline
Weight(N.W)	21.5Kg

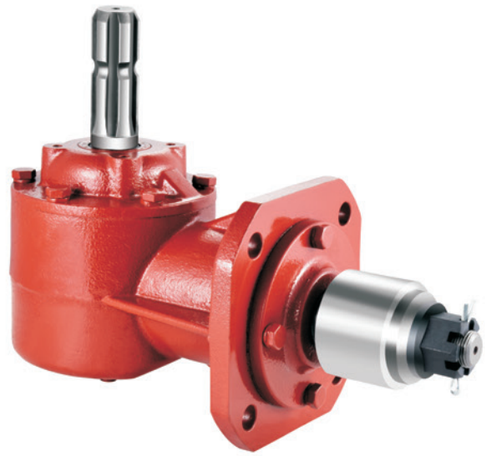


HC-RC31

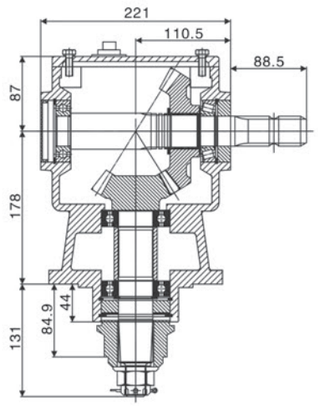


PRODUCT PARAMETERS	
ITEM	HC-55
Ratio	1:1.6 / 1:1.93 / 1:2.83
Teeth	24/15 / 27/14 / 34/12
Module	6.0 / 5.64 / 4.5
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Taper spline
Weight(N.W)	29Kg




HC-55

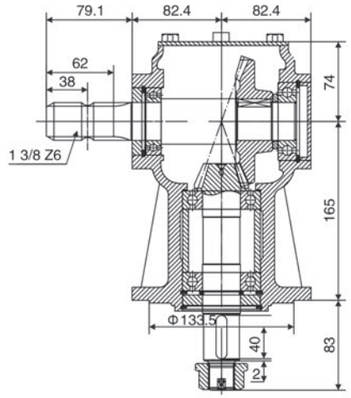


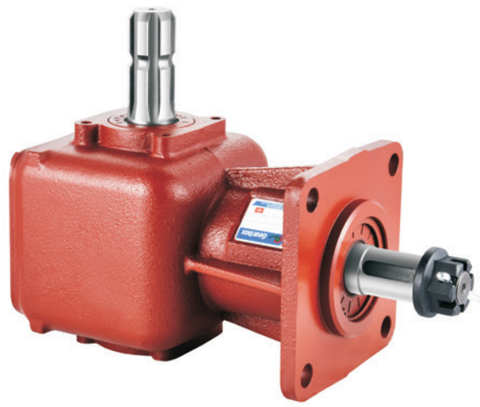

HC-LF211


PRODUCT PARAMETERS	
ITEM	HC-LF211
Ratio	1:2.83
Teeth	34/12
Module	3.36
Power(HP)	20
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	14.5Kg

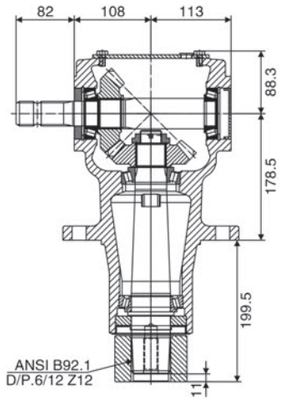


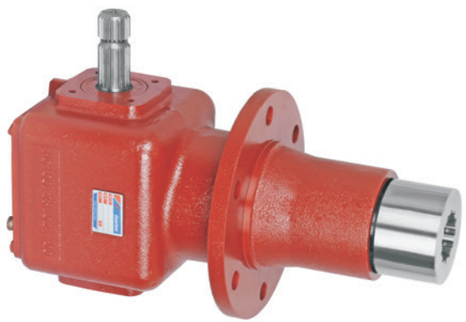

HC100-231021-00


PRODUCT PARAMETERS	
ITEM	HC100-231021-00
Ratio	1:1
Teeth	20/20
Module	6.0
Power(HP)	80
Input Rate	540 rpm
Input/Output Description	1 3/8 Z21
Weight(N.W)	41. 5Kg

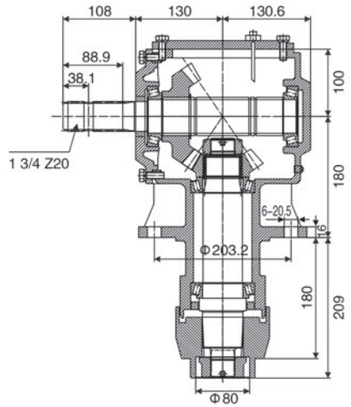


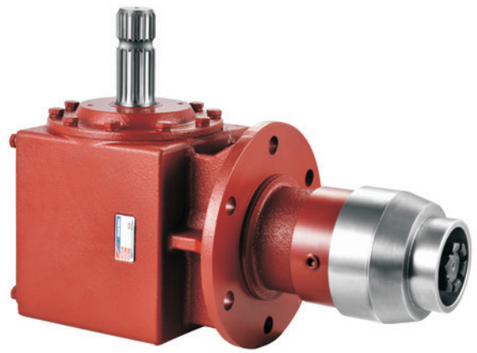

HC-RC130-146


PRODUCT PARAMETERS	
ITEM	HC-RC130-146 / HC-RC130-192
Ratio	1:1.46 / 1:1.92
Teeth	19/13 / 27/14
Module	6 / 8
Power(HP)	130 / 100
Rated Input	540 rpm
Input/Output Description	1 3/4 Z20 Taper spline
Weight(N.W)	56Kg

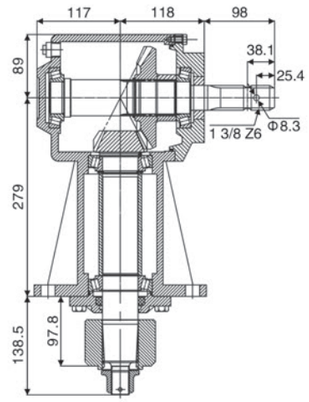

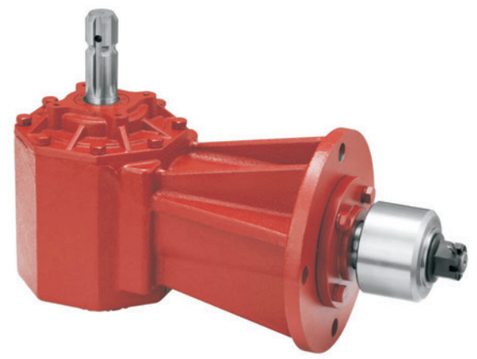

HC-RC81


PRODUCT PARAMETERS	
ITEM	HC-RC81
Ratio	1:1.93 / 1:146
Teeth	27/14 / 19/13
Module	5.5 / 7.0
Power(HP)	80
Rated Input	600 rpm
Input/Output Description	1 3/8 Z6 Taper spline
Weight(N.W)	44Kg

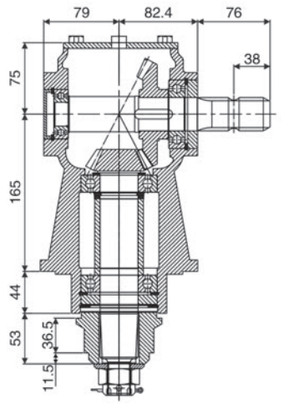




HC-LF205


PRODUCT PARAMETERS	
ITEM	HC-LF205
Ratio	1:1.46 / 1:1.93
Teeth	22/15 / 23/12
Module	5.0 / 5.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / 0ptic axis Taper spline
Weight(N.W)	19Kg

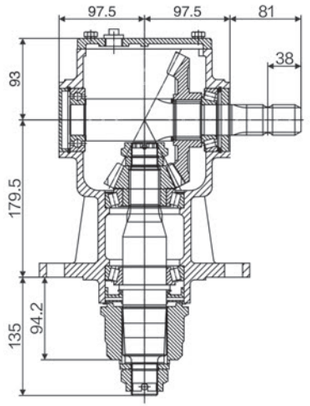


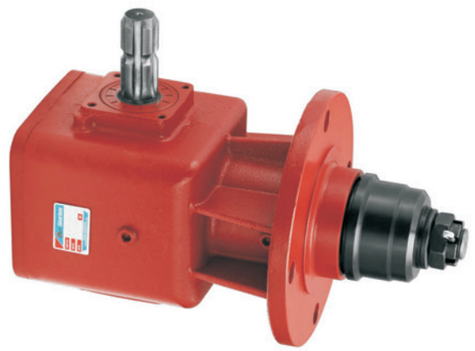

HC-140


PRODUCT PARAMETERS	
ITEM	HC-140
Ratio	1:1.5 / 1:1.93
Teeth	21/14 / 27/14
Module	5.7 / 5.64
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Taper spline
Weight(N.W)	30Kg

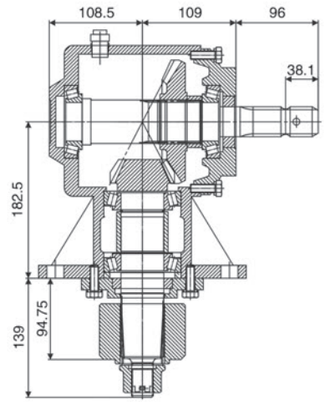


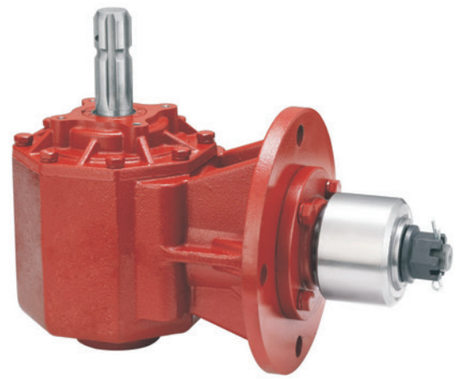

HC-RC61


PRODUCT PARAMETERS	
ITEM	HC-RC61
Ratio	1:1.46 / 1:1.93
Teeth	19/13 / 27/14
Module	7.0 / 5.5
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Taper spline
Weight(N.W)	36.5Kg

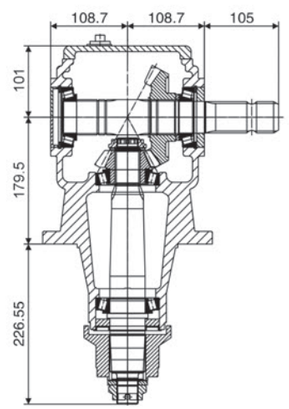

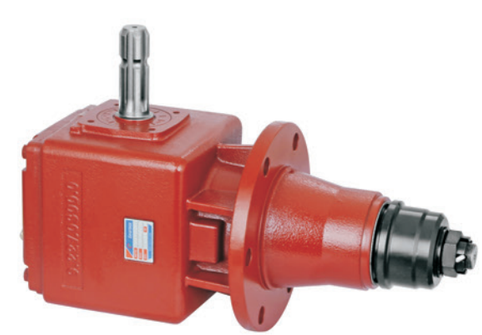

9.227.821


PRODUCT PARAMETERS	
ITEM	9.227.821
Ratio	1:1.83 / 1:1.44
Teeth	12/22 / 16/23
Module	6.5 / 6.0
Power(HP)	80
Input Rate	540 rpm
Input/Output Description	1 3/826 1 3/4 Z20
Weight(N.W)	43.5Kg

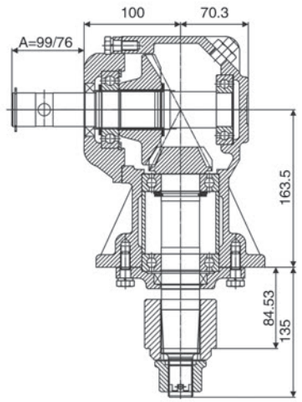



RC31


PRODUCT PARAMETERS	
ITEM	RC31
Ratio	1:1.46 / 1:1.69 / 1:1.93 / 1:2.3
Teeth	22/15 / 22/13 / 29/15 / 28/12
Module	5.08 / 5.0 / 4.0 / 4.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	3/8 Z6 / Optic axis aper spline
Weight(N.W)	21.5Kg

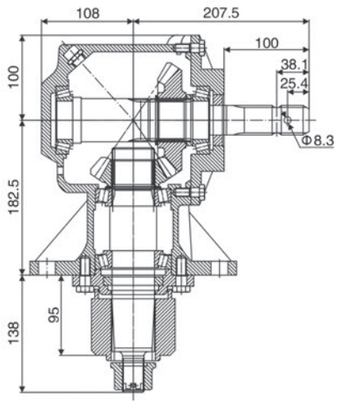




HC-966109


PRODUCT PARAMETERS	
ITEM	HC-966109
Ratio	1:1.46 / 1:1.93
Teeth	13/19 / 14/27
Module	7.0 / 5.5
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / 1 3/4 Z20 Optic ax1 STaper spline
Weight(N.W)	36.5Kg

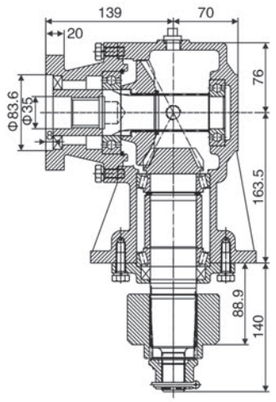

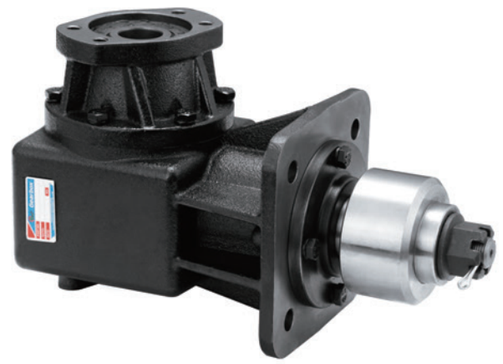

HC-RC51


PRODUCT PARAMETERS	
ITEM	HC-RC51
Ratio	1:1.47 / 1:1.93
Teeth	22/15 / 29/15
Module	5.08 / 4.0
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	Spline / Taper spline
Weight(N.W)	29Kg

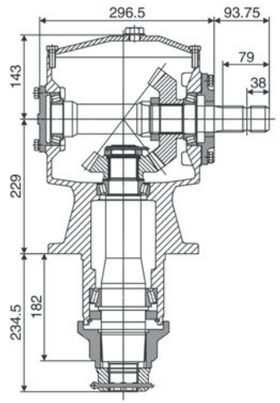




HC-01-768


PRODUCT PARAMETERS	
ITEM	HC-01-768 / HC-01-770
Ratio	1:1.93 / 1:1
Teeth	23/12 / 22/22
Module	8 / 8
Power(HP)	150 / 150
Rated Input	540 rpm
Input/Output Description	1 3/4 Z20 Taper spline
Weight(N.W)	73 Kg

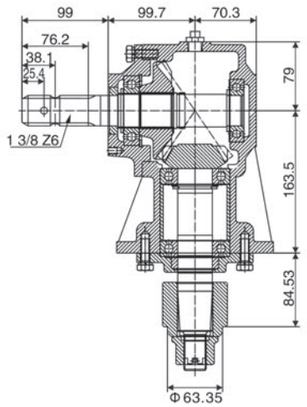


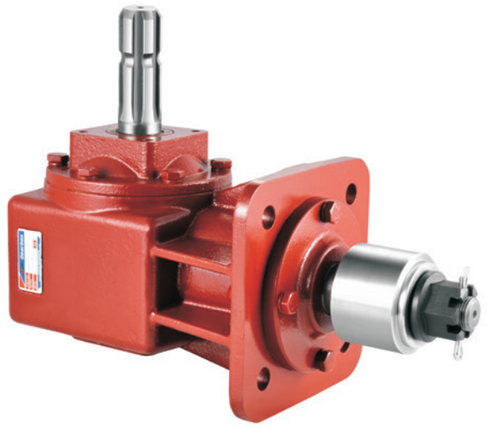

HC-RC33


PRODUCT PARAMETERS	
ITEM	HC-RC33
Ratio	1:93 / 1:1.69 / 1:1.47
Teeth	15/29 / 13/22 / 15/22
Module	4.0 / 5.0 / 5.08
Power(HP)	30 / 30 / 30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	26 Kg

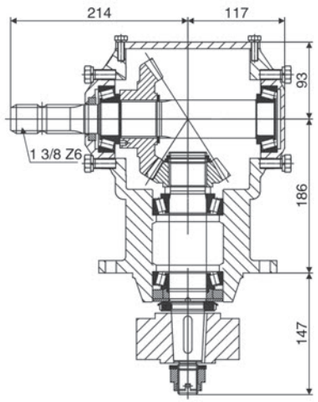

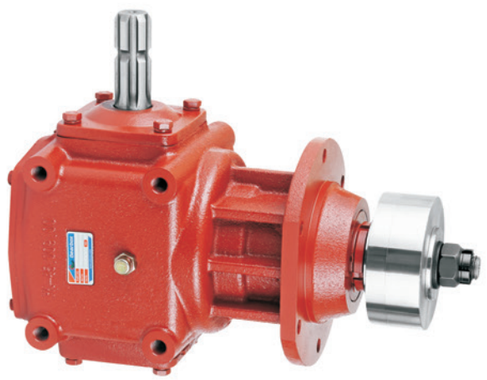

HC-PK45. 009. 00


PRODUCT PARAMETERS	
ITEM	HC-PK45. 009. 00
Ratio	1:1.56
Teeth	25/16
Module	5.75
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	37Kg

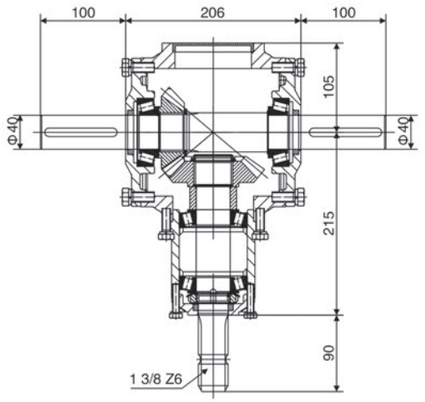



HC-0545-00


PRODUCT PARAMETERS	
ITEM	HC-0545-00
Ratio	1:1.2
Teeth	19/16
Module	6.0
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	31Kg

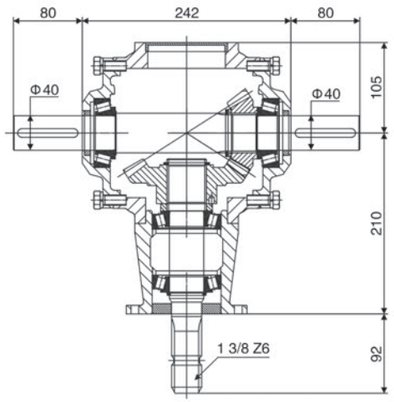



HC-PK45-006

PRODUCT PARAMETERS	
ITEM	HC-PK45-006
Ratio	1:1.56
Teeth	25/16
Module	5.75
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	32Kg

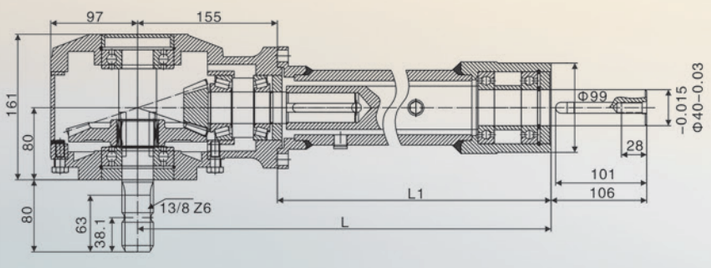



HC-9.311-JCG


PRODUCT PARAMETERS	
ITEM	HC-9.311-JCG
Ratio	1:3
Teeth	36/12
Module	4.35
Power(HP)	50
Rated Input	540rpm
Input/Output Description	1 3/8 Z6/ Optic axis /Optic axis
Weight(N.W)	41Kg

length	SERIES													
	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-11	-12	-13	-14
L	375	500	615	670	700	780	810	950	1060	1140	1200	1250	1350	1500
L1	220	345	460	515	545	625	655	795	905	985	1045	1095	1195	1345


FLAIL MOWER
GEARBOX



HC-9.311-06W

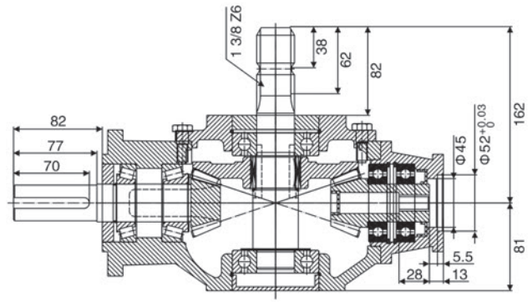


PRODUCT PARAMETERS	
ITEM	HC-9.311-06W
Ratio	1:3
Teeth	36 / 12
Module	4.35
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6/ Optic axis /Optic axis
Weight(N.W)	25Kg

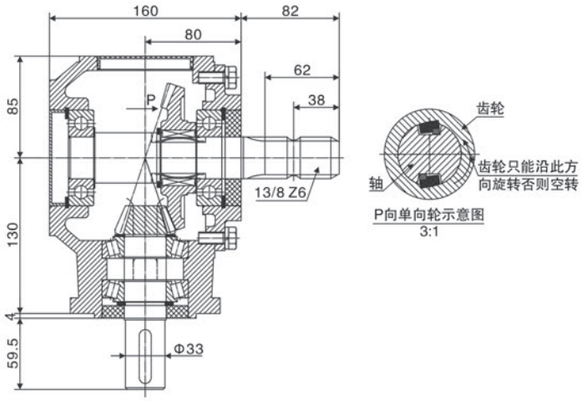



PRODUCT PARAMETERS	
ITEM	HC-9.310
Ratio	1:3
Teeth	12/36
Module	3.45
Power(HP)	30
Rated Input	540rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	18Kg


HC-9.310

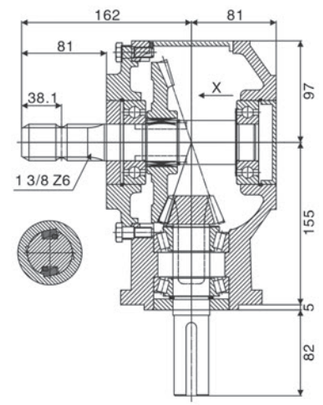



PRODUCT PARAMETERS	
ITEM	HC-9.311
Ratio	1:3
Teeth	36/12
Module	4.35
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis /Optic axis
Weight(N.W)	21Kg


HC-9.311

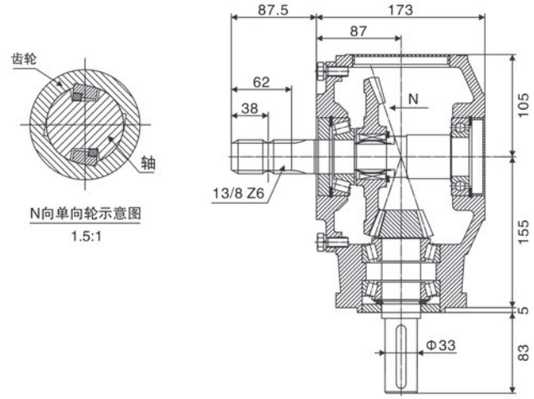



PRODUCT PARAMETERS	
ITEM	HC-9.312
Ratio	1:3
Teeth	12/36
Module	4.58
Power(HP)	62
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	27Kg


HC-9.312

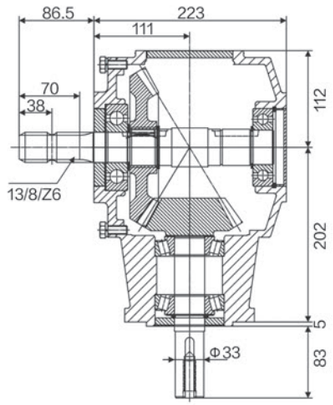



PRODUCT PARAMETERS	
ITEM	HC-75
Ratio	1:3 / 1:2.83 / 1:1.65 / 1:1.6
Teeth	12/36 / 34/12 / 33/20 / 24/15
Module	6.0 / 5.35 / 5.5 / 7.5
Power(HP)	75 / 75 / 100 / 125
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	34Kg


HC-75

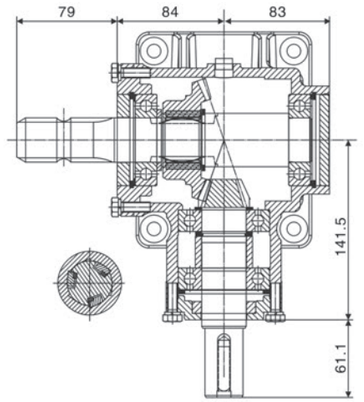



HC30


PRODUCT PARAMETERS	
ITEM	HC30
Ratio	1:2.9
Teeth	32/11
Module	3.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	13.5Kg

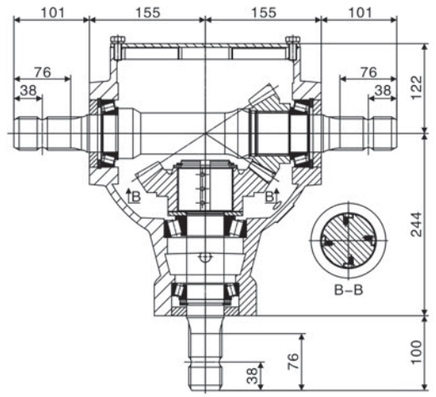



HC–150CT


PRODUCT PARAMETERS	
ITEM	HC–150CT
Ratio	1:2.42 / 1:1.53 / 1:1
Teeth	12/29 / 17/26 / 26/26
Module	7.5/7.0/7.0
Power(HP)	170
Input Rate	540/1000 rpm
Input/Output Description	1 3/4 Z20 / 1 3/4 Z6
Weight(N.W)	80Kg

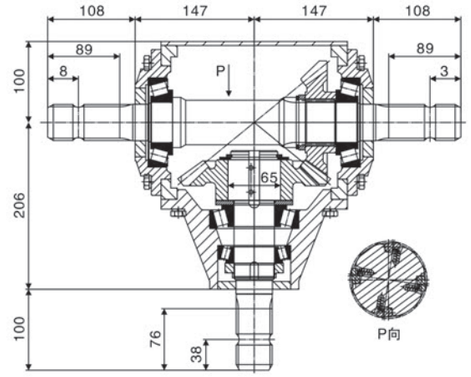



HC–9.269

PRODUCT PARAMETERS	
ITEM	HC–9.269
Ratio	1: 1.22 / 1:1.63
Teeth	22/18 / 16/26
Module	8.25/7.0
Power(HP)	110
Input Rate	540 rpm
Input/Output Description	1 3/4 Z20 / 1 3/4 Z6
Weight(N.W)	55Kg

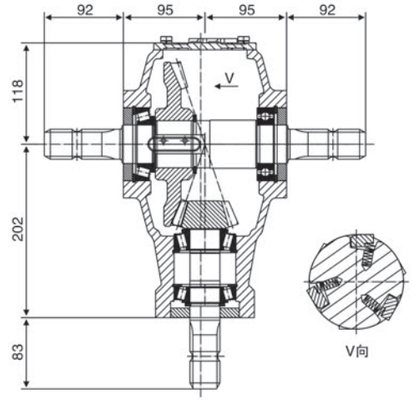



HC9.2071


PRODUCT PARAMETERS	
ITEM	HC–9.2071
Ratio	1:3
Teeth	36/12
Module	5.3
Power(HP)	75
Input Rate	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	28.3Kg

ROTARY TILLER


GEARBOX



HC65HP-186.03

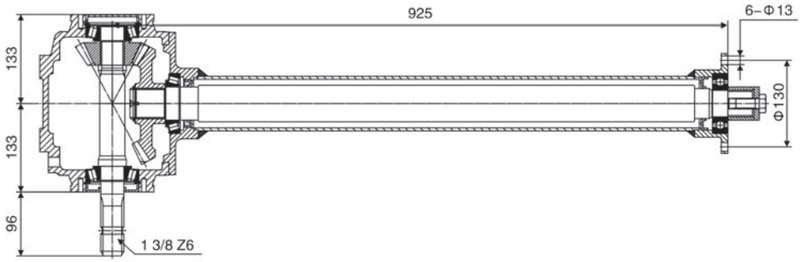


PRODUCT PARAMETERS	
ITEM	HC65HP-186.03
Ratio	1.86:1
Teeth	28/15
Module	6.4
Power(HP)	65
Input Rate	540 rpm
Input/Output Description	1 3/8 Z6/Optic axis
Weight(N.W)	54 Kg

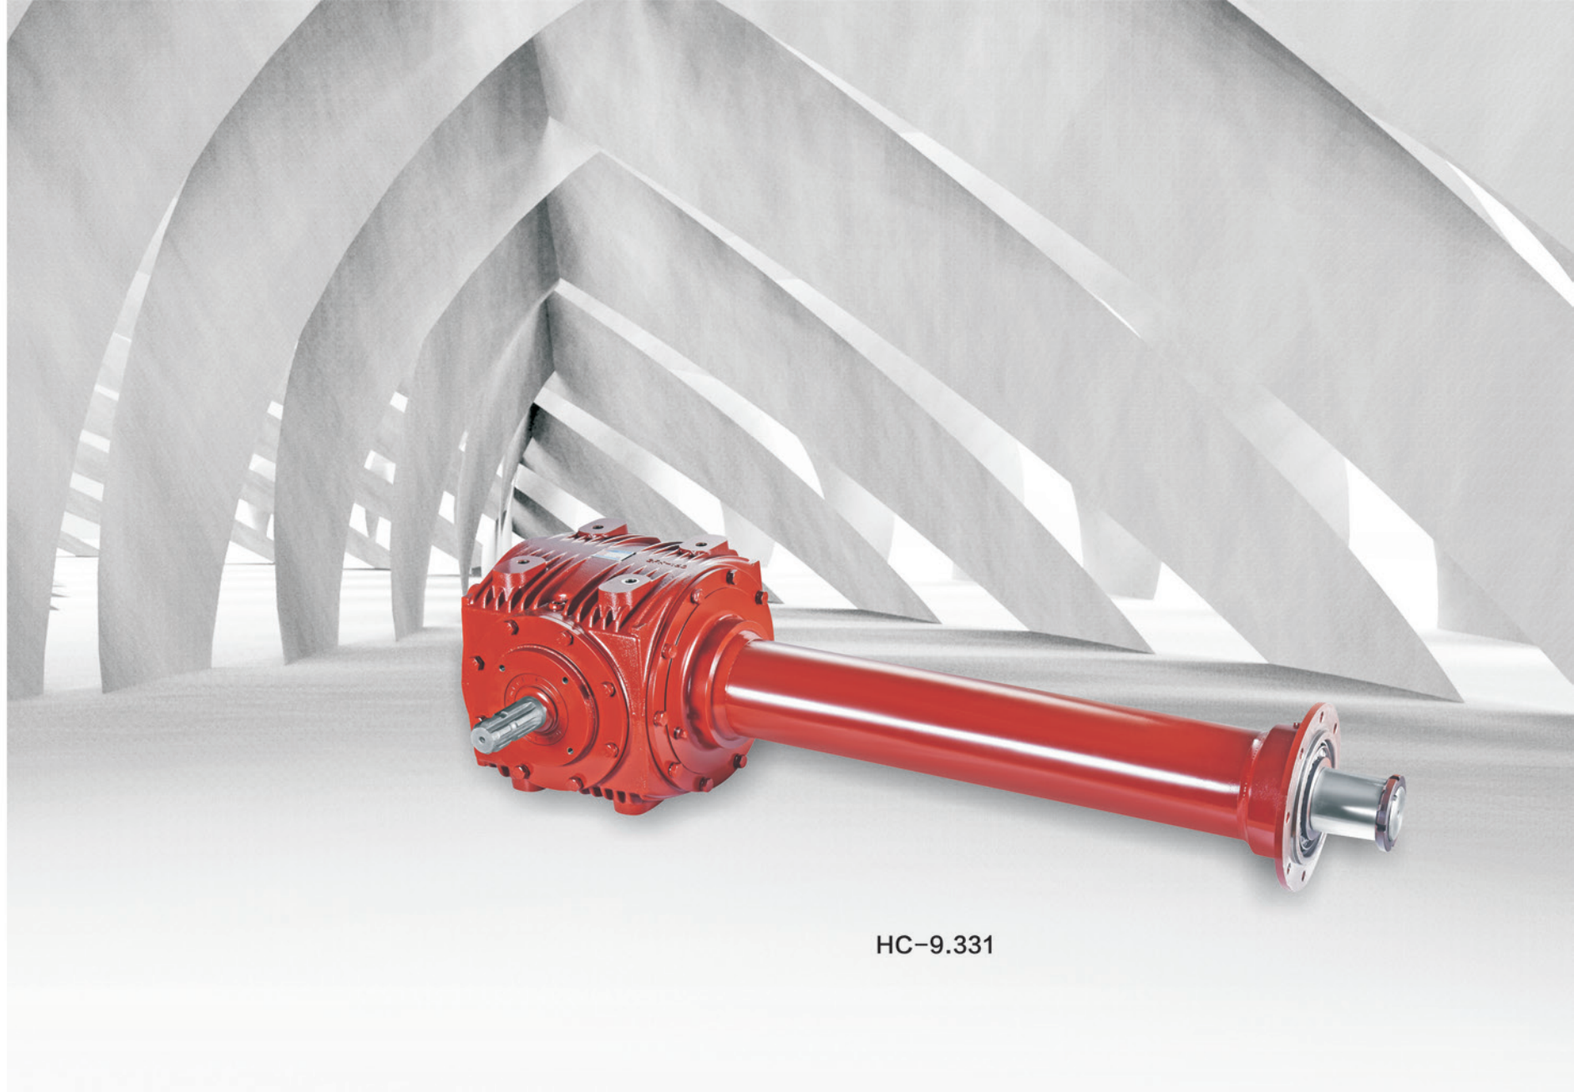


HC-9.331

PRODUCT PARAMETERS	
ITEM	HC-9.331
Ratio	1.94:1
Teeth	33/17
Module	8.0
Power(HP)	250
Input Rate	540 rpm
Input/Output Description	1 3/4 Z6/Optic axis
Weight(N.W)	153 Kg

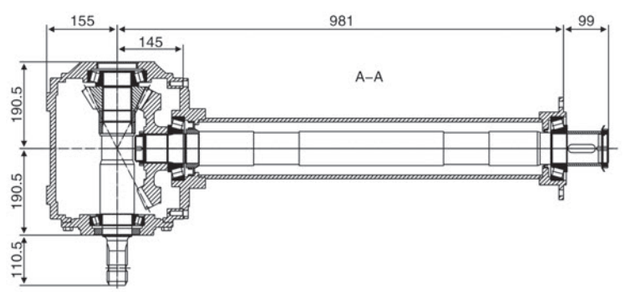



HC-RTM130

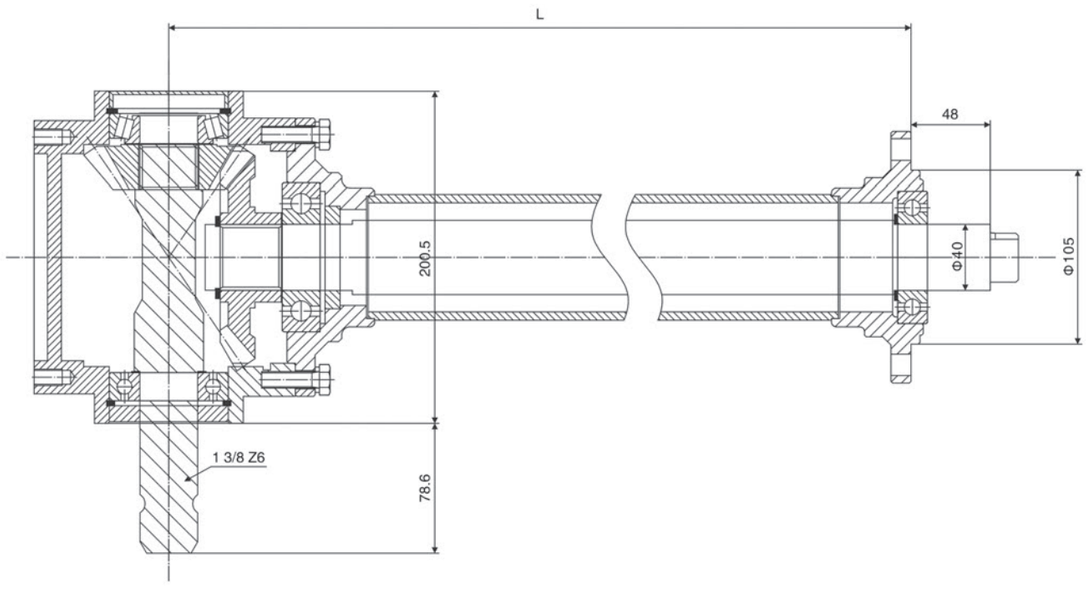



型号	RTM (DR) 105	RTM (DR) 120	RTM (DR) 130	RTM (DR) 135	RTM (DR) 150	RTM (DR)165
长度L	524	599	649	674	749	824
传动比 i	输入转速 rpm	输入功率 HP	输入功率 Kw	Z1	Z2	M	重量 kg
1:1.46	540	45	33	15	22	6.0	38



9. 261.81X. 30

PRODUCT PARAMETERS	
ITEM	9. 261.81X. 30
Ratio	1. 46:1
Teeth	15/22
Module	5.7
Power(HP)	40
Input Rate	540 rpm
Input/Output Description	13/8 Z6
Weight(N.W)	33 Kg

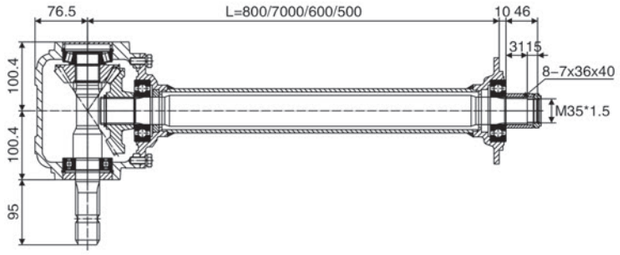


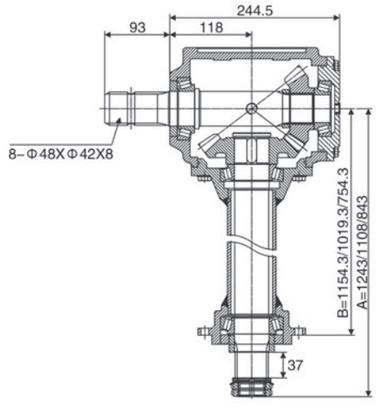

PRODUCT PARAMETERS	
ITEM	HC20100.131.00
Ratio	1.31:1
Teeth	16/21
Module	7.0
Power(HP)	100
Rated Input	600 rpm
Input/Output Description	8-Φ48 x Φ42x8
Weight(N.W)	58Kg




HC20100.131.00

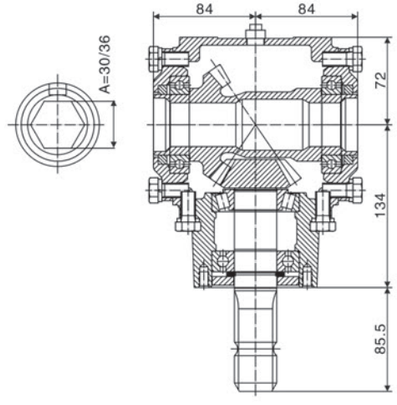


PRODUCT PARAMETERS	
ITEM	HC-9.259
Ratio	1.46:1
Teeth	19/13
Module	5.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	14 Kg




HC-9.259

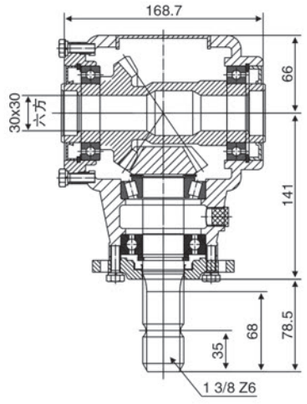


PRODUCT PARAMETERS	
ITEM	1GQR-125-011
Ratio	1.46:1
Teeth	13/19
Module	5.0
Power(HP)	30
Input Rate	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	12. 5Kg

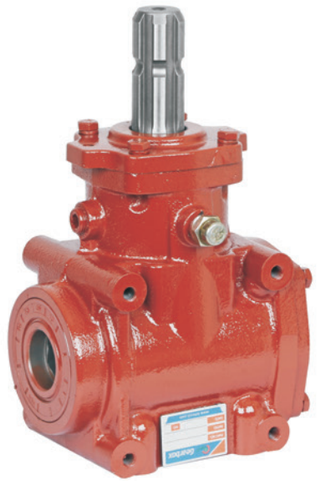


1GQR-125-011

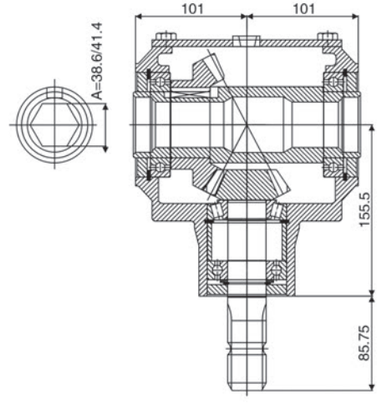

PRODUCT PARAMETERS	
ITEM	HC-01-672
Ratio	1.92:1 / 1.47:1
Teeth	23/12 / 22/15
Module	5.5 / 5.65
Power(HP)	40
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	18.5 Kg

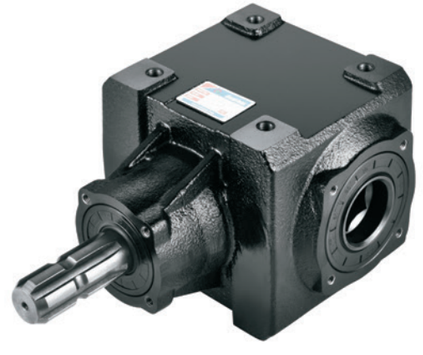


HC-01-672

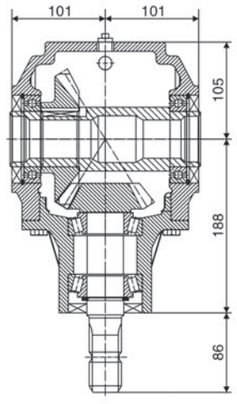

PRODUCT PARAMETERS	
ITEM	B21501 / 9. 278
Ratio	1.92:1 / 1.6:1 / 1:1
Teeth	15/29 / 13/21 / 16/16
Module	5.0/7.0/7.0
Power(HP)	50
Input Rate	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	25.5 Kg




B21501 / 9. 278

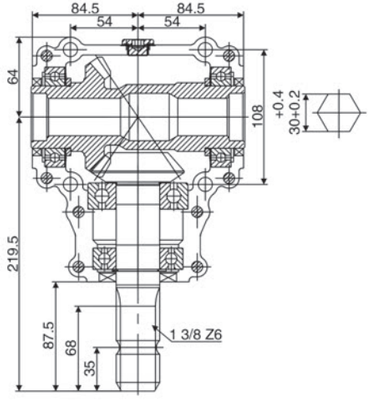



HC-01-674


PRODUCT PARAMETERS	
ITEM	HC-01-674
Ratio	1.46:1
Teeth	19/13
Module	5
Power(HP)	23
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	7. 2Kg

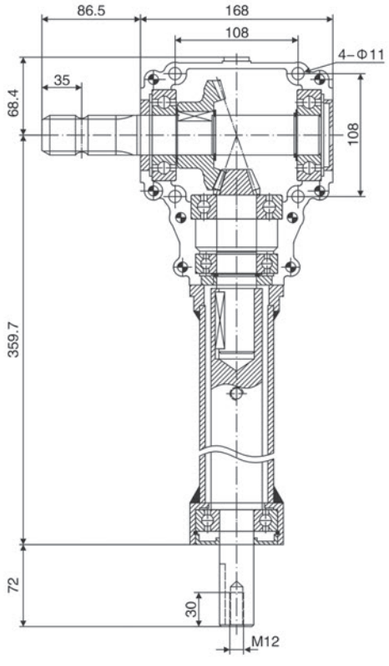




HCAM281-874


PRODUCT PARAMETERS	
ITEM	HCAM281-874
Ratio	1:2.91
Teeth	32/11
Module	3.0
Power(HP)	13
Rated Input	540 rpm
Input/Output Description	1 3/8 26
Weight(N.W)	19 Kg

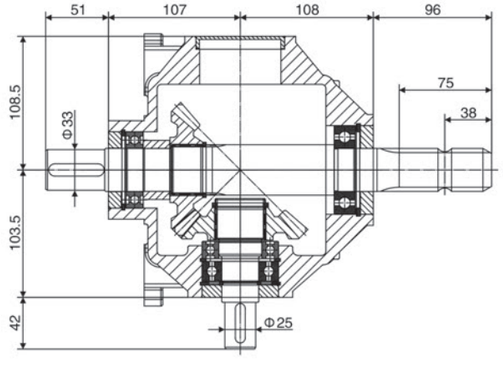

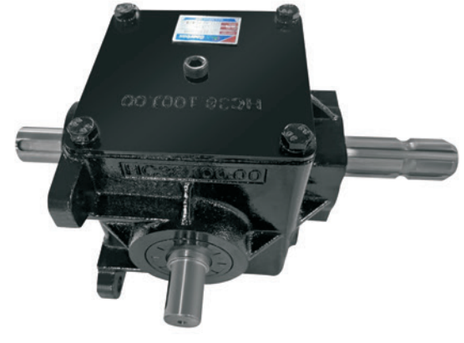

HC38.100

PRODUCT PARAMETERS	
ITEM	HC38.100
Ratio	1:1
Teeth	23/23
Module	4.5
Power(HP)	38
Input Rate	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	17Kg

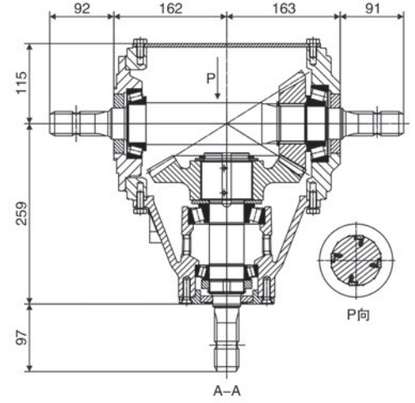




HC-T152

PRODUCT PARAMETERS	
ITEM	HC-T152
Ratio	1:2.19 / 1:1.6
Teeth	35/16 / 20/32
Module	6.25 / 7.0
Power(HP)	250
Input Rate	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	76 Kg


FERTILIZER SPREADER

GEARBOX

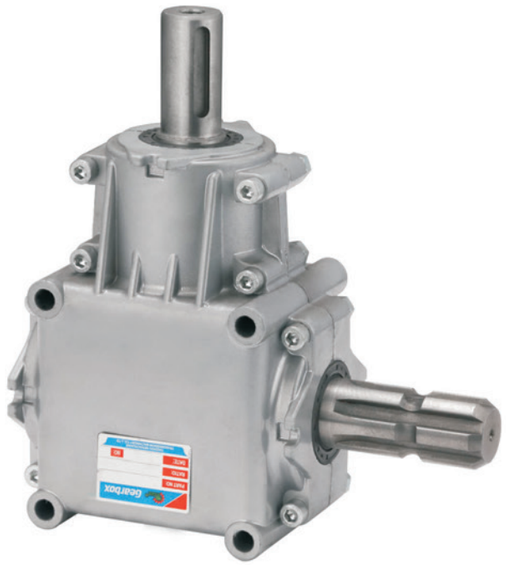


HC-RV022 (X)




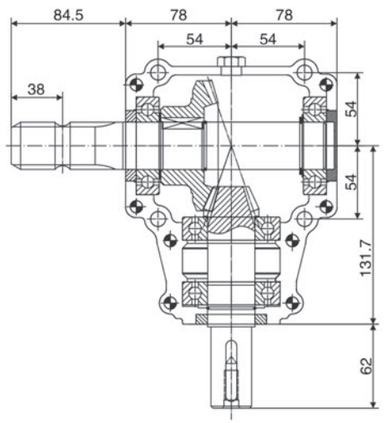


PRODUCT PARAMETERS	
ITEM	HC-RV022 (X)
Ratio	1:1 / 1.46:1 / 1:2.91
Teeth	19/19 / 19/13 / 32/11
Module	4.5 / 5.0 / 3.0
Power(HP)	15
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	7Kg

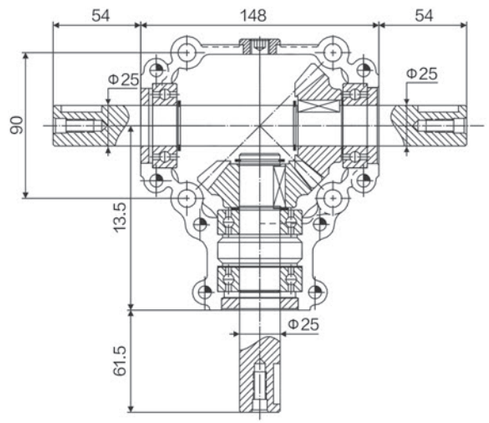


PRODUCT PARAMETERS	
ITEM	HC-RV010
Ratio	1:1 / 1:1.35 / 1:1.9 / 3.3:1
Teeth	16/16 / 17/23 / 10/19 / 10/33
Module	4.5 / 3.5 / 4.5 / 2.5
Power(HP)	15 / 13 / 15 / 3
Rated Input	450 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	4Kg

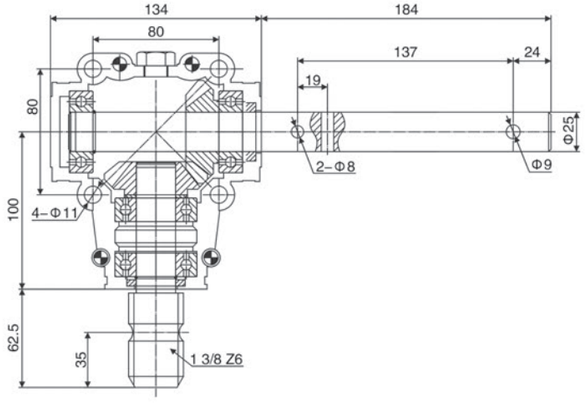

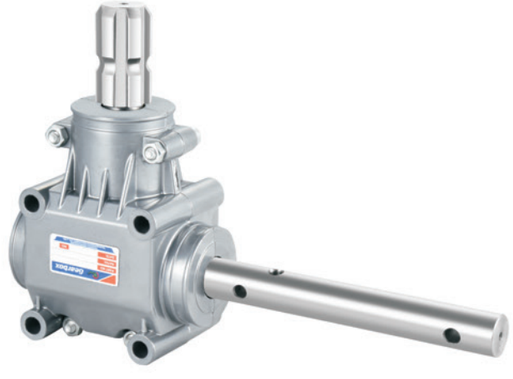

HC-RV012


PRODUCT PARAMETERS	
ITEM	HC-RV012
Ratio	1:1
Teeth	15/15
Module	4.5
Power(HP)	10
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	4Kg

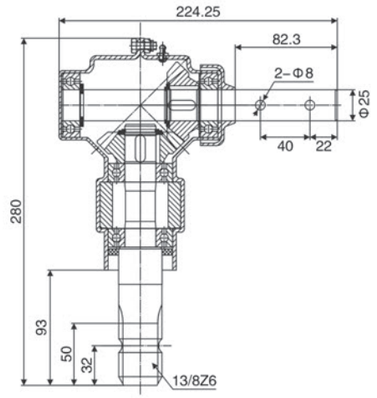




HC-01-229


PRODUCT PARAMETERS	
ITEM	HC-01-229
Ratio	1:1
Teeth	16/16
Module	4.5
Power(HP)	15
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Φ25 Optic axis
Weight(N.W)	4.6Kg

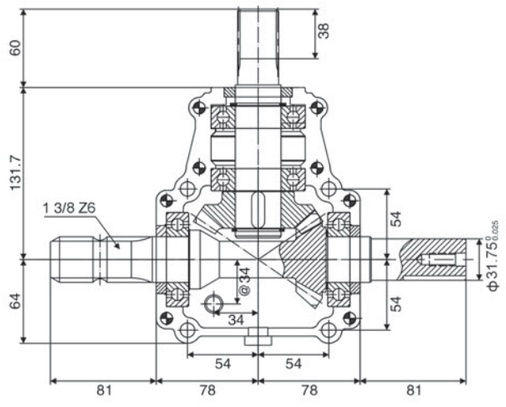

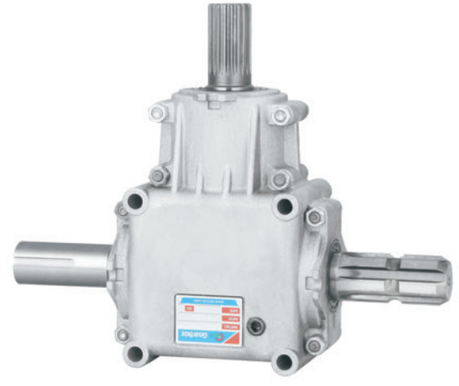

9. 281


PRODUCT PARAMETERS	
ITEM	9. 281
Ratio	1.46:1 / 2.91:1 / 1:1.84
Teeth	13/19 / 11/32 / 13/24
Module	5.0 / 3.0 / 4.0
Power(HP)	25 / 15 / 20
Input Rate	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	7 Kg

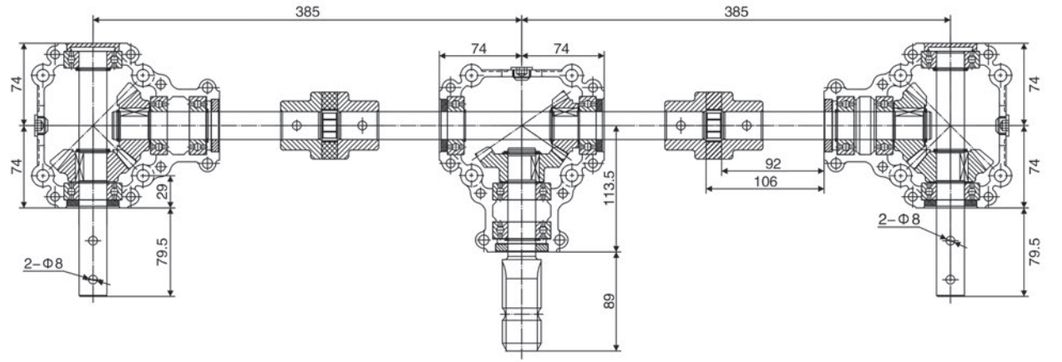



SLX-14375

PRODUCT PARAMETERS	
ITEM	SLX-14375
Ratio	1:1.44
Teeth	23/16
Module	3.5
Power(HP)	15
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Φ25
Weight(N.W)	17 Kg

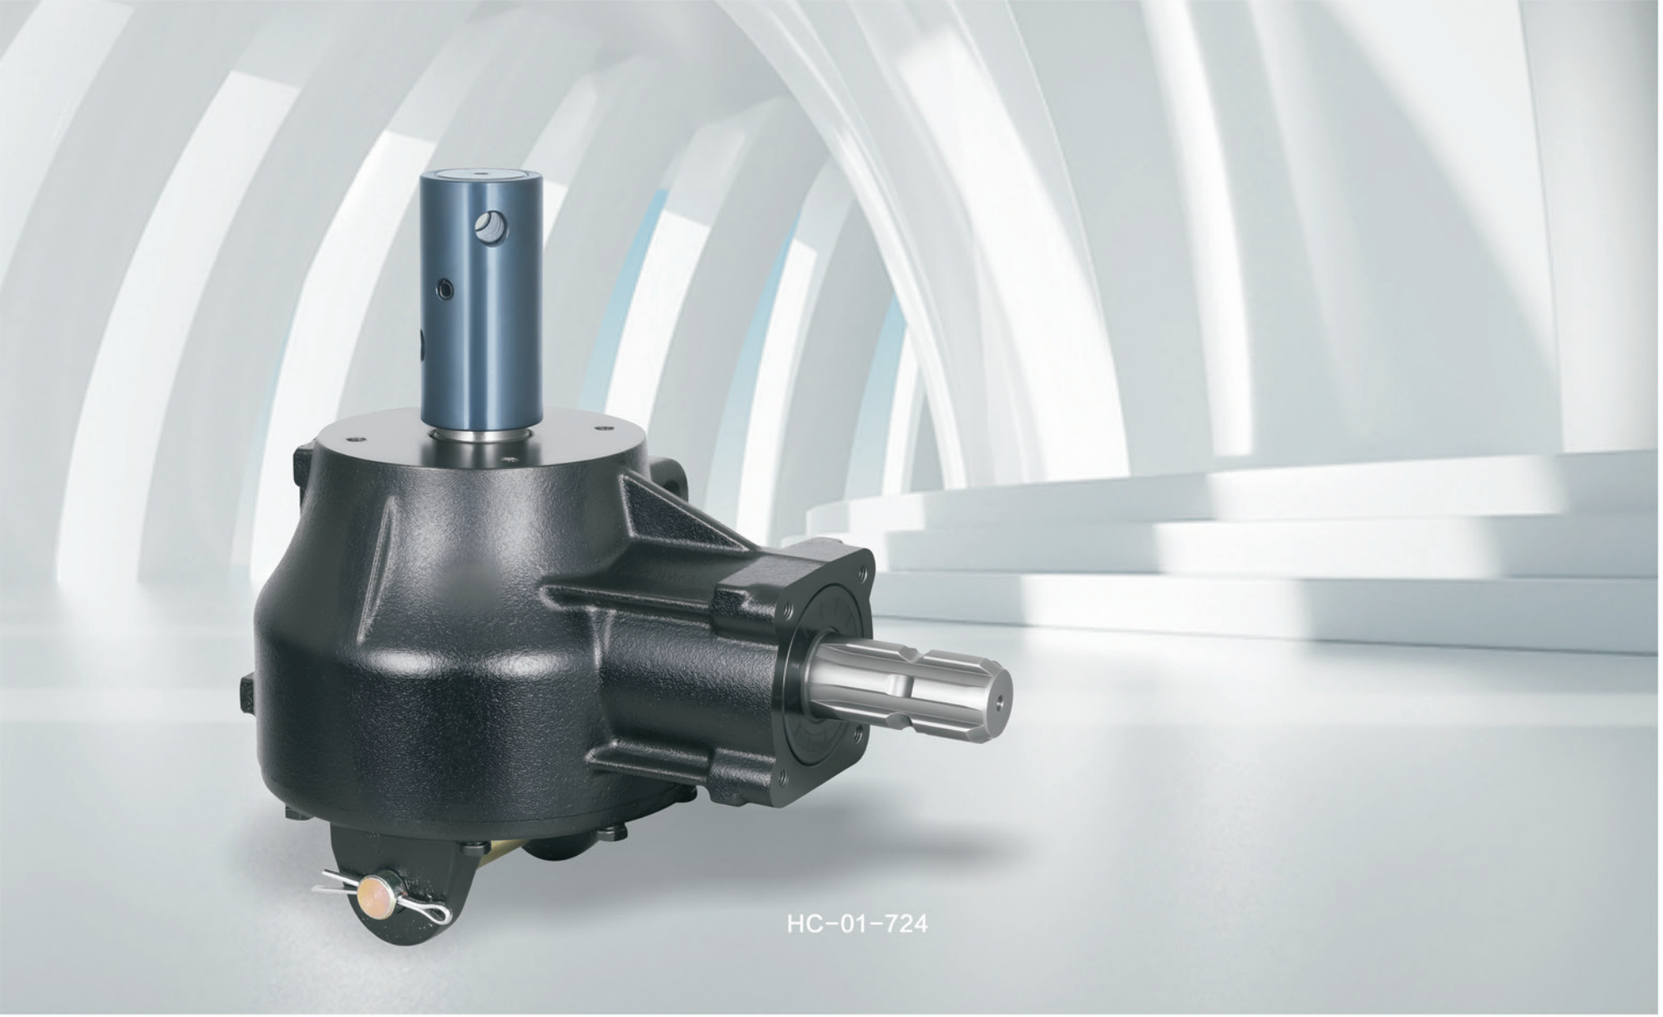


HC-01-724


POST HOLE DIGGER GEARBOX




HC-GT40U

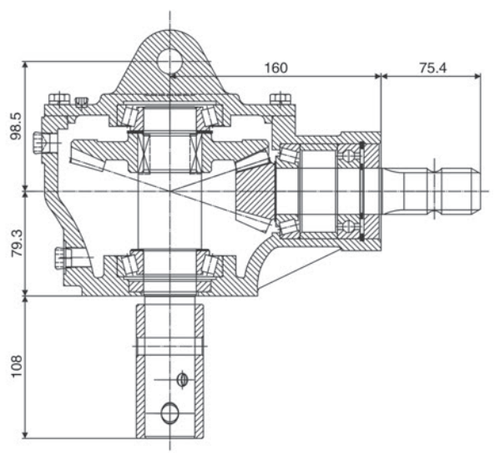

PRODUCT PARAMETERS	
ITEM	HC-01-724
Ratio	3:1
Teeth	10/30
Module	5.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	19Kg

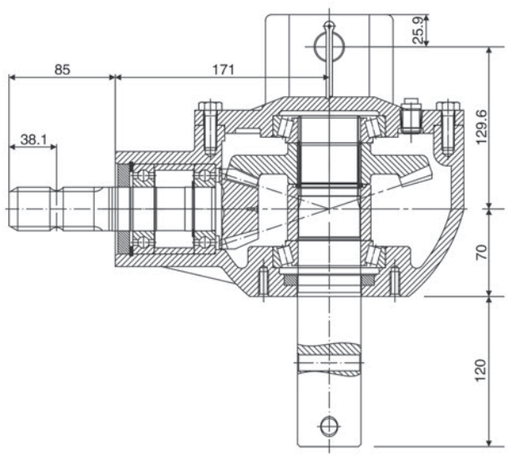


PRODUCT PARAMETERS	
ITEM	HC-GT40U
Ratio	3:1
Teeth	33/11
Module	5.0
Power(HP)	45
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 Optic axis
Weight(N.W)	28 Kg

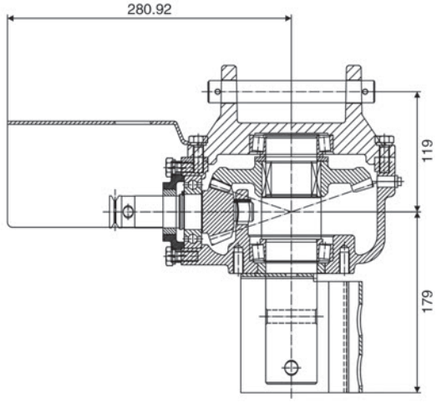



HC-650PHD


PRODUCT PARAMETERS	
ITEM	HC-650PHD
Ratio	2.92:1
Teeth	13/38
Module	4.25
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	Optic axis
Weight(N.W)	21.8 Kg

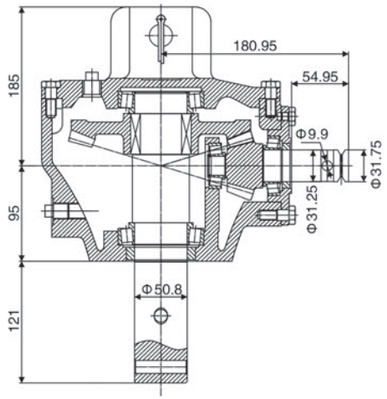



HC-01-725


PRODUCT PARAMETERS	
ITEM	HC-01-725
Ratio	3.18:1
Teeth	11/35
Module	5.08
Power(HP)	40
Rated Input	540 rpm
Input/Output Description	Optic axis
Weight(N.W)	28Kg

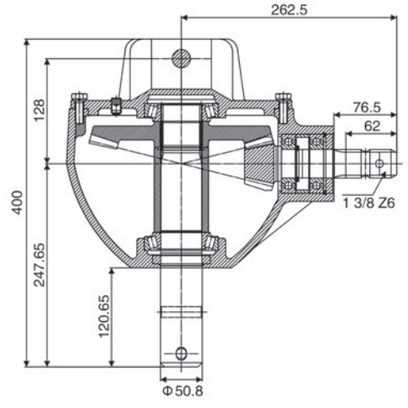




HC-01-084

PRODUCT PARAMETERS	
ITEM	HC-01-084
Ratio	4:1
Teeth	11/44
Module	5.0
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	44 Kg

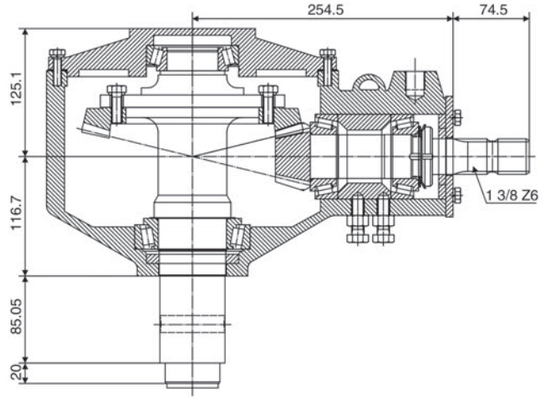

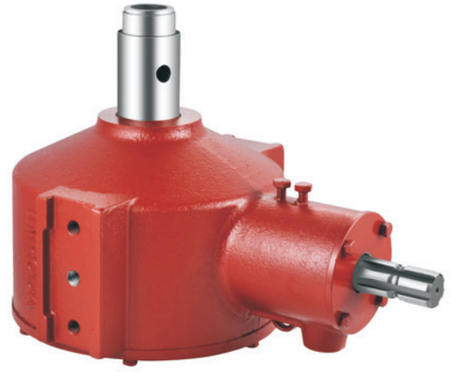

HC-2300058


PRODUCT PARAMETERS	
ITEM	HC-2300058
Ratio	4.08:1
Teeth	12/49
Module	4.5
Power(HP)	50
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / Optic axis
Weight(N.W)	59 Kg

LAWN MOWER


GEARBOX




HC-BGB9

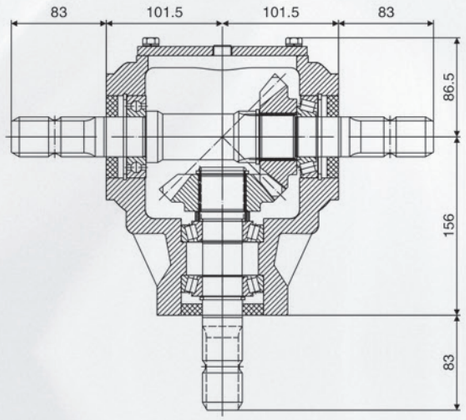


PRODUCT PARAMETERS	
ITEM	HC-BGB9
Ratio	1:1 / 1:1.35 / 1:1.46 / 1:2
Teeth	16/16 / 23/17 / 22/15 / 15/30
Module	6.35 / 5.0 / 5.0 / 3.5
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / 1 3/8 Z6 Optic axis
Weight(N.W)	23 Kg

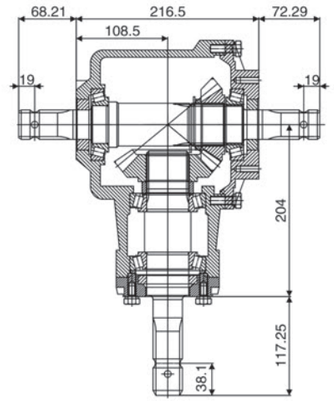

PRODUCT PARAMETERS	
ITEM	HC-RC61T
Ratio	1:1 / 1:1.21 / 1:1.46 / 1:1. 93
Teeth	16/16 / 17/14 / 19/13 / 27/14
Module	7.0 / 7.0 / 7.0 / 5.5
Power(HP)	60
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / 1 3/8 Z6
Weight(N.W)	33.5 Kg

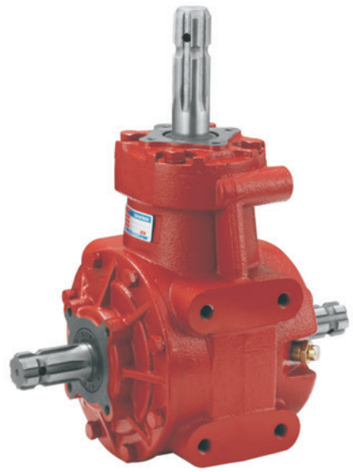


HC-RC61T

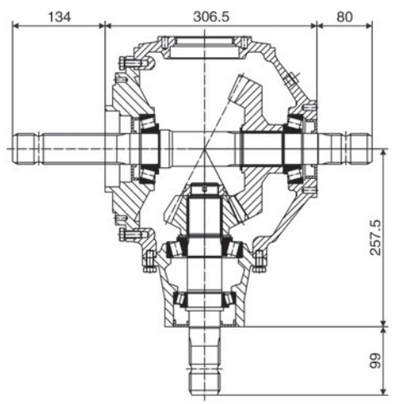

PRODUCT PARAMETERS	
ITEM	HC-T301
Ratio	1.93:1
Teeth	15/29
Module	7.3
Power(HP)	105
Rated Input	540 rpm
Input/Output Description	1 3/4 Z6
Weight(N.W)	62 Kg




HC-T301

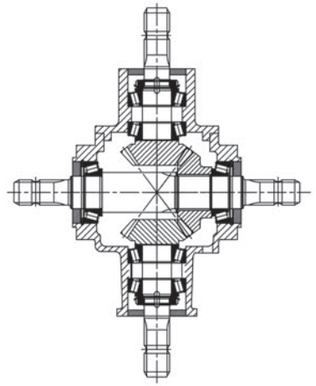



HC-BZJ60-133


PRODUCT PARAMETERS	
ITEM	HC-BZJ60-133
Ratio	1.33:1
Teeth	15/20
Module	6.0
Power(HP)	70
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	31 Kg

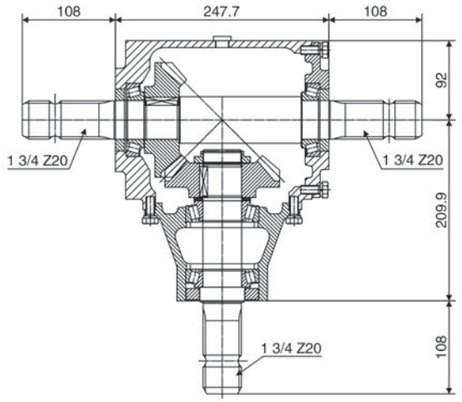




HC-9. 279


PRODUCT PARAMETERS	
ITEM	HC-9. 279
Ratio	1:1.5 / 1:1
Teeth	27/18 / 22/22
Module	5.7 / 6
Power(HP)	100 / 120
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	38Kg

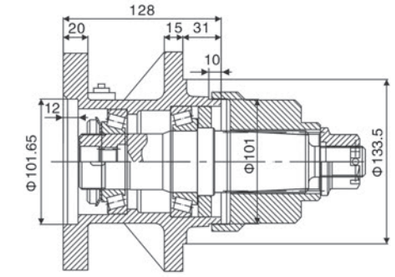

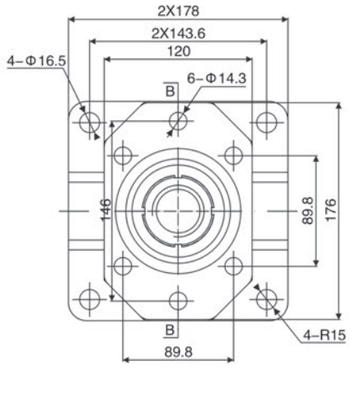





HC-MDH-40

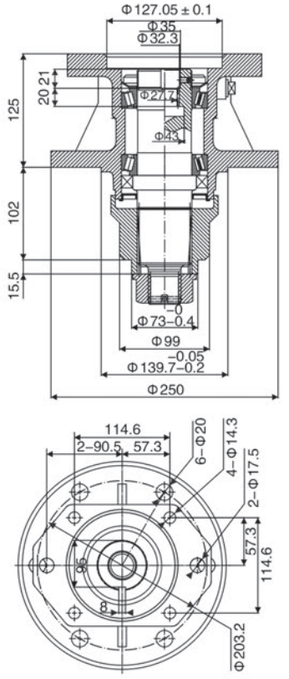



HC-MDH-65







PRODUCT PARAMETERS	
ITEM	HC-2308BZJ-00
Ratio	2.5:1/55.5:1
Input Rate	540 rpm
Input/Output Description	14Hexagonal/16Hexagona
Weight(N.W)	8.0 Kg




HC-2308BZJ-00

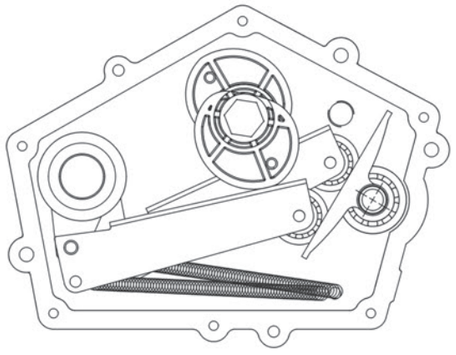

PRODUCT PARAMETERS	
ITEM	HC-01-778
Ratio	0:1 / 3.35:1
Rated Input	540 rpm
Input/Output Description	Φ20
Weight(N.W)	11. 5Kg

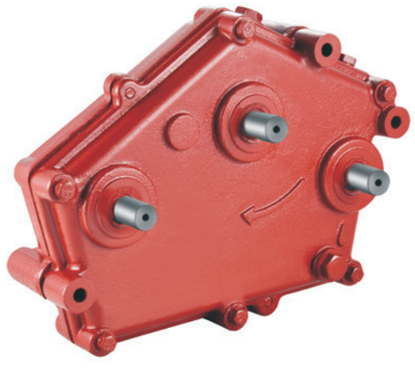


HC-01-778

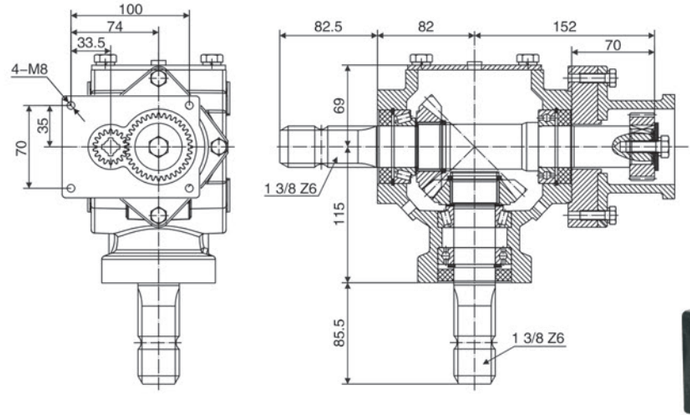

PRODUCT PARAMETERS	
ITEM	HC-20. 100J. 01WW
Ratio	1:1
Teeth	15 / 15
Module	5.4
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	16Kg




HC-20. 100J. 01WW

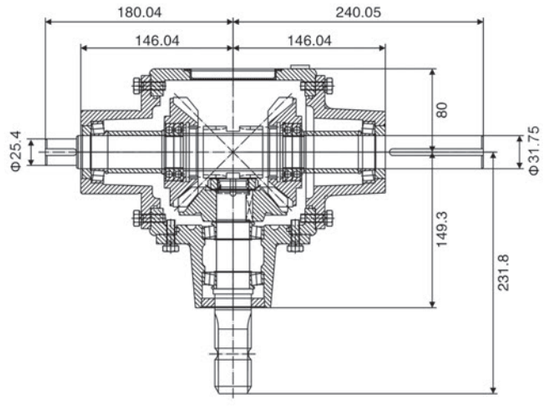


PRODUCT PARAMETERS	
ITEM	H1142
Ratio	1:1
Teeth	17/17
Module	6.35
Power(HP)	40
Input Rate	540 rpm
Input/Output Description	1 3/8 Z6
Weight(N.W)	25. 5Kg




H1142

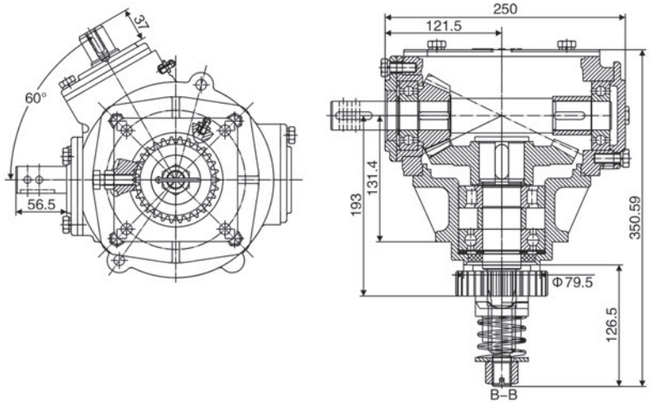

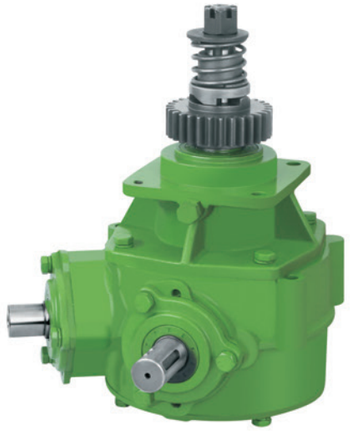

HC–PK005


PRODUCT PARAMETERS	
ITEM	HC–PK005
Ratio	2.05:1
Teeth	17/35
Module	4.5
Power(HP)	
Rated Input	540 rpm
Input/Output Description	Optic axis
Weight(N.W)	31Kg

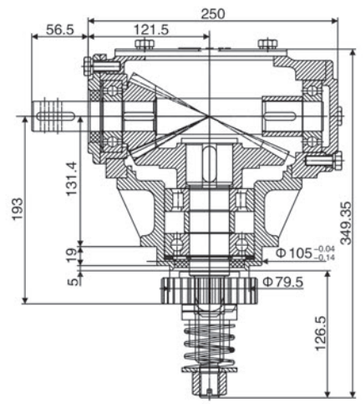



HC–PK004


PRODUCT PARAMETERS	
ITEM	HC–PK004
Ratio	2. 05:1
Teeth	17/35
Module	4.5
Power(HP)	
Rated Input	540 rpm
Input/Output Description	Optic axis
Weight(N.W)	27Kg

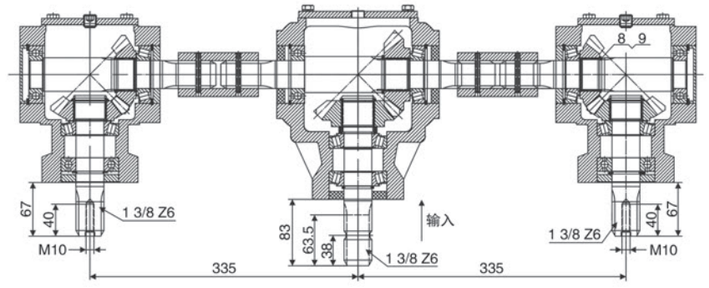



HC–BGB9–BGB8

PRODUCT PARAMETERS	
ITEM	HC–BGB9–BGB8
Ratio	1:1 / 1.67:1
Teeth	22/15 / 15/25
Module	5.08 / 4.0
Power(HP)	30
Rated Input	540 rpm
Input/Output Description	1 3/8 Z6 / 1 3/8 Z6
Weight(N.W)	55Kg

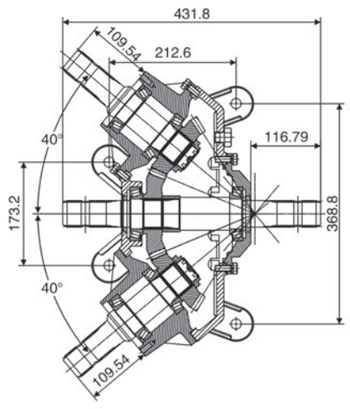




HC–01–661




HC–01–662


PRODUCT PARAMETERS	
ITEM	HC–01–661
Ratio	1:1.3
Teeth	26/20
Module	5.644
Power(HP)	80
Rated Input	540 rpm
Input/Output Description	1 3/4 Z20
Weight(N.W)	57. 5Kg

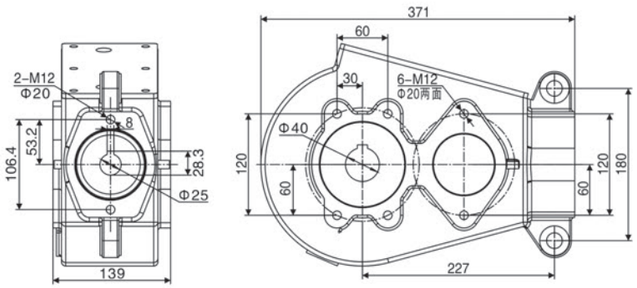


PRODUCT PARAMETERS	
ITEM	HC-D2002
Output torque	2000 N.m
Ratio	16.43:1
Grouping	Level 1 / Level 2
Teeth number 1	31 / 10
Teeth number 2	10 / 53
Module	4.5 / 3.75
Weight(N.W)	43Kg

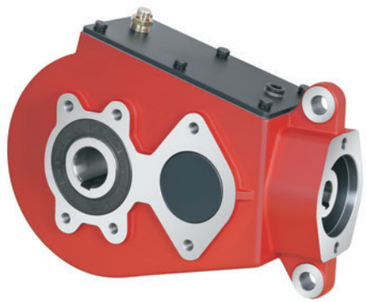

HC-D2002

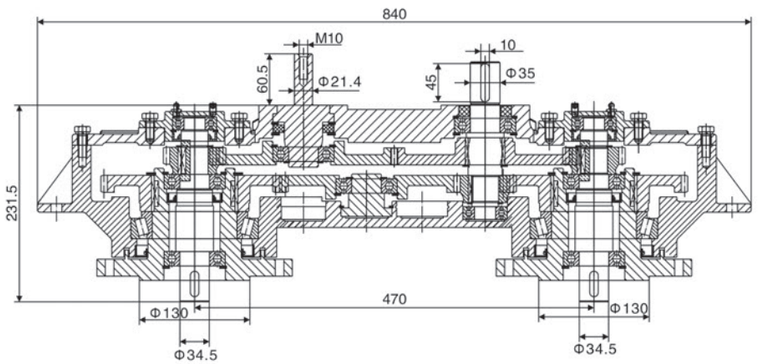

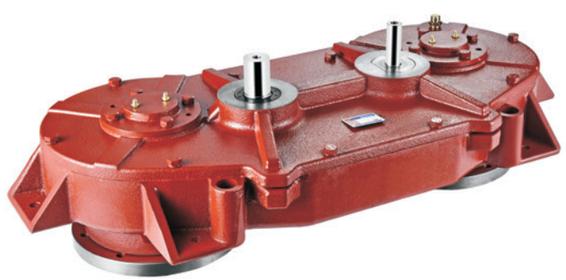

HC-90001







