




VDE INSULATED TORQUE WRENCH

Features

- Tolerance of torque $\pm 3\%$.
- Insulated click type torque wrench with robust 72 teeth ratchet.
- Quick release design.
- Easy torque adjustment with pull-out collar design brings the energy-saving benefit.
- Additional micrometer scale for accurate torque setting.
- Easy-to-read dual scale N-m and Ft-lb below the window.
- Applied to both clockwise and counterclockwise directions.
- Ensure safety on electrical equipment up to 1000V AC or 1500V DC.
- Ideal for use on hybrid and electric vehicles.
- Ergonomic insulated grip provides protection against electric shock.
- Quality meets VDE international standard - IEC 60900.
- Quality meets DIN ISO 6789 & ASME B107.300.2010.

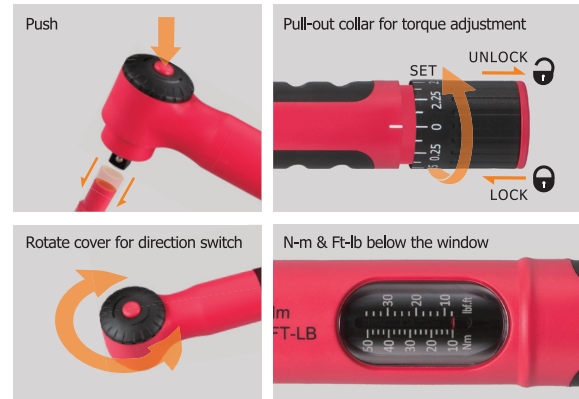

PATENTED



1000V
IEC 60900

Packing: BMC

SPECIFICATIONS

TT NO.	Square drive	Teeth	Nm	lbf.ft	Graduation	g	L(mm)	case/CTN
35276-2F	1/4"	72T	5-25	3.5-18	0.2	430	235	24
35376-1F	3/8"	72T	10-50	7.4-37	0.25	860	364	12
35376-2F			20-100	14.8-74	0.5	860	364	12
35476-1F	1/2"	72T	10-50	7.4-37	0.25	860	364	12
35476-2F			20-100	14.8-74	0.5	860	364	12

