

邢台久伟橡塑制品有限公司

Xingtai Jiu Wei Rubber & Plastic Products Co., Ltd.

企业简介 COMPANY INTRODUCTION

邢台久伟橡塑制品有限公司是一家集专业研制开发生产液压与气动密封件，传动件，耐磨件与缓冲件的专业生产厂家。产品主要以聚氨酯，橡胶，聚四氟，尼龙等原料生产

公司与2012年通过ISO9001质量体系认证。现与国内多家联轴器，工程机械，液压设备生产商配套合作。为客户提可靠的产品和专业的服务。

我们始终遵循“客户满意为目标，技术服务为根本，产品质量为核心，规范管理为手段”的方针，竭诚与海内外各界同仁真诚合作，携手共进，共创辉煌。

Xingtai Jiu Wei Rubber & Plastic Products Co., Ltd. specialize in researching & developing and manufacturing hydraulic and pneumatic seals, transmission parts, wear-resistant parts and buffer parts, with main products of materials such as Polyurethane, rubber, PTFE and nylon.

The company passed the ISO9001 quality system certification in 2012. Now, it is in supportive cooperation with many domestic manufacturers of coupling, construction machinery, and hydraulic equipment for providing customers with reliable products and professional services.

We have always maintained the principles of “ customer satisfaction as the goal, technical services as the basis, product quality as the core, and management regulation as the means ”. Under honest cooperation with colleagues from all walks of life at home and abroad, we go forward hand in hand, to create a brilliant tomorrow!

耐质特®
JW·NZT

企业文化

客户的满意，我们的希望；客户的希望，我们的追求！
谋求共赢是我们唯一的目标与我们的合作伙伴共进退

Corporate culture

Customer’s satisfaction is our hope; Customer’s hope is our pursuit!
Seeking win-win situation is our only goal and we will advance and retreat together with our partners!



经营理念

争取一个客户不容易，失去一个客户很简单！
品质是企业未来的决战场和永恒的主题！
以客户为关注焦点，并努力超越客户希望！

Operation philosophy

Though difficult to earn a customer, but very easy to lose one!
Quality is the decisive battle field and eternal theme of enterprise in the future!
Focus on customers and work hard to surpass their hopes!

质量管理宗旨

细节管理・从我做起
态度决定一切，细节决定成败！
精心用心・品质永远称心！

Quality control tenet

Detail management: start with me
Attitude decides everything, detail decides success!
Be careful and attentive, quality would always satisfactory!

DHS防尘系列
DHS Dust proof series



用途材质

用途：DHS型是具有防油唇和防尘唇的防尘密封件。
材质：进口优质聚氨酯（TPU/CPU）硬度85A-95A


工作环境

温度：-20℃~+80℃
往复速度：≤1m/s
介质：通用石油基液压油、水、乳化液

Use & Materials

Use: DHS type of dust-proof sealer is with oil proof lip and dust-proof lip.
Material quality: Imported high quality polyurethane (TPU/CPU) , hardness of 85A-95A
Working environment
Temperature:-20℃~+80℃
Reciprocating speed:≤1m/s
Media: General petroleum based hydraulic oil, water and emulsion






耐质特® JW·NZT 邢台久伟橡塑制品有限公司 Xingtai Jiu Wei Rubber & Plastic Products Co., Ltd.

DKBI.DKI,GBK骨架防尘系列
DKBI.DKI,GBK Skeleton dust-proof series















耐质特® JW·NZT 邢台久伟橡塑制品有限公司 Xingtai Jiu Wei Rubber & Plastic Products Co., Ltd.

IDU系列
IDU series



用途材质

用途：IDU型轴用密封圈是一种有两道密封唇口且外径处为紧配合的唇形密封，由于两道唇口之间有额外的润滑剂，故大大防止了摩擦和磨损在有些情况下，这种密封甚至可以代替价格昂贵的串联装置。
材质：进口优质聚氨酯（TPU/CPU）硬度85A-95A/NBR丁腈橡胶/FKM氟胶

工作环境

温度：TPU:-20℃~+80℃
NBR:-30℃~+100℃
FKM:-10℃~+200℃
介质：液压油（矿物油基）
压力：≤32Mpa

标准展示

标准：沟槽及产品尺寸、公差等符合JB/ZQ4265-86标准

Use & Materials

Use: IDU type of sealing ring for shaft is with two sealing lips and lip seal with tight fit at outer diameter. The extra lubricant between the two lips greatly prevented friction and wear. In some cases,such seals can even replace expensive serial devices.
Material quality: Imported high quality polyurethane (TPU/CPU) , hardness of 85A-95A/NBR acrylonitrile butadiene rubber /FKM fluoro rubber
Working environment
Temperature:TPU:-20℃~+80℃
NBR:-30℃~+100℃
FKM:-10℃~+200℃
Media: Hydraulic oil (mineral oil based)
Pressure:≤32Mpa
Standard display
Standard: Groove and product size, tolerance and so on conform to JB/ZQ4265-86 standard





耐质特® JW·NZT 邢台久伟橡塑制品有限公司 Xingtai Jiu Wei Rubber & Plastic Products Co., Ltd.

ODU系列
ODU series



用途材质

用途：ODU型是适合中国机械设备市场使用的活塞专用密封件，沟槽设计可采用中国标准的JB/ZQ4264
材质：进口优质聚氨酯（TPU/CPU）硬度85A-95A/NBR丁腈橡胶/FKM氟胶

工作环境

温度：-40℃~+80℃
往复速度：≤0.5m/s
介质：液压油（矿物油基）
压力：≤32Mpa

标准展示

标准：沟槽及产品尺寸、公差等符合JB/ZQ4265

Use & Materials

Use: ODU type special seal for piston is applicable for use in machinery and equipment market in China, with groove design adopting Chinese standard JB/ZQ4264
Material quality: Imported high quality polyurethane (TPU/CPU) , hardness of 85A-95A/NBR acrylonitrile butadiene rubber /FKM fluoro rubber
Working environment
Temperature:-40℃~+80℃
Reciprocating speed:≤0.5m/s
Media: Hydraulic oil (mineral oil based)
Pressure:≤32Mpa
Standard display
Standard: Groove and product size, tolerance and so on conform to JB /ZQ4265 standard





UHS系列
UHS series



用途材质

用途：UHS型活塞杆密封圈是具有较小的截面的U形圈，用于快速压紧沟槽。
材质：进口优质聚氨酯（TPU/CPU）硬度85A-95A

工作环境

温度：-20℃~+80℃
往复速度：≤1m/s
介质：通用石油基液压油、水、乳化液
压力：≤31.5Mpa

Use & Materials

Use: UHS type of piston rod seal ring is with U ring with a smaller cross section, it is used for fast pressing groove tightly.
Material quality: Material quality: Imported high quality polyurethane (TPU/CPU) , hardness of 85A-95A

Working environment

Temperature:-20℃~+80℃
Reciprocating speed:≤1m/s
Media: General petroleum based hydraulic oil, water and emulsion
Pressure:≤31.5Mpa

Standard display

Standard: Groove and product size, tolerance and so on conform to JB /ZQ4265 standard







UN油封系列
UN oil Seal series



用途材质

用途：UN型密封圈是单向作用的密封元件，在液压缸中，主要用于活塞杆密封，在很多种应用场合，特别是在行走机械、汽车、林业和采矿机械中，在恶劣的工作条件下，具有良好的机械特性。
材质：进口优质聚氨酯（TPU/CPU）硬度85A-95A

工作环境

温度：-30℃~+80℃
介质：石油基液压油、乳化液、不适用于环保安全液压油（生物油）
压力：≤32Mpa

Use & Materials

Use: UN type of seal ring is the single acting seal component. In the hydraulic cylinder, it is mainly used in piston rod seal. In many applications, especially in walking machinery, automobiles, forestry and mining machinery, under bad working conditions, it has good mechanical properties
Material quality: Material quality: Imported high quality polyurethane (TPU/CPU) , hardness of 85A-95A

Working environment

Temperature:-30℃~+80℃
Media: Petroleum based hydraulic oil, emulsion, not applicable for envir-onmental protection safety hydraulic oil (bio oil)
Pressure:≤32Mpa







KDAS组合密封
KDAS combined seal

结构解析
JIEGOUJIAXI





用途材质

用途：KDAS型密封圈是由一个异性密封圈两个挡圈和两个导向支撑环组成的五件组合压紧式活塞密封圈，有着优异密封性能，适用于密封两侧承压，适用于迅速增能的活塞，密封过程中不会被挤入径向密封间隙，并可防止密封元件扭曲。
材质：
密封元件：NBR
挡圈：尼龙PA或者增强聚甲醛POM
导向环：尼龙PA或者增强聚甲醛POM

工作环境

温度：-30℃~+100℃
往复速度：≤0.5m/s
介质：矿物油、空气
压力：≤25Mpa

标准展示

标示：KDAS-85X65

Use & Materials

Use: KDAS type of seal ring is the combined compression piston sealing ring comprised of a special sealing ring, two retaining rings and two guide supporting rings. With excellent sealing performance, it is applicable for sealing pressure-bearing on both ends and pistol with rapidly increasing energy. During sealing, it will not be squeezed into the radial seal clearance, and it can prevent sealing component from twisting.
Material quality：NBR
Sealing component:Nylon PA or reinforced POM
Bead flange: Nylon PA or reinforced POM

Working environment

Temperature:-30℃~+100℃
Reciprocating speed:≤0.5m/s
Media:Mineral oil, air
Pressure:≤25Mpa


Standard display

Standard: KDAS-85X65

工作性能
WORK PERFORMANCE

丁腈橡胶（代号NBR）工作温度：30-100摄氏度主要特点：耐油、耐热、耐磨性好。广泛用于制作密封制品，但不适用于磷酸系列液压油及含极度性添加剂的齿轮油。
硅胶材质（代号PMQ或VMQ）工作温度：60-200摄氏度主要特点：耐热、耐寒性好。压缩永久变形小，但机械强度低。
氟胶（代号FKM）工作温度：20-200摄氏度主要特点：耐热、耐酸碱及其它化学药品；耐油（包括磷酸酯系列液压油）适用于所有润滑油，汽油、液压油、合成油。
三元乙丙橡胶（代号EPDM或EPM）工作温度：50-150摄氏度主要特点：耐气候性好，在空气中耐老化、耐油性一般，可耐氟里昂及多种制冷剂。
聚四氟乙烯（代号PTFE）工作温度：200-260摄氏度主要特点：化学稳定性好，耐热、耐寒性好、耐油、水、汽、化学药品等各种介质；机械强度较高，耐高压、耐磨性好；摩擦系数极低，自润滑性好。
聚氨酯（代号PU）工作温度：35-100摄氏度主要特点：良好的机械性能，优异的耐磨、耐油性能，但工作温度不高。
Working temperature for Acrylonitrile butadiene rubber (code NBR): 30-100 degree Celsius Main feature: Oil resistance, heat resistance, good wear resistance. It is widely used in sealing products, but it is not applicable for phosphoric acid series hydraulic oil, and gear oils containing extreme additives.
Working temperature for silicone material (code PMQ or VMQ): 60-200 degree Celsius Main features: Good heat resistance and cold resistance. Small in compression permanent deformation but low in mechanical strength
Working temperature for Fluoro glue (code FKM): 20-200 degree Celsius: Main features: Heat resistance, acid and alkali resistance and other chemicals resistance: such as oil resistant (including phosphate series hydraulic fluids), applicable for all lubricating oils, gasoline, hydraulic oil and synthetic oil.
Working temperature for EPDM (code EPDM or EPM): 50-150 degree Celsius. Main features: Good weather resistance, common aging resistance in air and oil resistance, resistant to freon and multiple refrigerants
Working temperature for polytetrafluoroethylene (code PTFE): 200-260 degree Celsius.Main features: Good stability, good heat resistance, cold resistance, resistant to other media such as oil, water, steam and chemicals; High mechanical strength, high resistance to high pressure and wear. With very low friction coefficient, good self-lubricating property.
Working temperature for polyurethane (code PU): 35-100 degree Celsius. Main features: Good mechanical properties, excellent wear resistance and oil resistance, but under low working temperature.













GR(XL)星型联轴器梅花垫
GR (XL) star coupling plum cushion





产品用途

本标准适用于各种传动机械联轴器缓冲作用于传动轴的联接。

扭矩：22.4-2500NM

磨耗：<0.05cm³/1.61km

产品硬度：黄色92A 蓝色95A 红色98A

使用温度：-40~100℃

标准来源：德国KTR

Product use：

This products are used for mechanical shaft coupling,As a joint in the transmission shaft.


Torque:22.4~2500NM

Abrasion：<0.05cm³/1.61km


Product hardness:Yellow SHA92、blue SHA95、Red SHA98

Service temperature:-40~100℃

Standard source: German KTR







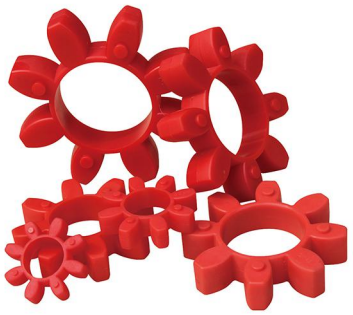

Series No. 序列号	Iterm No. 订货号	Material 材质	Standard Hardness (ShoreA) 标准硬度	D(mm) D	d(mm) d	H(mm) H	H1(mm) H1	D1(mm) D1	Qty of Petal 花瓣数
1	GR-10	TPU	98	19	8	8	10	9	4
2	GR-14	TPU	98	30	10	10	12	13	4
3	GR-19	TPU	98	40	18	12	14	23	6
4	GR-24	TPU	98	55	27	14	16	32	8
5	GR-28	TPU	98	65	30	15	17	35	8
6	GR-38	TPU	98	80	38	18	22	40	8
7	GR-42	TPU	98	95	46	20	24	54	8
8	GR-48	TPU	98	105	51	21	25	60	8
9	GR-55	TPU	98	120	60	22	26	67	8
10	GR-65	TPU	98	135	68	26	30	71	8
11	GR-75	TPU	98	160	80	30	38	71	10
12	GR-90	TPU	98	200	100	34	42	115	10
13	GR-100	CPU/TPU	98	225	113	38	/	130	10
14	GR-110	CPU/TPU	98	250	127	42	/	142	10
15	GR-125	CPU/TPU	98	290	147	46	/	163	10
16	GR-140	CPU/TPU	95	320	165	50	/	185	10
17	GR-160	CPU/TPU	95	370	190	57	/	198	10
18	GR-180	CPU/TPU	95	420	220	64	/	240	12

GS梅花垫
GS plum cushion





GS紧密无齿隙联轴器弹性体
GS Backlash free tight coupling elastomer

用途材质

本标准适用于各种传动机械联轴器缓冲作用于传动轴的联接。

扭矩：22.4-2500NM

磨耗：<0.05cm³/1.61km

产品硬度：黄色92A 蓝色95A 红色98A

使用温度：-40~100℃

标准来源：德国KTR

Product use：

This products are used for mechanical shaft coupling,As a joint in the transmission shaft.


Torque:22.4~2500NM

Abrasion：<0.05cm³/1.61km

Product hardness:YellowSHA92 blue SHA95、Red SHA98

Service temperature:-40~100℃

Standard source: German KTR





Serial NO	外径（A） Outside diameter	内径（D） Inside diameter	厚度（F） Thickness	厚度（G） Thickness	瓣数 Lamella QTY
GS-7	14	–	7.4	6	4
GS-10	20	–	10	8	4
GS-14	30	–	12	10	4
GS-19	40	18	14.5	12	6
GS-24	54	26	15.2	14	8
GS-28	65	30	19	15	8
GS-38	80	38	22	18	8
GS-42	95	46	24	20	8
GS-48	104	51	25.5	20.5	8
GS-55	120	60	27	22	8
GS-65	135	68	32	26	8
GS-75	161	81	37	30	10
GS-90	199	100	42	34	10





H型弹性块
H type of elastic block



产品用途

本标准适用于各种传动机械联轴器缓冲作用于传动轴的联接。

扭矩：22.4-2500NM
磨耗：<0.05cm³/1.61km
产品硬度：90A±5
使用温度：-20~80℃
标准来源：德国KTR


Product use:


The standard is applicable for all kinds of transmission machinery coupling buffer acting on the transmission shaft connection.

Torque:22.4-2500NM
Abrasion：<0.05cm³/1.61km
Product hardness:90A±5
Service temperature:-20~80℃
Standard source: German KTR



L爪式联轴器梅花垫
H type of elastic block









型号 Coupling TYPE	扭矩Torque 最大Max	扭矩Torque 最小Min	最高回转速 Xax Rpm	D	L	L1	L2	d 最大Max	d 最小Min	惯性矩 Gd kgf em
L-35	0.05	0.15	6000	16.1	20.5	6.5	7.5	4	8	0.1
L-50	0.15	0.45	4500	27	43.2	15.5	12.2	6	16	1
L-70	0.3	0.9	3600	35	49.2	18.5	12.2	6	20	3.3
L-75	0.5	1.5	3600	45	54.4	21	12.4	8	26	9.1
L-90	0.8	2.4	3000	54	55	21	13	10	28	15
L-95	1	3	3000	55	61	24	13	10	28	17
L-99	2	6	3000	66	73	30	18	12	36	42
L-100	2.5	7.5	3000	66	88	35	18	12	36	43
L-110	5	15	2500	85	110	44	22	12	48	147
L-150	10	30	2500	96	118.5	46	26.5	16	46	258
L-190	15	45	2000	115	138.5	56	26.5	16	58	628
L-225	20	60	2000	127	152.5	63.5	26.5	18	60	1685
L-276	25	75	2000	157	200	79	41	22	73	5265



MT/ML联轴器梅花垫
MT/ML coupling plum cushion





产品用途

用于各种重型机械联轴器缓冲作用于传动轴的链接

材　质：聚氨酯（TPU）
扭　矩：22.4-2500NM
磨　耗：< 0.05cm3 / 1.61km
标准来源：GB/T5272-85
产品硬度：90A ±2° 95A ±2°
配套联轴器代号：ML 、MLL


Product use:

Product use: Used as a link for all kinds of heavy mechanical coupling buffer acting on the transmission shaft
Material quality: Polyurethane (TPU)
Torque：22.4-2500NM
Abrasion：< 0.05cm3 / 1.61km
Standard source：GB/T5272-85
Product hardness：90A ±2° 95A ±2°
Supporting coupling code：ML 、MLL







Serial NO	D	D1	d3	D9	d7	d6	h	瓣数 Lamella QTY
MT-1	48	30	19	23	16	18	12	4
MT-2	68	48	28	34	18	20	18	6
MT-3	82	60	34	42	20	22	18	6
MT-4	100	72	42	51	25	28	20	6
MT-5	122	90	52	62	29	32	25	6
MT-6	140	104	64	74	33	36	30	6
MT-7	166	130	90	100	33	36	30	8
MT-8	196	156	100	112	37	40	35	8
MT-9A	220	176	115	130	42	45	35	10
MT-9	225	180	115	130	42	45	35	10
MT-10A	250	200	140	154	46	50	45	10
MT-10	255	205	140	154	46	50	45	10
MT-11	295	245	170	187	46	50	50	10
MT-12	356	300	215	235	51	56	55	12
MT-13	391	335	250	275	51	56	55	12

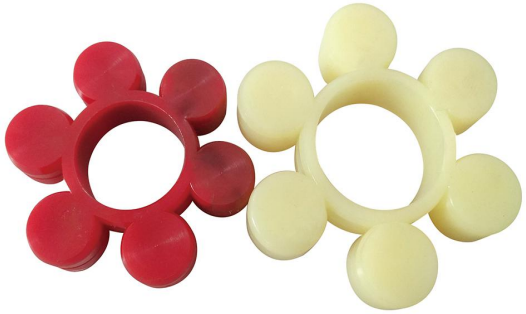

T型六角块
T-type hexagonal blocks







产品用途

材　质：优质国产聚氨酯（TPU）
产品用途：用于各种工业水泵传动链接缓冲作用
使用温度：-30~+80
磨　耗：< 0.05cm3 / 1.61km
颜　色：白色/黄色
产品硬度：90A ±2

Product use:
Material quality: High quality domestically produced polyurethane (TPU)
Product use: Used for various industrial pumps drive linking with buffering effect
Service temperature: -30~+80
Abrasion：< 0.05cm3 / 1.61km
Color:White/Yellow
Product hardness：90A ±2

Serial NO	D外径 Outside diameter	d内径 Inside diameter	H厚度 Thickness	瓣数 Lamella QTY
T-75	75	31	15	6
T-80	80	40	15	6
T-85	85	40	17	6
T-90	90	40	18	6
T-95	95	42	20	6
T-100	100	52	22	6
T-105	105	52	22	6
T-110	110	52	22	6
T-120	120	60	25	6
T-125	125	62	25	6
T-130	130	65	25	6
T-135	135	68	25	6
T-140	140	68	26	6
T-145	145	70	27	6
T-150	150	80	28	6
T-155	155	80	28	8
T-165	165	82	30	6
T-170	170	83	30	6
T-175	175	85	30	6
T-180	180	90	30	6
T-200	200	110	35	8
T-210	210	100	38	6

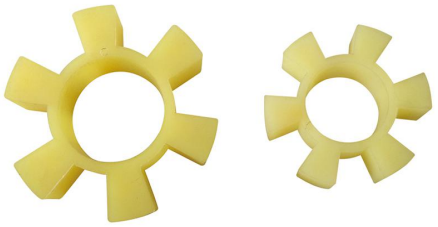


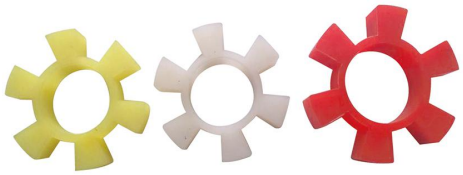

LT/ZT/FL柱销联轴器弹性套
Elastic sleeve for LT/ZT/FL pin coupling

Serial NO	规格 SPECIFICATION		
	d	D	L
LT-8	8	16	10
LT-10	10	19	15
LT-12	12	24	28
LT-14	14	26	28
LT-18	18	35	36
LT-24	24	45	44
LT-30	30	56	56
LT-38	38	71	72
LT-45	45	85	88





产品用途

本标准适用于弹性套柱销联轴器用以及各种机械设备起减振缓冲作用。
产品硬度：85A ± 5
标准：GB4323-84

Product use
Material quality: Product use: The standard applies to elastic sleeve pin coupling and various mechanical equipment for vibration attenuation and buffering effect.
Product hardness：85A ± 5
Standard source：GB4323-84

四连体弹性套 Four component combined elastic sleeve

Serial NO	d	D	L	Serial NO	d	D	L
ZT-8	8	16	10	ZT-18	8	36	35
ZT-10	10	19	15	ZT-24	24	45	44
ZT-14	14	28	27	ZT-30	30	56	55
ZT-38	38	71	72	ZT-45	45	85	88




弹性圈（分体） Elastic ring (split-ed part)

Serial NO	d	D	L	Serial NO	d	D	L
FT-10	10	20	7	FT-24	24	48	11
FT-12	12	24	7	FT-28	28	56	15
FT-14	14	28	7	FT-30	30	56	15
FT-14	14	29	7	FT-30	30	62	14
FT-18	18	36	9	FT-38	38	71	18
FT-18	18	38	9	FT-45	45	91	22
FT-24	24	45	11	FT-45	45	85	23



HRC梅花垫联轴器缓冲块
HRC Cushion block for coupling of plum cushion







SIZE	MAXBORE		DIMENSIONS								MASS KG
	MM	INS	A	B	E	F	G	C	D	L	
HRC-70	32	11/4	69	60	31	25	18	20	23.5	65	1.2
HRC-90	42	15/8	85	70	32	30.5	22.5	19.5	23.5	69.5	1.4
HRC-110	55	21/8	112	110	45	45	29	18.5	26.5	82	6
HRC-130	60	23/8	130	105	50	53	36	18	26.5	89	6.55
HRC-150	70	23/4	150	115	62	60	40	23.5	33.5	107	8.53
HRC-180	80	31/8	180	125	77	73	49	34.5	46.5	142	19.92
HRC-230	100	4″	225	155	99	85.5	59.5	39.5	52.5	164.5	31.2
HRC-280	130	5″	275	206	119	105.5	74.5	51	66.5	207.5	60






FALK福克联轴器弹性块梅花垫缓冲垫


FLENDER BIPEX BWN 202弹性联轴器减震胶块


MHCC芯型联轴器缓冲块


MT八角垫


NM联轴器缓冲胶


米型梅花垫


分体梅花垫


液力耦合器梅花垫


NL尼龙内齿套


NL联轴器



ML联轴器



XL联轴器


传动联轴器缓冲件
Transmission coupling buffer
























橡胶O型圈系列
Rubber O- ring series

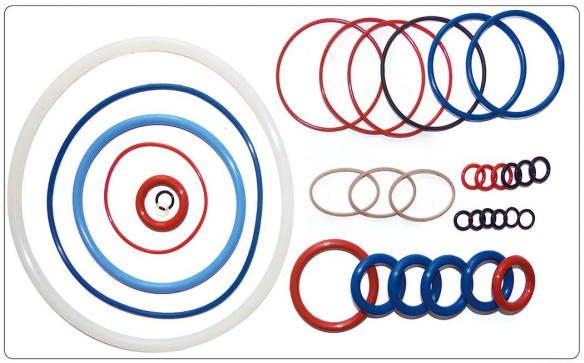

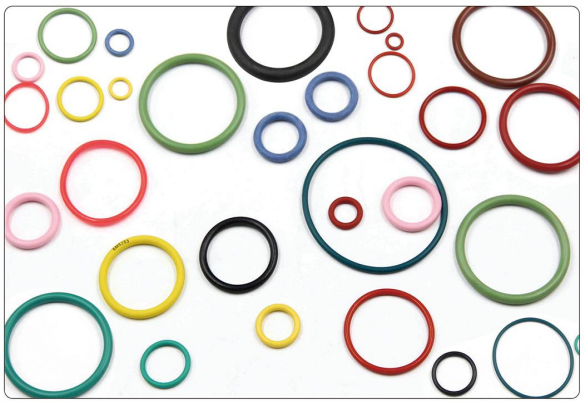

邢台久伟橡塑制品有限公司 Xingtai Jiu Wei Rubber & Plastic Products Co., Ltd. 耐质特® JW·NZT


液压气动密封件系列
Hydraulic pneumatic seals series





耐质特® JW·NZT 邢台久伟橡塑制品有限公司 Xingtai Jiu Wei Rubber & Plastic Products Co., Ltd.

聚四氟制品
PTFE products

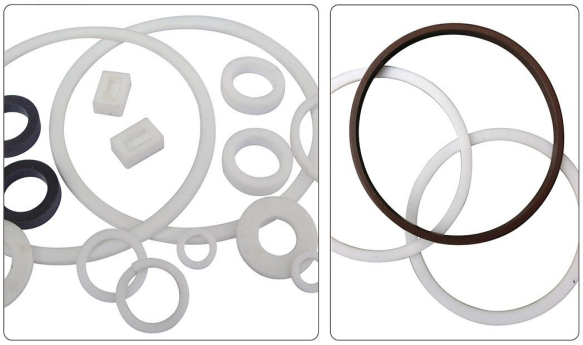





邢台久伟橡塑制品有限公司 Xingtai Jiu Wei Rubber & Plastic Products Co., Ltd. 耐质特® JW·NZT

格莱圈 斯特封
Glyd ring HBTS



液压油缸修理包
hydraulic jack repair kit







自卸车油缸修理包
Dump truck cylinder repair kit




挖机油封修理包
Digging machine oil seal repair kit

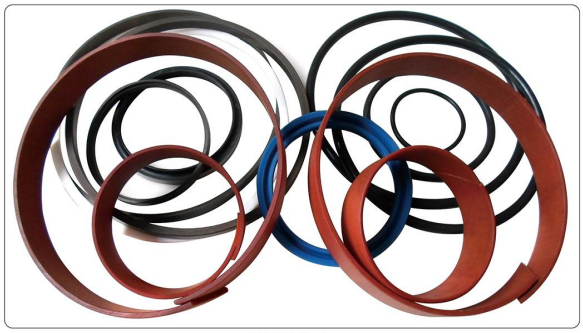

导向环 Guide ring



聚氨酯O型圈 Polyurethane O ring

杂件
Miscellaneous parts



挂车拉杆套
Trailer pull rod sleeve



挖机连接胶
Digging machine oil seal repair kit



橡胶杂件
Rubber Components



聚氨酯（PU）杂件
Polyurethane (PU) Components

聚氨酯（PU）包胶轮
Polyurethane (PU) wrapped rubber wheel

特性表示 / 物性表示	抗臭氧性	耐候性	耐热性	耐化学药品性	耐油性	密水性	耐寒性	耐磨损性	抗变形性	耐酸性	耐碱性	张力强度	耐水蒸气性	抗燃性
丁腈橡胶 NBR.(N)	△	○	120℃	○△	◎	○	-40℃	○	◎◎	△	○	◎◎	×	×
氢化丁腈橡胶 HNBR.(H)	◎	◎	150℃	○	◎	○	-40℃	◎◎	○	○	◎	◎	○△	×
三元乙丙橡胶 EPDM.(E)	◎	◎	150℃	◎	×	◎	-50℃	○	◎◎	◎◎	◎	◎◎	◎◎	×
氯丁橡胶 CR.(C)	◎◎	○	120℃	○△	○△	○	-40℃	○	△	◎◎	◎△	△	◎◎	○
氟硅橡胶 FVMQ.(F)	◎	◎	175℃	◎	◎	△	-60℃	×	◎	◎	△	○	○△	△×
氟橡胶 FFKM.(K)	◎	◎	320℃	◎	◎	◎	-20℃	◎	◎	◎	◎	◎◎	◎	◎
聚四氟乙烯 PTFE.(T)	◎	◎	280℃	◎	◎	◎	-100℃	◎	×	◎	◎	△×	○	◎
聚氨酯 PU.(U)	◎	○	90℃	◎	◎	◎	-40℃	◎	×	×	×	◎	×	△
氯醚橡胶 ECO.(O)	◎	○	135℃	○	○	○	-35℃	○	○	○△	○	◎◎	○△	△×
天然橡胶 NR.(R)	×	×	90℃	×	×	◎	-60℃	◎◎	◎◎	○△	△	◎	×	×
丁苯橡胶 SBR.(B)	×	△	110℃	△	×	○	-40℃	◎◎	◎◎	○△	△	◎	×	×
丁基橡胶 I I R.(I)	○	◎	120℃	○	×	◎	-50℃	○	○	○	◎	○	○△	△×
聚氨酯 ACM.(A)	◎	◎	150℃	×	◎	◎	-25℃	△	△	△×	×	△	×	△×

图标说明：◎特佳 ○佳 △普通 × 差

邢台久伟橡塑制品有限公司

IDU 系列轴用密封圈（聚氨酯）

规格	单价	规格	单价	规格	单价
IDU 10×16×8	3	IDU 95×107×14	15	IDU 210×226×18	63
IDU 12×18×8	3	IDU 100×112×14	15	IDU 215×231×18	65
IDU 14×20×8	3	IDU 105×117×14	18	IDU 220×236×18	65
IDU 16×22×8	3	IDU 105×121×18	18	IDU 225×241×18	68
IDU 16×24×10	3	IDU 110×126×18	20	IDU 230×246×18	70
IDU 18×24×8	3	IDU 110×122×14	20	IDU 235×251×18	75
IDU 18×26×8	3	IDU 115×127×14	22	IDU 240×256×18	80
IDU 18×26×10	3	IDU 115×131×18	22	IDU 245×261×18	85
IDU 20×26×8	3.5	IDU 120×132×14	22	IDU 250×266×18	90
IDU 20×28×10	3.5	IDU 120×136×18	24	IDU 255×271×18	90
IDU 22×28×8	3.5	IDU 125×137×14	25	IDU 260×276×18	100
IDU 22×30×10	3.5	IDU 125×141×18	28	IDU 265×281×18	100
IDU 25×31×8	3.5	IDU 130×142×14	25	IDU 270×286×18	120
IDU 25×33×10	3.5	IDU 130×146×18	28	IDU 275×291×18	120
IDU 28×34×8	3.5	IDU 135×147×14	28	IDU 280×296×18	130
IDU 28×36×10	4	IDU 135×151×18	32	IDU 285×301×18	130
IDU 30×38×10	4	IDU 140×152×14	28	IDU 290×306×18	140
IDU 32×40×10	4	IDU 140×156×18	30	IDU 295×311×18	150
IDU 35×43×10	4	IDU 145×157×14	28	IDU 300×316×18	150
IDU 36×44×10	6	IDU 145×161×18	33	IDU 310×334×24	160
IDU 40×48×10	5	IDU 150×162×14	28	IDU 320×344×24	170
IDU 45×53×10	5	IDU 150×166×18	35	IDU 330×354×24	180
IDU 50×58×10	5	IDU 155×167×14	30	IDU 340×364×24	200
IDU 50×62×14	6	IDU 155×171×18	38	IDU 350×374×24	230
IDU 52×60×10	7	IDU 160×172×14	30	IDU 360×384×24	250
IDU 55×63×10	6	IDU 160×176×18	44	IDU 370×394×24	280
IDU 55×67×14	8	IDU 165×181×18	44	IDU 380×404×24	300
IDU 56×64×10	7	IDU 170×186×18	45	IDU 390×414×24	320
IDU 60×72×14	9	IDU 175×191×18	45	IDU 400×424×24	340
IDU 63×75×14	10	IDU 180×196×18	50	IDU 420×444×24	360
IDU 65×77×14	10	IDU 185×201×18	53	IDU 450×474×24	380
IDU 70×82×14	11	IDU 190×206×18	55	IDU 465×489×24	400
IDU 75×87×14	11	IDU 195×211×18	58	IDU 470×494×24	420
IDU 80×92×14	12	IDU 200×216×18	60	IDU 480×504×24	450
IDU 85×97×14	12	IDU 200×224×24	80	IDU 500×524×24	480
IDU 90×102×14	14	IDU 205×221×18	60		

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

ODU 系列孔用密封圈（聚氨酯）

规格	单价	规格	单价	规格	单价
ODU 16×10×8	3	ODU 120×108×14	20	ODU 250×234×18	75
ODU 18×12×8	3	ODU 125×109×18	24	ODU 255×239×18	75
ODU 20×14×8	3	ODU 125×113×14	22	ODU 260×244×18	80
ODU 22×16×8	3.5	ODU 130×114×18	26	ODU 265×249×18	90
ODU 25×19×8	3.5	ODU 130×118×14	23	ODU 270×254×18	100
ODU 28×22×8	3.5	ODU 135×119×18	25	ODU 275×259×18	110
ODU 30×22×10	4	ODU 135×123×14	23	ODU 280×264×18	110
ODU 32×24×10	4	ODU 140×124×18	30	ODU 285×269×18	120
ODU 35×27×10	4	ODU 140×128×14	25	ODU 290×274×18	120
ODU 36×28×10	4	ODU 145×129×18	30	ODU 295×279×18	130
ODU 40×32×10	4	ODU 145×133×14	25	ODU 300×284×18	130
ODU 45×37×10	4	ODU 150×134×18	30	ODU 310×284×24	150
ODU 50×42×10	5	ODU 150×138×14	26	ODU 320×296×24	180
ODU 55×43×14	7	ODU 155×139×18	32	ODU 325×301×24	190
ODU 55×47×10	5	ODU 155×143×14	36	ODU 330×306×24	190
ODU 56×48×10	6	ODU 160×144×18	40	ODU 340×316×24	200
ODU 56×44×14	7	ODU 160×148×14	30	ODU 350×326×24	210
ODU 60×48×14	9	ODU 165×153×14	40	ODU 360×336×24	210
ODU 63×51×14	9	ODU 165×149×18	40	ODU 370×346×24	220
ODU 65×53×14	9	ODU 170×154×18	40	ODU 380×356×24	220
ODU 70×58×14	9	ODU 175×159×18	40	ODU 390×366×24	240
ODU 75×63×14	10	ODU 180×164×18	45	ODU 400×376×24	260
ODU 80×68×14	12	ODU 185×169×18	46	ODU 420×396×24	280
ODU 85×73×14	12	ODU 190×174×18	48	ODU 430×404×24	300
ODU 90×78×14	13	ODU 195×179×18	50	ODU 440×416×24	320
ODU 95×83×14	13	ODU 200×184×18	50	ODU 450×426×24	340
ODU 100×84×18	16	ODU 205×189×18	50	ODU 460×436×24	360
ODU 100×88×14	13	ODU 210×194×18	50	ODU 480×456×24	380
ODU 105×89×18	20	ODU 215×199×18	55	ODU 500×476×24	400
ODU 105×93×14	18	ODU 220×204×18	58		
ODU 110×94×18	20	ODU 225×209×18	60		
ODU 110×98×14	18	ODU 230×214×18	65		
ODU 115×99×18	20	ODU 235×219×18	65		
ODU 115×103×14	18	ODU 240×224×18	70		
ODU 120×104×18	22	ODU 245×229×18	70		

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

DHS 防尘密封圈(聚氨酯)

规格	价格	规格	价格	规格	价格
11.2×19.2×4.5/6	3	50×58×5/6.5	5	115×125×6/8	18
12×20×64.5/6	3	53×61×5/6.5	6	118×128×6/8	18
12.5×20.5×4.5/6	3	55×63×5/6.5	7	120×130×6/8	20
14×22×64.5/6	3	56×64×5/6.5	7	125×138×7/9.5	20
16×24×4.5/6	3	58×66×5/6.5	7	130×143×7/9.5	23
18×26×4.5/6	3	60×68×5/6.5	7.5	136×149×7/9.5	23
20×28×4.5/6	3	63×71×5/6.5	7.5	140×153×7/9.5	23
22×30×4.5/6	3.5	65×73×5/6.5	8	145×158×7/9.5	25
22.4×30.4×4.5/6	3.5	67×75×5/6.5	8	150×165×7/9.5	25
23.5×31.5×4.5/6	3.5	70×80×6/8	8.5	160×174×7/9.5	28
24.2×31.5×4.5/6	3.5	71×81×6/8	8.5	165×179×7/9.5	28
25×33×4.5/6	3.5	75×85×6/8	9	180×194×7/9.5	42
28.6×4.5/6×	3.5	80×90×6/8	9	200×214×7/9.5	43
30×38×5/6.5	4	85×95×6/8	9	205×214×7/9.5	45
31.5×39.5×5/6.5	4	90×100×6/8	10	210×224×7/9.5	55
32×40×5/6.5	4	95×105×6/8	12	210×226×7/9.5	55
35×43×5/6.5	4	98×108×6/8	13	220×234×7/9.5	58
35.5×43.5×5/6.5	4.5	100×110×6/8	15	230×244×7/9.5	58
38×46×5/6.5	4.5	105×115×6/8	15	250×264×7/9.5	70
40×48×5/6.5	4.5	110×120×6/8	16		
45×63×5/6.5	5	112×122×6/8	16		

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

UN 系列

规格	价格	规格	价格	规格	价格
3×6×2.1	3	12×25×8	3	17×28×7	6
4×7×2.1	3	12×25×10	3	18×24×5	3
4×10×4	3	12.5×20.5×5	3	18×24×6	3
6×12×4	3	14×20×5	3	18×24×8	3.6
8×12×5	3	14×20×6	3	18×25×5	3
8×14×4	3	14×20×8	3	18×26×5	3
8×14×6	3	14×22×5	3	18×26×6	3.6
8×14×8	3	14×22×6	3	18×26×7	3.6
8×16×4	3	14×22×8	3	18×26×8	3.6
8×16×6	3	14×24×5	3	18×28×5	3.6
8×18×8	3	14×24×8	3	18×28×6	3.6
8×22×10	3	14×25×8	3	18×28×8	3.6
10×16×4	3	14×26×5	3	18×30×6	3.6
10×16×4.5	3	14×28×10	4	18×30×8	3.6
10×16×6	3	15×22×5	3	18×32×7	3.6
10×16×8	3	15×22×6	3	18×34×8	3.6
10×18×5	3	15×22×8	3	19×26×5	3.6
10×18×6	3	15×25×5	3	20×26×3.3	3.6
10×18×8	3	15×25×6	3	20×26×5	3.6
10×20×5	3	15×25×7	3	20×26×6	3.6
10×20×6	3	15×25×8	3	20×28×5	3.6
10×20×7	3	15×30×6	3.6	20×28×6	3.6
10×20×8	3	15×30×8	3.6	20×28×7	3.6
10×22×6	3	15×30×10	4	20×28×8	3.6
10×22×8	3	16×22×5	3	20×30×5	3.6
11×18×6	3	16×22×6	3	20×30×6	3.6
11.2×19.2×5	3	16×22×7	3	20×30×8	3.8
12×18×5	3	16×22×8	3	20×30×10	5
12×18×6	3	16×24×4	3	20×32×6	3.6
12×18×8	3	16×24×5	3	20×32×8	3.6
12×20×5	3	16×24×6	3	20×33×8	3.6
12×20×6	3	16×24×8	3	20×33×10	5
12×20×8	3	16×25×5	6	20×34×12	5
12×22×5	3	16×26×5	3.6	20×35×6	3.6
12×22×6	3	16×26×6	3.6	20×35×7	3.6
12×22×7	3	16×26×7	3.6	20×35×8	3.6
12×22×8	3	16×26×8	3.6	20×35×10	4
12×24×6	3	16×28×6	3.6	20×36×8	4
12×24×8	3	16×28×8	3.6	20×38×10	8.5

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

UN 系列

规格	价格	规格	价格	规格	价格
20×40×10	8.5	25×33×8	3.6	28×43×10	8.5
20×40×12	10	25×33×10	4	28×44×8	6
22×28×8	3.6	25×35×5	3.6	30×36×8	5
22×30×5	3.6	25×35×6	3.6	30×37×6	4.6
22×30×6	3.6	25×35×7	3.6	30×38×6	6
22×30×7	3.6	25×35×8	3.6	30×38×7	6
22×32×5	3.6	25×35×10	4	30×38×8	6
22×32×6	3.6	25×36×6	3.6	30×40×6	3.8
22×32×8	3.6	25×38×8	4.6	30×40×7	6
22×34×10	4	25×38×10	8.5	30×40×8	6
22×35×6	3.6	25×40×6	4.6	30×40×10	8.5
22×35×7	3.6	25×40×7	8	30×40×12	10
22×35×8	3.6	25×40×8	4.6	30×42×7	4.6
22×35×10	4	25×40×10	8.5	30×42×8	4.6
22×38×8	3.6	25×42×8	4.6	30×42×10	10
22×40×10	8.5	25×43×6	4.6	30×43×10	10
22.4×30×5	3.6	25×45×10	8.5	30×45×6	5
22.4×32.4×8	3.6	25×50×10	12	30×45×7	5
23.5×31.5×5	3.6	26×32×4.7	5	30×45×8	5
24×32×5	3.6	26×36×8	4.6	30×45×10	8.5
24×32×6	3.6	26×36×10	8.5	30×46×10	10
24×32×7	3.6	27×35×5	4	30×47×10	10
24×34×5	3.6	28×35×5	4	30×48×10	10
24×34×6	3.6	28×35×6	4	30×50×8	6
24×34×7	3.6	28×35.5×5	3	30×50×10	10
24×36×6	4.6	28×36×5	5	30×50×12	10
24×36×8	4.6	28×36×6	5	30×52×10	12
25×32×4	4	28×36×7	5	30×55×10	12
25×32×5	3.6	28×36×8	5	31.5×41.5×6	4
25×32×6	4	28×38×6	5	31.5×46.5×10	8.5
25×32×7	3.6	28×38×7	6	32×38×8	10
25×32×8	3.6	28×38×8	6	32×40×5	5
25×33×5	3.6	28×38×10	8.5	32×40×5.5	5
25×33×6	3.6	28×40×8	6	32×40×6	5
25×33×7	3.6	28×40×10	8.5	32×40×8	6

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

UN 系列

规格	价格	规格	价格	规格	价格
32×40×10	8.5	35×55×12	15	40×53×8	7
32×42×6	4	35×60×12	18	40×55×7	8
32×42×8	6	35.5×45×6	4.6	40×55×7.2	8
32×42×10	8.5	35.5×50.5×10	13	40×55×8	10
32×43×6	6	36×46×6	6	40×55×9	10
32×45×6	6	36×46×7	6	40×55×10	10
32×45×8	6	36×46×10	10	40×60×10	13
32×45×10	10	36×48×8	6	40×60×12	13
32×46×10	10	36×51×10	13	40×62×12	14
32×47×8	8	36×48×10	12	40×65×10	15
32×47×10	10	38×45×6.5	12	40×65×12	15
32×48×8	8	38×46×6	10	42×50×6	6
32×48×10	10	38×46×6.5	6	42×50×8	6
32×50×10	12	38×48×6	5	42×52×6	6
35×43×5	5	38×48×10	5	42×52×8	8
35×43×6	6	38×50×6	6	42×52×10	12
35×43×7	6	38×50×8	6	42×55×7	7
35×43×8	7	38×50×9	6	42×55×8	7
35×43×10	10	38×50×10	10	42×55×10	12
35×45×6	4.6	38×52×10	10	42×62×12	13
35×45×7	6	38×55×10	10	43×65×10	20
35×45×8	6	38×58×10	13	44×54×6	7
35×45×10	10	38×60×10	15	45×52×8	6
35×47×7	8	38×62×12	16	45×53×6	6
35×47×6	6	40×48×5	6	45×53×8	6
35×48×7	6	40×48×6	6	45×53×10	10
35×48×8	6	40×48×8	6	45×55×6	5
35×48×10	10	40×48×10	10	45×55×7	5
35×50×6	10	40×50×4	8	45×55×8	7
35×50×8	10	40×50×6	5	45×55×10	8
35×50×9	12	40×50×7	6	45×56×7	6
35×50×10	9	40×50×8	7	45×57×6	10
35×50×12	12	40×50×9	8	45×56×10	8
35×52×8	10	40×50×10	13	45×58×6	10
35×52×10	10	40×52×8	8	45×58×10	10
35×55×10	13	40×52×10	12	45×60×8	10

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

UN 系列

规格	价格	规格	价格	规格	价格
45×60×9	10	50×65×12	16	56×66×10	14
45×60×10	12	50×68×10	16	56×76×12	16
45×60×12	15	50×70×8	14.5	58×68×6	6.5
45×62×10	11	50×70×10	14.5	60×68×8	7
45×63×8	8	50×72×12	20	60×70×6	7
45×63×10	10	50×70×12	14.5	60×70×7	8
45×63×12	12	50×75×12	20	60×70×8	8
45×65×10	12	52×62×12	14	60×70×10	14
45×65×12	13	53×63×6	5.5	60×70×12	14
45×70×12	14	53×63×6.5	8	60×71×7	7
45×70×16	20	53×63×8	6	60×72×10	14
48×58×6	6	53×63×7	8	60×73×8	10
48×58×8	6	53×63×10	12	60×73×10	14
48×58×10	8	53×63×12	12	60×75×8	12
48×60×8	10	53×65×8	8	60×75×9	14
48×63×10	12	53×70×10	15	60×75×10	14
50×57×10	7	53×73×12	15	60×75×12	16
50×58×6	6	55×63×8	8	60×76×10	18
50×58×8	6	55×65×6	5.5	60×76×12	18
50×58×10	14	55×65×7	7	60×80×10	16
50×60×6	5.2	55×65×8	8	60×80×12	18
50×60×7	6	55×65×9	11	60×80×18	20
50×60×8	8	55×65×10	10	60×85×10	16
50×60×10	10	55×65×12	12	60×85×12	18
50×60×12	12	55×68×10	10.4	60×90×15	23
50×62×10	13	55×70×8	8	61×71×7	7
50×62×12	14	55×70×9	14	62×70×10	14
50×63×6	8	55×70×10	14	62×72×10	14
50×63×8	8	55×70×12	18	62×75×10	14
50×63×10	12	55×71×12	18	62×75×12	14
50×63×12	12	55×72×10	14	62×80×10	18
50×65×6	6	55×75×10	16	62×82×10	18
50×65×8	7	55×75×12	16	62×82×12	20
50×65×9	10.4	55×80×12	18	63×73×6	7
50×65×10	12	56×66×6	6.5	63×73×8	10

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

UN 系列

规格	价格	规格	价格	规格	价格
63×73×10	14	68×80×10	16	75×95×8	18
63×73×12	16	67×87×12	20	75×95×9	18
63×75×6	8	70×78×8	16	75×95×10	20
63×75×10	14	70×78×10	16	75×95×12	20
63×75×12	16	70×80×5	8	75×95×13	25
63×78×10	16	70×80×6	8	75×100×12	25
63×80×10	18	70×80×8	8	78×88×8	20
63×80×12	20	70×80×9	10	80×90×6	9
63×83×10	16	70×80×10	16	80×90×8	12
63×83×12	20	70×80×12	16	80×90×9	18
64×74×6	8	70×82×10	16	80×90×10	18
64×80×8	8.5	70×82×12	20	80×90×12	18
64×80×13	20	70×83×13	18	80×94×10	20
65×73×8	10	70×84×10	16	80×95×9	18
65×75×6	7	70×85×8	10	80×95×10	20
65×75×7	8	70×85×9	16	80×95×12	18
65×75×8	8	70×85×10	16	80×100×10	20
65×75×9	10	70×85×12	18	80×100×12	21
65×75×10	14	70×90×10	18	80×100×13	25
65×75×12	14	70×90×12	20	80×100×15	28
65×79×10	16	70×90×15	25	80×105×10	22
65×80×9	16	70×95×12	25	80×105×12	25
65×80×10	16	71×80×6	9	80×110×12	25
65×80×11	18	71×91×12	20	80×110×15	30
65×80×12	18	73×85×10	20	80×120×12	30
65×85×10	20	75×85×6	8	85×95×6	9
65×85×12	20	75×85×8	16	85×95×8	12
65×90×10	22	75×85×10	16	85×95×8.5	9
65×90×12	22	75×85×12	18	85×95×9	15
67×77×6	8	75×90×9	18	85×93×9	18
68×80×8.5	16	75×90×10	20	85×95×10	18
67×77×12	16	75×90×12	20	85×95×12	20

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

UN 系列

规格	价格	规格	价格	规格	价格
85×100×9	13.5	95×115×15	29	106×126×15	41.5
85×100×10	20	95×120×12	28	110×120×8	15
85×100×12	25	95×120×15	40	110×120×9	15
85×105×12	25	98×112×9	17	110×120×12	25
85×105×15	26	100×110×5	11	110×120×14	30
86×98×10	20	100×110×12	22	110×125×9	25
85×110×12	22	100×110×8	15	110×125×10	30
87×97×12	22	100×110×9	18	110×125×12	28
88×100×12	25	100×112×9	22	110×125×15	36.5
90×100×6	10	100×110×14	25	110×125×16	38
90×100×8	10	100×112×10	22	110×130×9	32
90×100×9	12	100×115×9	18	110×130×10	35
90×100×10	20	100×115×10	25	110×130×12	32
90×100×12	20	100×115×12	25	110×130×15	40
90×100×14	25	100×115×15	25	110×130×14.5	43
90×105×9	15	100×120×10	28	110×130×16	41.5
90×105×10	20	100×120×12	28	110×140×15	40
90×105×12	25	100×120×15	36.5	112×125×9	25
90×110×9	22	100×125×10	28	112×132×15	40
90×110×10	22	100×125×12	28	112×132×16	41.6
90×110×12	22	100×125×15	38	115×125×12	30
90×110×13	25	100×130×15	40	115×130×9	25
90×110×15	29	105×115×9	22	115×130×10	32
90×115×12	22	105×115×12	25	115×130×12	32
90×115×15	25	105×120×8	16	115×130×15	40
90×120×12	28	105×120×9	20	115×132×15	43
95×105×9	20	105×120×12	28	115×135×12	32
95×105×10	20	105×120×15	30	115×135×15	42
95×105×12	20	105×125×12	28	115×140×12	38
95×110×9	16	105×125×13	36.5	117×130×12	50
95×110×10	22	105×125×15	36.5	118×132×9	40
95×110×12	22	105×125×16	36.5	118×138×15	42
95×115×12	22	105×130×12	40	118×132×10	40

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

UN 系列

规格	价格	规格	价格	规格	价格
118×138×16	42	135×160×15	65	160×180×15	80
118×132×12	40	136×150×9	30	160×180×16	80
120×130×8	20	140×150×11	42	160×180×18	100
120×130×12	32	140×150×12	45	160×185×12	80
120×135×9	30	140×155×9	30	160×185×16	85
120×135×12	32	140×155×10	40	160×185×18	100
120×140×10	38	140×155×15	35	160×190×15	110
120×140×12	38	140×155×16	55	165×180×9	50
120×140×15	44	140×160×12	45	165×180×15	85
120×140×16	44	140×160×15	50	165×185×15	95
125×140×9	30	140×160×16	50	165×190×15	110
125×140×11	38	140×170×15	75	165×190×19	150
125×140×12	38	145×160×9	30	170×180×12	80
125×140×15	45	145×160×12	50	170×185×9	80
125×145×12	38	145×160×15	50	170×190×12	60
125×145×15	45	145×170×15	75.5	170×190×15	70
125×145×16	45	150×165×9	45	170×195×12	100
125×150×15	54.5	150×170×10	50	170×195×15	100
130×140×12	35	150×170×12	50	170×195×16	100
130×145×9	30	150×170×15	55	170×200×12	130
130×145×12	38	150×170×16	55	170×200×15	110
130×145×15	45	150×180×12	80	170×200×18	120
130×150×12	40	150×180×15	85	175×195×15	120
130×150×15	50	150×180×18	90	175×200×15	100
130×150×16	46	155×170×9	55	175×200×16	110
130×160×15	65	155×180×15	90	175×205×15	250
130×165×15	65	160×170×12	50	180×190×10	100
132×150×15	45	160×175×9	45	180×200×10	90
135×150×9	30	160×175×12	55	180×200×12	75
135×150×10	35	160×175×15	65	180×200×15	90
135×150×12	42	160×175×16	65	180×200×16	90
135×155×12	42	160×180×12	65	180×205×12	100
135×155×15	54.5	160×180×14	85	180×205×15	110

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

UN 系列

规格	价格	规格		价格	规格	价格
180×205×16	110	200×225×20		130	240×265×16	160
180×205×18	120	200×230×15		130	240×265×18	180
180×210×15	130	200×230×18		150	240×270×18	200
180×210×22	130	200×235×20		160	250×270×12	100
180×215×15	150	205×230×20		160	250×270×15	160
180×220×16	200	210×225×15		150	250×270×18	180
185×195×12	100	210×230×12		130	250×275×18	190
185×200×9	100	210×230×15		135	250×275×19	190
185×200×10	100	210×235×15		135	250×280×18	195
185×200×12	100	210×235×18		140	250×280×19	200
185×200×15	100	210×240×15		140	250×280×25	210
185×205×15	125	210×240×18		145	260×280×18	195
185×210×15	130	215×240×15		145	260×290×18	200
185×210×16	130	215×240×16		130	265×295×19	210
185×215×15	130	215×240×18		130	275×300×16	195
190×210×9	130	220×240×12		100	280×300×15	150
190×205×15	100	220×240×15		120	280×300×16	185
190×205×16	100	220×240×16		130	280×300×18	200
190×210×12	100	220×245×18		160	280×310×20	220
190×210×15	110	220×250×15		160	280×320×20	240
190×210×16	110	220×250×18		160	290×320×18	220
190×215×12	100	220×250×22		160	300×330×18	230
190×215×15	110	225×240×12		150	300×330×19	230
190×215×16	110	225×250×12		160	310×340×22	250
190×220×15	120	225×250×19		150	320×350×22	260
190×220×16	120	230×250×12		90	330×350×15	230
190×220×22	130	230×250×15		150	330×360×22	260
195×215×12	140	230×250×16		160	340×370×22	260
195×220×16	120	230×250×18		180	350×380×22	270
200×215×12	110	230×255×18		165	355×385×22	290
200×220×12	90	230×260×18		180	360×390×22	300
200×220×15	100	230×260×22		180	370×400×22	330
200×220×16	110	235×255×12		170	400×436×25	380
200×220×18	125	235×260×19		200		
200×225×15	120	240×260×12		100		
200×225×16	120	240×260×16		130		

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

UHS 系列轴孔通用密封圈

规格	价格	规格	价格	规格	价格
28×33×3	2.5	25×33×6	4.5	67×77×6	9
4×13×5	2.5	25×35×6	4.5	70×80×6	10
5.5×12×6	2.5	28×35.5×5	4.5	71×85×6	1
6×12×5	2.5	30×37×6	5	75×85×6	10
8×16×6	2.5	30×38×5	5	80×90×6	10
10×18×5	2.5	30×40×6	4.5	85×100×9	15
10×18×6	2.5	31.5×41.5×6	4.5	90×105×9	16
10×18×5.8	2.5	32×40×5.5	4.5	95×110×9	16.5
10×20×6	2.5	32×40×6	4.5	98×112×9	18
11.2×19.2×5	2.5	32×42×6	4.5	100×115×9	18
12×18×6	2.5	32×46×6.4	5	105×120×9	21
12×20×5	2.5	34×40×6	4.5	110×125×9	23
12×20×6	2.5	35×43×6	4.5	112×125×9	23
12×25×5	2.5	35×45×5	5	115×130×9	25
12.5×20×5	2.5	35×45×6	5	120×135×9	25
14×22×5	2.5	35×45×7	5	125×140×9	26
15×24.8×5	2.5	36×46×6	5	130×145×9	26
16×16×6	2.5	35.5×45.5×6	5	132×145×9	28
16×22×5	2.5	38×48×6	5	136×150×9	28
16×24×5	2.5	40×48×5	5	140×155×9	28
18×25×5	0.3	40×50×6	6	145×160×9	29
18×26×4.5	0.3	45×55×6	6	150×165×9	30
18×26×5	0.25	45×56×7	6.5	160×175×9	35
20×26×5	0.28	50×58×6	6.5	165×180×9	40
20×28×5	0.28	50×60×6	6.5	175×190×9	45
20×30×6	0.3	50×60×7	6.5	180×200×12	60
21×29×5.5	0.3	53×62×4.5	6.5	190×210×12	65
22×30×6	0.3	53×63×6	7	200×220×12	80
22×32×6	0.3	55×65×6	7.5	230×250×12	130
22×34×6	0.3	56×66×6	8	240×260×12	140
22.4×30×5	0.3	58×68×6	8	250×270×12	150
22.4×30×6	0.3	60×70×6	9		
23.5×31.5×5	0.3	60×71×7	9		
24×32×5	0.3	63×73×6	9		
25×33×5	0.3	65×75×6	9		

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

J型-聚氨酯

规格	价格	规格	价格	规格	价格
14*22*4/7	3.50	110*124*8/12	13.00	245*263*9/14	50.00
16*24*4/7	3.50	115*129*8/12	16.00	250*268*9/14	50.00
18*28*5/9	3.80	120*134*8/12	17.00	260*278*9/14	53.00
20*30*5/9	3.80	125*139*8/12	18.00	270*288*9/14	55.00
22*32*5/9	3.80	130*144*9/14	23.00	280*298*9/14	56.00
48*58*6/10	4.50	135*149*9/14	25.00	290*308*9/14	58.00
50*60*6/10	4.50	140*158*9/14	26.00	300*318*9/14	60.00
55*67*7/11	6.00	145*163*9/14	27.00	320*338*9/14	63.00
56*68*7/11	6.00	150*168*9/14	29.00	340*358*9/14	70.00
60*72*7/11	6.50	190*208*9/14	35.00	360*378*9/14	85.00
63*75*7/11	6.50	195*213*9/14	36.00	380*398*9/14	98.00
65*77*7/11	7.00	200*218*9/14	38.00	400*418*9/14	110.00
70*82*7/11	7.50	205*223*9/14	36.00	420*438*9/14	140.00
75*87*7/11	8.00	210*228*9/14	40.00		
80*92*7/11	9.00	215*233*9/14	40.00		
85*97*7/11	9.00	220*238*9/14	40.00		
90*102*7/11	9.00	225*243*9/14	45.00		
95*107*7/11	10.00	230*248*9/14	48.00		
100*112*7/11	11.00	235*253*9/14	48.00		
105*117*8/12	13.00	240*258*9/14	49.00		

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

邢台久伟橡塑制品有限公司

DKBI 防尘系列

规格	价格	规格	价格	规格	价格
30*42*6/9	2	90*104*8/11	4		
32*44*6/9	2	95*109*8/11	4.6		
35*47*6/9	2.5	100*114*8/11	4.8		
40*52*6/9	2.5	105*121*8/11	5.5		
45*57*6/9	2.7	110*126*9/11	5.5		
50*62*6/9	3	115*131*9/12	6		
55*69*7/10	3	120*136*9/12	6		
60*74*7/10	3	130*146*9/12	8.5		
65*79*8/11	3.5	140*160*10/14	12		
70*84*8/11	3.5	150*160*10/14	14		
75*89*8/11	3.5	160*180*10/14	16		
80*94*8/11	4				
85*99*8/11	4				

HBY 系列

规格	型号	单价	规格	型号	单价
HBY	40×55.5×6.3	1.8	HBY	115×130.5×6	5.5
HBY	45×60.5×6.3	1.8	HBY	120×135.5×6	6
HBY	50×65.5×6.3	1.8	HBY	125×140.5×6	6.7
HBY	55×70.5×6	2.1	HBY	130×145.5×6	7.2
HBY	60×75.5×6	2.2	HBY	135×150.5×6	7.8
HBY	65×80.5×6	2.3	HBY	140×155.5×6	8.5
HBY	70×85.5×6	2.6	HBY	145×160.5×6	9
HBY	75×90.5×6	2.8	HBY	150×165.5×6	9.7
HBY	80×95.5×6	2.9	HBY	155×170.5×6	10.3
HBY	85×100.5×6	3.1	HBY	160×175.5×6	10.8
HBY	90×105.5×6	3.4	HBY	180×195.5×6	11.6
HBY	95×110.5×6	3.6			
HBY	100×115.5×6	4			
HBY	105×120.5×6	4.5			
HBY	110×125.5×6	4.9			

地址：河北省任县西刘工业区　　电话/传真：0319-7565985　　手机：13930916041

型号		价格	型号		价格	型号		价格
IDI	10×16×4.5	0.7	IDI	30×40×7	0.9	IDI	120×135×9	4.0
IDI	20×30×5	0.7	IDI	32×42×7	0.9	IDI	125×140×9	4.2
IDI	19×27×6	0.7	IDI	35×42×7	0.9	IDI	130×145×9	4.5
IDI	20×30×6	0.7	IDI	40×50×7	1.0	IDI	140×155×9	5.0
IDI	20×28×6	0.7	IDI	12×22×8	0.7	IDI	145×160×9	5.2
IDI	20×32×6	0.7	IDI	20×28×8	0.7	IDI	150×165×9	5.5
IDI	25×33×6	0.7	IDI	25×35×8	0.7	IDI	160×175×9	6.0
IDI	25×35×6	0.7	IDI	30×42×8	0.9	IDI	30×40×10	1.0
IDI	28×35×6	0.8	IDI	35×45×8	0.9	IDI	35×50×10	1.4
IDI	28×36×6	0.8	IDI	30×50×8	1.0	IDI	40×50×10	1.0
IDI	28×38×6	0.8	IDI	30×38×8	0.9	IDI	45×60×10	1.5
IDI	27×38×6	0.8	IDI	30×40×8	0.9	IDI	50×65×10	1.6
IDI	27×35×6	0.8	IDI	40×50×8	1.0	IDI	55×68×10	1.6
IDI	30×37×6	0.9	IDI	48×62×8	1.1	IDI	60×73×10	1.7
IDI	30×38×6	0.9	IDI	45×55×8	1.1	IDI	65×78×10	1.8
IDI	30×40×6	0.9	IDI	50×60×8	1.1	IDI	70×80×10	1.4
IDI	32×40×6	0.9	IDI	38×50×9	1.3	IDI	70×83×10	2.2
IDI	35×45×6	0.9	IDI	80×90×9	1.5	IDI	70×85×10	2.2
IDI	38×50×6	1.0	IDI	45×60×9	1.5	IDI	70×90×10	2.8
IDI	40×50×6	1.0	IDI	50×65×9	1.6	IDI	75×88×10	2.2
IDI	45×55×6	1.0	IDI	55×70×9	1.7	IDI	75×90×10	2.2
IDI	50×60×6	1.1	IDI	60×75×9	1.8	IDI	75×95×10	3.0
IDI	53×63×6	1.1	IDI	65×80×9	2.0	IDI	80×93×10	2.3
IDI	60×70×6	1.3	IDI	70×85×9	2.2	IDI	80×95×10	2.3
IDI	70×80×6	1.3	IDI	75×90×9	2.2	IDI	85×100×10	2.6
IDI	75×85×6	1.5	IDI	80×95×9	2.3	IDI	90×105×10	3.0
IDI	80×90×6	1.6	IDI	85×100×9	2.6	IDI	90×110×10	3.5
IDI	90×100×6	2.0	IDI	90×105×9	3.0	IDI	95×110×10	3.2
IDI	140×150×6	4.5	IDI	95×110×9	3.0	IDI	100×115×10	3.3
IDI	155×165×6	4.8	IDI	100×115×9	3.3	IDI	105×120×10	3.8
IDI	40×50×6.5	1.0	IDI	105×120×9	3.8	IDI	110×120×10	3.0
IDI	50×63×6.5	1.3	IDI	110×125×9	3.8	IDI	115×130×10	4.0
IDI	17×27×7	0.7	IDI	110×130×9	3.8	IDI	110×125×10	3.8
IDI	19×27×7	0.7	IDI	115×130×9	3.8	IDI	120×130×10	3.8
IDI	28×36×7	0.7	IDI	118×133×9	4.0	IDI	120×135×10	4.0
IDI	40×55×12	1.4	IDI	190×215×16	15.5	IDI	190×215×16	15.5
IDI	28×36×7	0.7	IDI	100×120×12	4.5	IDI	220×240×12	12.0
IDI	40×55×12	1.4	IDI	100×125×12	5.5	IDI	110×125×12.5	4.2
IDI	50×63×12	1.6	IDI	105×125×12	4.7	IDI	90×110×13	4.3
IDI	50×65×12	1.8	IDI	110×130×12	5.0	IDI	110×130×13	5.0
IDI	60×80×12	2.8	IDI	115×135×12	4.8	IDI	70×90×15	3.5
IDI	70×90×12	3.3	IDI	120×140×12	5.2	IDI	105×125×15	5.6

IDI	75×95×12	3.4	IDI	125×145×12	6.6	IDI	115×135×15	6.2
IDI	80×100×12	3.6	IDI	130×150×12	6.4	IDI	120×140×15	6.7
IDI	85×105×12	3.8	IDI	140×160×12	6.8	IDI	125×145×15	7.6
IDI	90×110×12	4.0	IDI	160×180×12	7.3	IDI	140×160×15	8.2
IDI	90×115×12	5.0	IDI	180×200×12	9.0	IDI	160×180×16	9.2
IDI	95×115×12	4.2	IDI	200×220×12	10.0	IDI	170×190×16	11.0
IDI	180×205×16	14.0						